

General	
Shape	Round
Seating Capacity	7+
Shell Material	Ultralife™ / Granitex™
Dimensions	87" Diameter x 36" H / (221cm Diameter x 91cm H)
Corner Radii	n/a
Water Capacity	340 Gallons (1287 Liters)
Dry Weight	560 lbs (254 kg)
Shipping Weight	Domestic 560 lbs (254 kg) - Export 610 lbs (277 kg)
Full Weight	3395 lbs (1540 kg)
Skirt Material	Wood
Poly Floor	Yes

Water System	
Water Treatment System	Crystal Zone™
Plumbing Systems	2
Filters/Coverage	1 / 75 sq. ft.
Gate Valves	2
VCR Jet® - Air Adjustable/Directional	2
VCR Jet® - Rotator	6
VCR Jet® - Dual Rotator	0
VCR Jet® - Multi Port Spinner	0
VCR Jet® - Mini Rotator	2
VCR Jet® - Mini Directional	2
VCR Jet® - Euro Directional	0
VCR Jet® - Euro Rotator	0
VCR Jet® - Mini Directional in NFJ	0
Typhoon Jet	2
Ozone Jet	1
Heater Return Jet	1
Pump Returns	2
Diverter Valves	1
Floor Drains	1
Skimmer	8" Weir


Special Features	
Dynamic Massage Sequencer w/ control panel	No
NeckFlex® Jet Pillows	0
Headrest Pillows	0
Stereo system	not available
Water Feature	n/a
Water Feature Volume control	n/a
Cup Holders	0
Tactile Therapy	Floor pedestal

Pump Information		Domestic (60Hz)	Export (50Hz)
Motor Size – Peak (Continuous) HP		4.0 (2.5) Hp	3.6 (2.0) HP
Jet Pumps # of Pumps/Speed		One / Dual	One / single
Circulation pump		1	1
Fountain pump		n/a	n/a
Electrical System		Domestic (60Hz)	Export (50Hz)
Voltage		240	240
Amperage		40/30	1X16 / 2X16 / 1X32
Heater		FastFlo 2.7,4.0,5.5 kW	FastFlo 2.9 kW
Thermostat		Electronic	Electronic
Light		1 with optional LED	Multi color LED
Control System		MSPA-MP-D12	MSPA-MP-D11-CE
Upper Control		Scrolling Message Center	Scrolling Message Center
Auxiliary Upper Control		No	No
Programmable		Yes	Yes



Note: 1. Subject to change without notice.

2006 Arena Architectural Specification

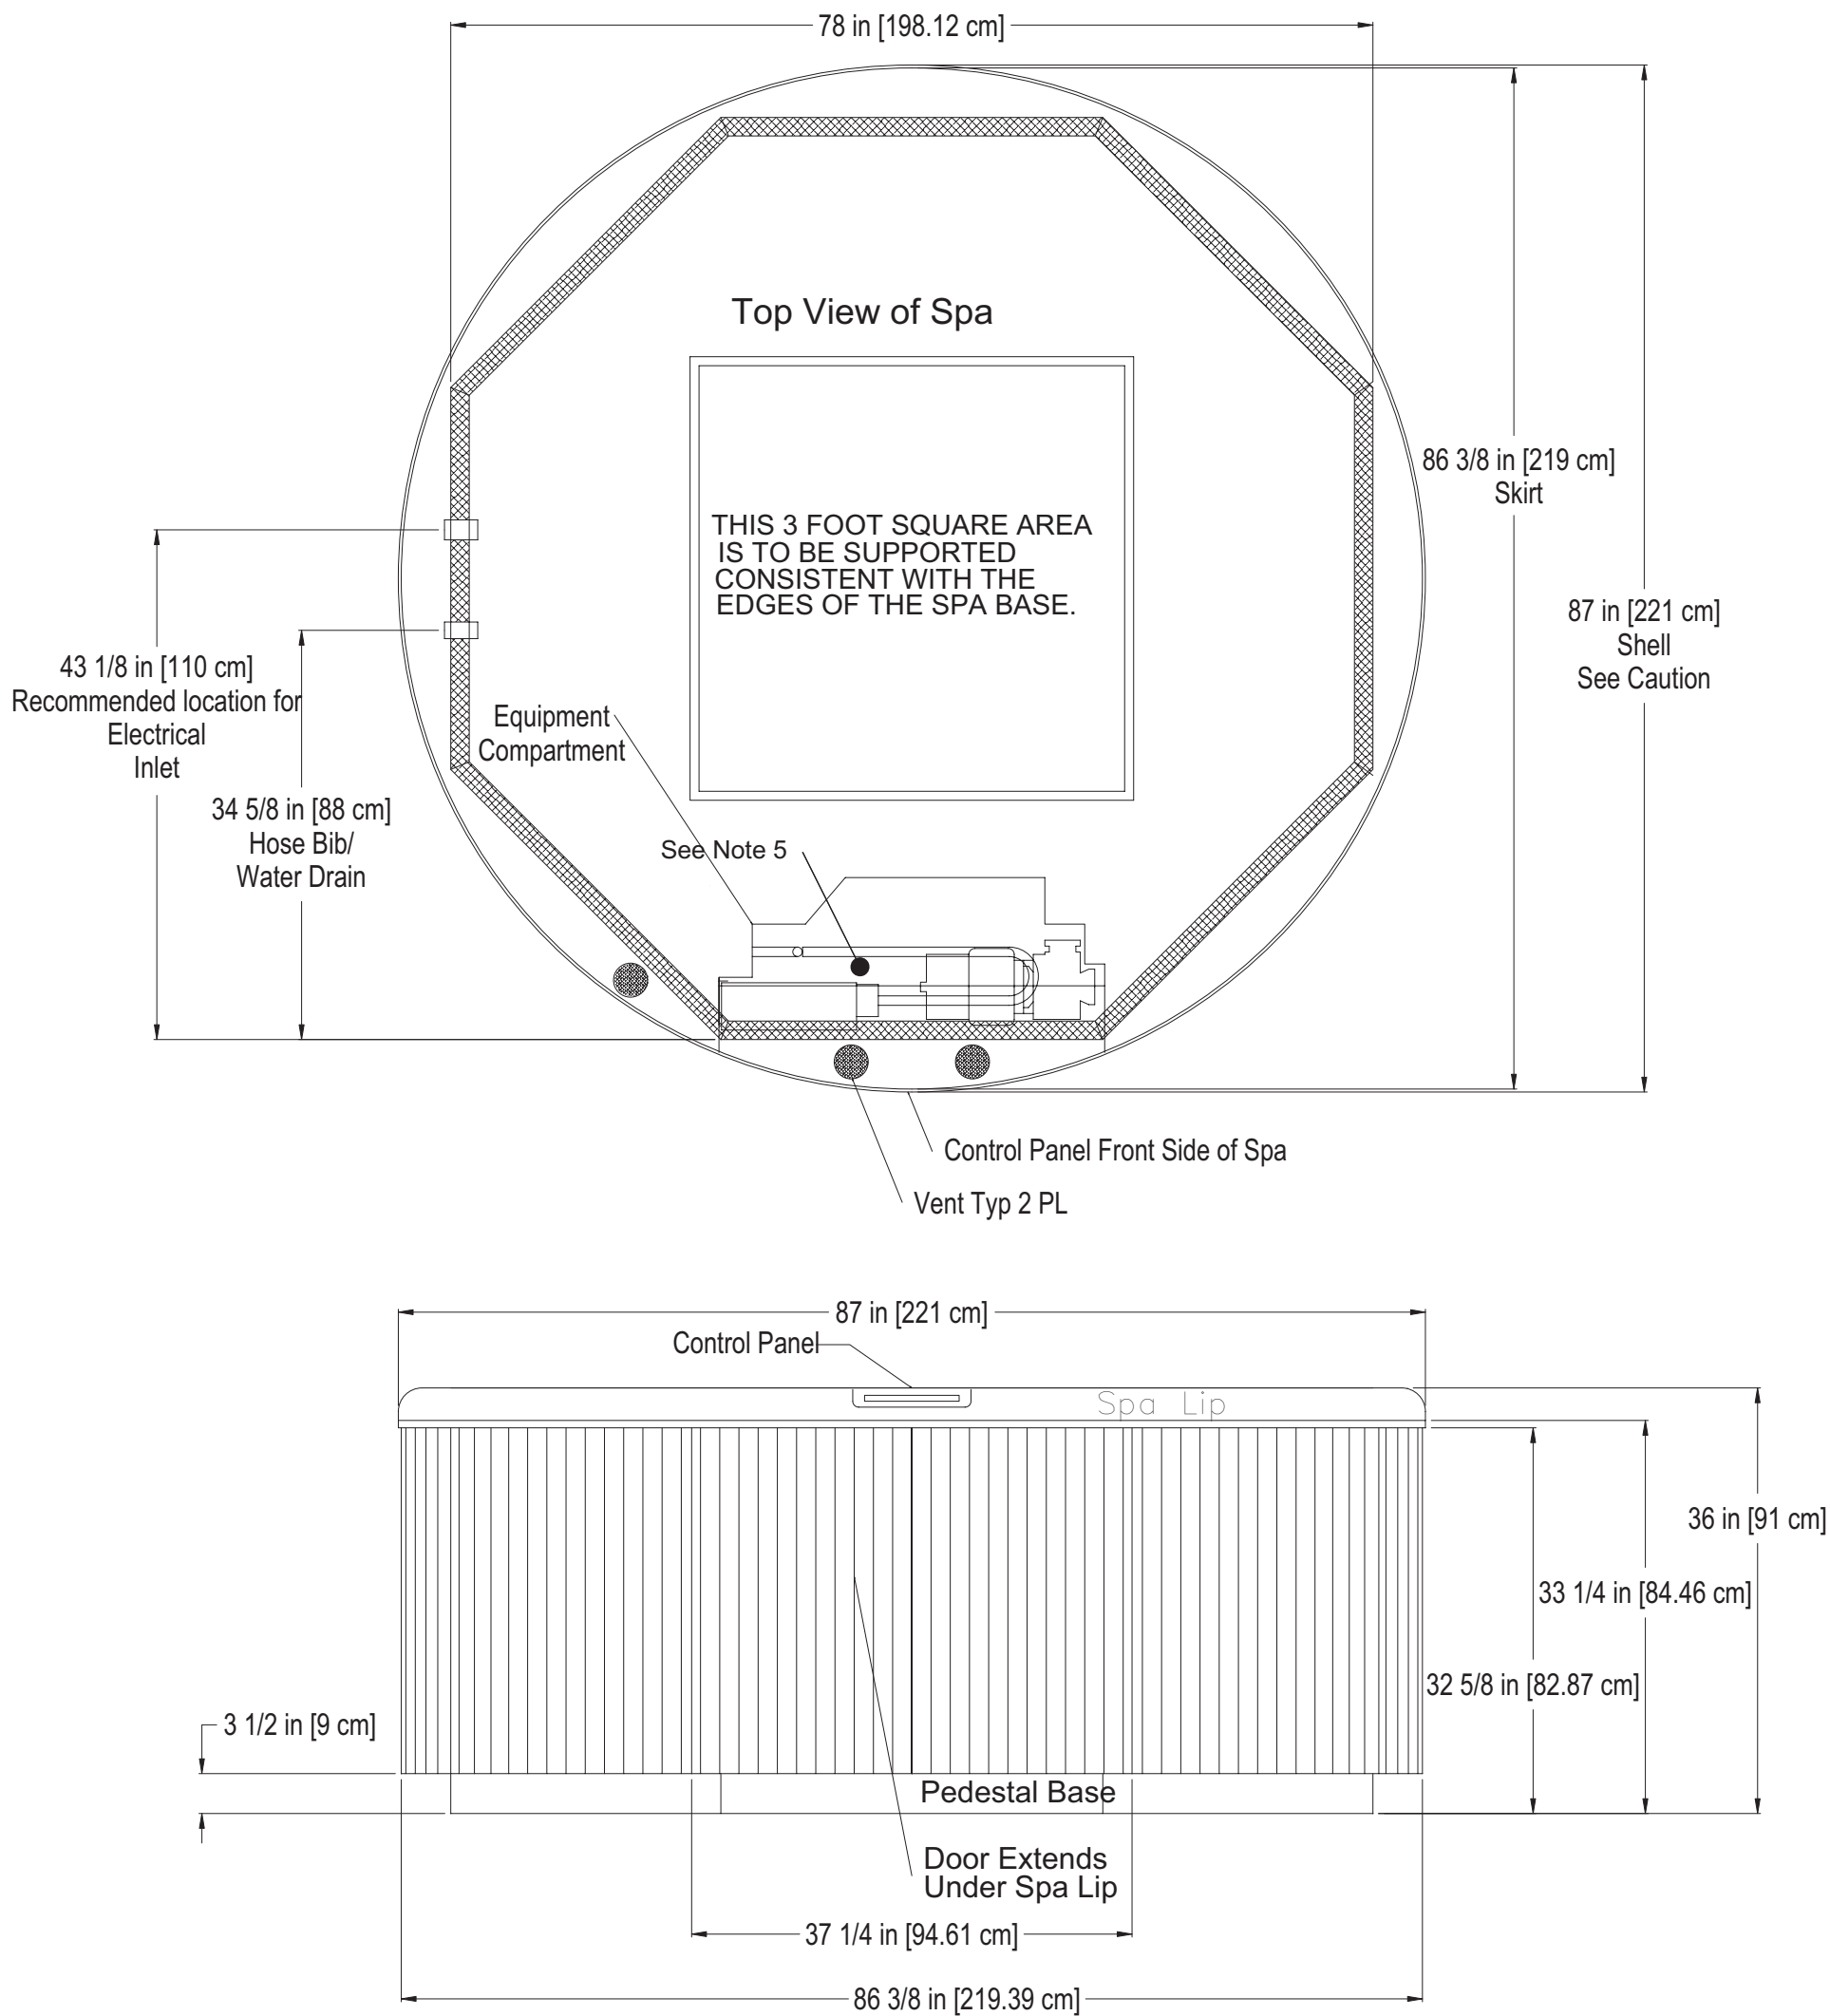

- Note: 1. Subject to change without notice.
2. Engineering specs may differ slightly from brochure.
3. For E-Z lifter installation allow 18" clearances on the backside of the spa.
4. Alternative cabinets may add significant weight. Ask your dealer for exact details
5. This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa.
Be careful not to puncture a plumbing line inside the equipment compartment(drill from the inside compartment out).

Caution:
Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above.
If site planning is critical to such tolerances, be sure to measure your actual spa.