

Quick Start Guide

INSTEON® On/Off Module

Models: 2633-422, 2633-432, 2633-442, 2633-522



2633-442
(UK)



2633-522
(Aus/NZ)



2633-432
(Germany)



2633-422
(France)

Install INSTEON On/Off Module


- 1) Turn on lamp or appliance
- 2) Unplug lamp/appliance and plug it into On/Off Module receptacle
- 3) Plug On/Off Module into unswitched wall outlet

Load will turn on and On/Off Module LED will turn on green

Make On/Off Module a Responder

- 1) Press and hold controller button until it beeps
Controller LED will start blinking
- 2) Tap On/Off Module on (or off if you want the load to turn off when the scene is activated)
- 3) Press and hold On/Off Module set button until it double-beeps
Controller will double-beep and its LED will stop blinking
- 4) Test link by tapping controller button on and off

Connected load will return to the state set in step #2

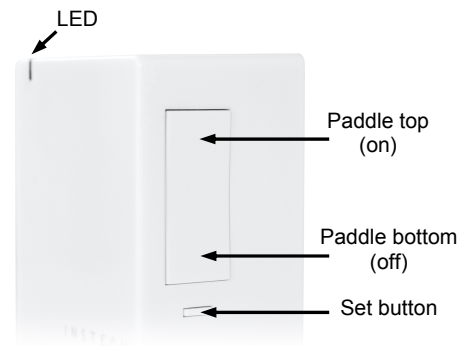

Assign an X10 Address

- 1) Press and hold On/Off Module set button until it beeps
On/Off Module LED will start blinking green
- 2) Send the X10 address 3 times (with or without commands)
Example: A1-A1-A1-AON or A1-AON-A1-AON-A1-AON
On/Off Module will double-beep and its LED will stop blinking
- 3) Test by sending X10 on and off commands
Load will turn on and off

Owner's Manual and Tech Support

Visit: <http://www.insteon.com/support> for complete manual, online tech support and latest product documents.

Call: INSTEON Support Line at 866-243-8022