

# Up-Flow Gas Furnaces

90% AFUE GAS FURNACES  
Weil-McLain

90% AFUE




## Standard Features:

- 90%+ AFUE Efficiency With Weldless Tubular Heat Exchanger
- Up-Flow and Applications
- Self Diagnosing Control System
- Patented High Temperature Limit System
- Easy Service Access With No Door Switches
- Power Terminals Provided For Humidifier And Electronic Air Cleaner
- 20 - Year Limited Heat Exchanger Warranty
- 5 - Year Limited Parts Warranty




# Gas Furnaces

Natural Gas to Propane (LP) Conversion Kits Available

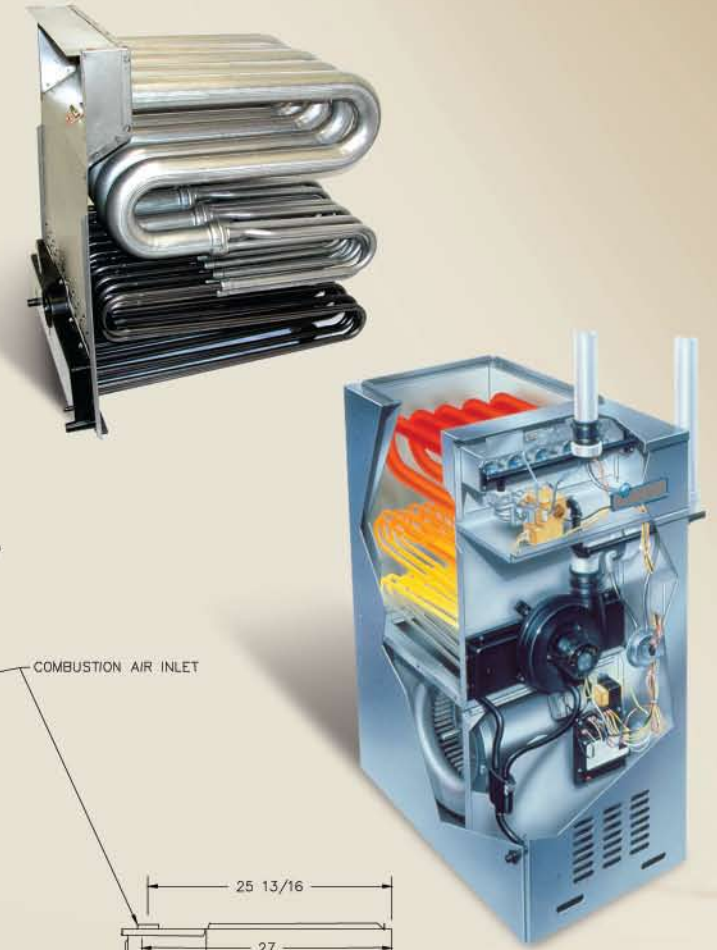

## Up-Flow Model Shown

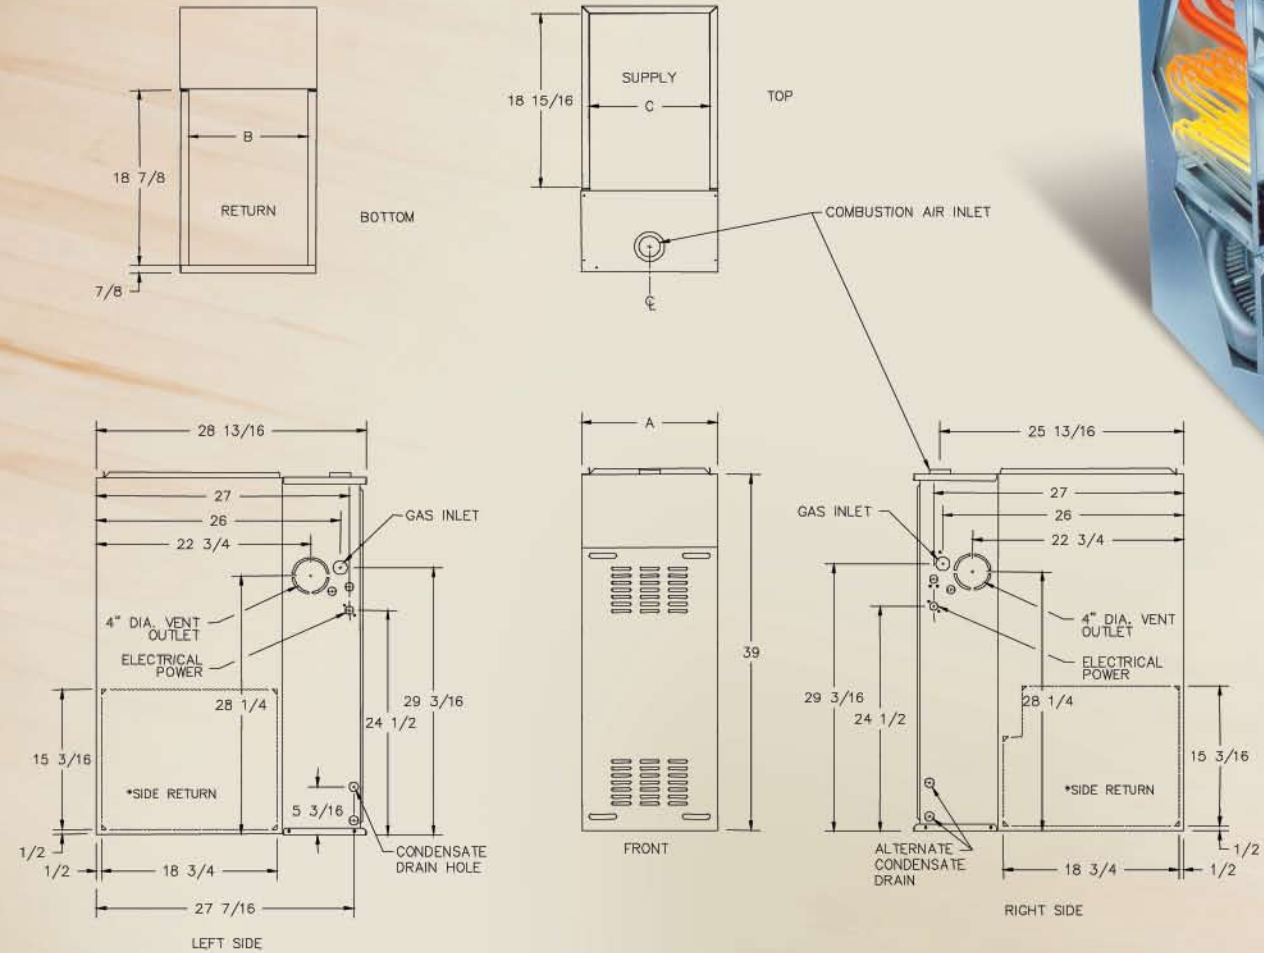

### Up-Flow Models 90.9% AFUE

Model	BTUH (input)	BTUH (output)	Max Cooling Tons	Blower (Direct Drive) Motor (HP)	Shipping Weight (lbs)	Cabinet Width (A)	Plenum Openings				High Speed CFM @ 0.5 Inches W.C.	Vent Size Inches*		
							Supply (C) Width	Supply (C) Depth	Return (B) Width	Return (B) Depth		Intake	Exhaust	
WMVSA054NH3R	54,000	49,300	3	1/3	10-6	122	17 1/2"	15 15/16"	18 15/16"	15 3/4"	18 7/8"	1,140	2	2
WMVSA072NH3R	72,000	65,700	3	1/2	10-8	131	17 1/2"	15 15/16"	18 15/16"	15 3/4"	18 7/8"	1,299	2 or 3	2 or 3
WMVSA072NH4R	72,000	65,700	4	3/4	Dual 10-4	141	20 1/2"	18 15/16"	18 15/16"	18 3/4"	18 7/8"	1,507	2 or 3	2 or 3
WMVSA090NH3R	90,000	82,100	3	1/2	10-8	145	17 1/2"	15 15/16"	18 15/16"	15 3/4"	18 7/8"	1,316	2 or 3	2 or 3
WMVSA090NH4R	90,000	82,100	4	3/4	Dual 10-4	150	20 1/2"	18 15/16"	18 15/16"	18 3/4"	18 7/8"	1,683	2 or 3	2 or 3
WMVSA108NH5R	108,000	98,600	5	3/4	Dual 10-6	174	23 1/2"	21 15/16"	18 15/16"	21 3/4"	18 7/8"	1,807	3	3
WMVSA126NH5R	126,000	115,000	5	3/4	Dual 10-6	193	23 1/2"	21 15/16"	18 15/16"	21 3/4"	18 7/8"	1,827	3	3

\*Vent size will depend upon vent length and number of elbows. Please review installation manual.

