



Designer Series Gas Griddles

Designer Series Gas Griddles

Item: _____
 Quantity: _____
 Project: _____
 Approval: _____
 Date: _____

Models:

- | | | |
|-----------------------------------|-----------------------------------|-----------------------------------|
| <input type="checkbox"/> GD-15G | <input type="checkbox"/> GD-24G | <input type="checkbox"/> GD-36G |
| <input type="checkbox"/> GD-15GTH | <input type="checkbox"/> GD-24GTH | <input type="checkbox"/> GD-36GTH |
| <input type="checkbox"/> GD-15GFF | <input type="checkbox"/> GD-24GFF | <input type="checkbox"/> GD-36GFF |



Model GD-24G

Standard Features:

- "CE" approved models have suffix FF and are equipped with Flame-Failure protection, Flame Failure protection is not available on thermostat controlled (GTH) models
- Stainless steel front and black painted sides
- 4" (102mm) Sanitary legs
- Easy clean design
- 18" (457mm) deep cooking surface
- Piezo spark ignition
- Rear gas connection w/pressure regulator
- Hi-Lo Valve control, models have suffix G
- Thermostat control models have suffix GTH
- Natural or propane gas
- 20,000, 40,000 or 60,000 BTU total input

Optional Features:

- Stainless steel sides
- Stainless steel back and bottom
- Fully grooved griddle, add suffix U (i.e. GD-15GU) or grooved sections, add U1 for 12" (305mm) on left side and U2 for 24" (610mm) on left side

Note : Stands are available see form # CS24/CSD

Specifications:

Gas designer series griddles in three widths: models GD-15G(GTH), 15" (381mm) wide; GD-24G(GTH), 24" (610mm) wide and GD-36G(GTH), 36" (914mm) wide. Designed as free standing or to be banked with other GD series equipment. 24" (610mm) deep x 15" (381mm) high, easy clean design with stainless steel front and black painted sides, fully grooved or grooved section griddle available. Griddles valve (G) or thermostat (GTH) controlled, piezo spark ignition, natural or propane gas, input ratings of 20,000, 40,000 and 60,000 BTU. "CE" approved models have suffix FF and are equipped with Flame-Failure protection. Flame Failure protection is not available on thermostat controlled (GTH) models



Garland Commercial Industries, LLC
 185 East South Street
 Freeland, PA 18224
 Phone: (570) 636-1000
 Fax: (570) 636-3903

Garland Commercial Ranges Ltd
 1177 Kamato Road,
 Mississauga, Ontario
 L4W 1X4 CANADA
 Phone: 905-624-0260
 Fax: 905-624-5669

Enodis UK LTD
 Swallowfield Way,
 Hayes, Middlesex
 UB3 1DQ ENGLAND
 Telephone: 081-561-0433
 Fax: 081-848-0041




MODEL	Over All Dimensions			Total Input BTU/Kw	CU. Ft.	Ship Wt Lb/kg
	Width	Height	Depth			
GD-15G (FF), GD-15GTH	15" (381mm)	15" (381mm)	24" (610mm)	20,000/5.86	5	85/39
GD-24G (FF), GD-24GTH	24" (610mm)	15" (381mm)	24" (610mm)	40,000/11.72	8	146/66
GD-36G (FF). GD-36GTH	36" (914mm)	15" (381mm)	24" (610mm)	60,000/17.58	1	200/91

Gas Input ratings shown here are for installations up to 2,000 ft. (610m) above sea level. Specify altitudes over 2,000 ft.

Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

Clearances To Combustible Wall		Floor or Base
Sides	Back	
6" (152mm)	6" (152mm)	Combustible

Manifold Inlet Size NPT	Manifold Operating Pressure			
	Natural		Propane	
	"WC	mbar	"WC	mbar
3/4"	4.0	10	10	24.9

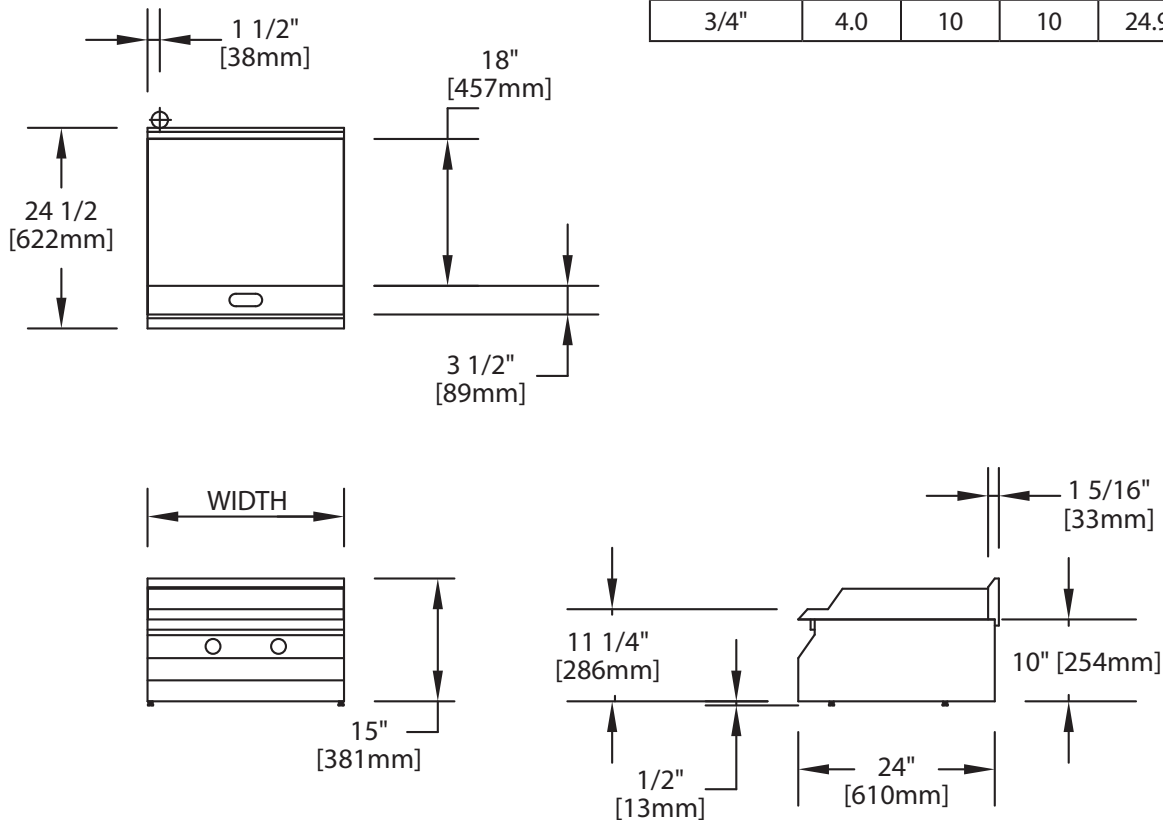

Form# GDG/GDGTH Series (05/07)