

EARTHQUAKE EARTHQUAKE SOUND

Sound That Will *Move* You


DB Subwoofer Installation & Reference Manual

DB Subwoofers

DB-10

DB-12

DB-15

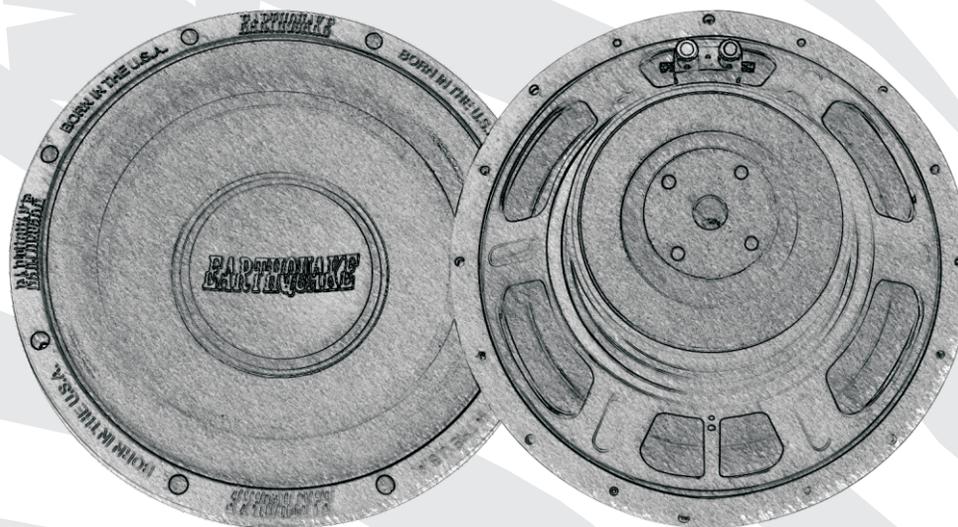

www.earthquakesound.com

Earthquake Sound Corporation • 2727 McCone Avenue Hayward, CA 94545 • Ph: (510) 732-1000 Fax (510) 732-1095

EARTHQUAKE • DB SPECIFICATIONS

Dear Valued Customer,

Earthquake Sound Corporation, located in Hayward California at the heart of the San Francisco Bay Area; specializes in manufacturing high end car audio products ranging from the smallest titanium tweeter to the world's largest amplifier. In its dedication to excellence, Earthquake has maintained extensive programs in research and development to provide you with the highest quality mobile audio products.

This owners manual is designed to better acquaint you with Earthquake products and to guide you through all phases of system design and application. It is imperative that you read this manual in its entirety. Earthquake technicians and staff are looking forward to answering any questions you might have.

DB SINGLE VOICE COIL SUBWOOFER SPECIFICATIONS

DRIVER:	DB-10	DB-12	DB-15
Frequency Response	26Hz - 1.3k	25Hz - 1.1k	23Hz - 1.1k
Electrical "Q" (Qes)	0.76	0.93	1.08
Mechanical "Q" (Qms)	8.35	8.44	9.33
Total Speaker "Q" (Qts)	0.70	0.93	0.96
One way linear excursion	.75 in. / 19.05mm	.75in. / 19.05mm	1 in. / 25.4 mm
Efficiency (1W/1M)	87 dB SPL	89 dB SPL	91 dB SPL
BL	11.1TM	11.2TM	12.4TM
VAS	30.5 Lit / 1.076ft ³	62.2 Lit / 2.195ft ³	95.4 Lit / 3.367ft ³
Nominal Impedance	4-Ohm	4-Ohm	4-Ohm
Recommended Power	350 WRMS 800 Watts MAX	400 WRMS 1000 Watts MAX	450 WRMS 1200 Watts MAX


CAUTION: Earthquake's DB subwoofers are capable of generating high sound pressure levels. You should exercise caution when operating our subwoofers and amplifiers. Long term exposures to high levels of sound pressure will cause permanent hearing damage. Sound pressure levels exceeding 85dB can be dangerous with constant exposure. Earthquake Sound Corporation does not assume liability for damages resulting from the direct use of DB or other Earthquake products, and urges users to play sound systems at moderate listening levels for every day use.

Specifications are subject to change without notice.


EARTHQUAKE SOUND • SUBWOOFER SPECIFICATION CHARTS

EARTHQUAKE • DB ENCLOSURE DESIGNS


- * External dimensions provided using 3/4" MDF
- * Enclosures are designed to play at 44Hz and up.
- * Enclosure designs constructed using 3/4" MDF wood.



Sealed Recommended

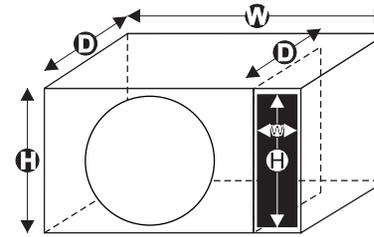

Ported

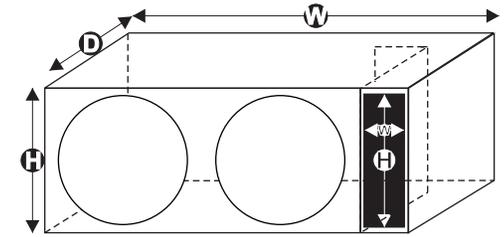

Dual Subwoofers

DB-10

DB-10 Sealed
 Range: 0.6 cu. ft. - 1.25 cu. ft.
 H: 11.5"
 W: 12"
 D: 12.5"

DB-10 Ported
 Range: 0.6 cu. ft. - 1.25 cu. ft.
 H: 11.5"
 W: 14.75"
 D: 13.5"
 Port: 10" x 1" x 8"

DB-10 Dual Subwoofer
 Range: 2.0 cu. ft. - 2.5 cu. ft.
 H: 11.5"
 W: 29.5"
 D: 13.5"
 Port: 10" x 1" x 16"

DB-12

DB-12 Sealed
 Range: 0.9 cu. ft. - 1.25 cu. ft.
 H: 16"
 W: 14"
 D: 13"

DB-12 Ported
 Range: 0.8 cu. ft. - 1.25 cu. ft.
 H: 16"
 W: 16"
 D: 15.5"
 Port: 14.5" x 2" x 8"

DB-12 Dual Subwoofer
 Range: 3.5 cu. ft. - 4.0 cu. ft.
 H: 16"
 W: 32"
 D: 15.5"
 Port: 14.5" x 2" x 16"

DB-15

DB-15 Sealed
 Range: 1.8 cu. ft. - 2.5 cu. ft.
 H: 18"
 W: 18"
 D: 16"

DB-15 Ported
 Range: 2.3 cu. ft. - 4.2 cu. ft.
 H: 18"
 W: 18.25"
 D: 17.5"
 Port: 16.5" x 3" x 16"

DB-15 Dual Subwoofer
 Range: 5.3 cu. ft. - 6.0 cu. ft.
 H: 18"
 W: 36.5"
 D: 17.5"
 Port: 16.5" x 3" x 16"

Specifications are subject to change without notice. Tuning frequency may vary depending on the box volume.

HOW TO WIRE YOUR EARTHQUAKE SUBWOOFER

WIRING CONFIGURATIONS

According to Ohm laws, when speakers are wired in parallel. The formula is:

$$\frac{1}{R} = \frac{1}{R1} + \frac{1}{R2} + \frac{1}{R3} + \dots + \frac{1}{Rn}$$


Where R= Total system impedance

Series formula:


$$Rt = R1 + R2 + R3 + \dots$$

Where Rt= Resistance seen by amplifier


Study sample diagram below, then follow charts to the left.

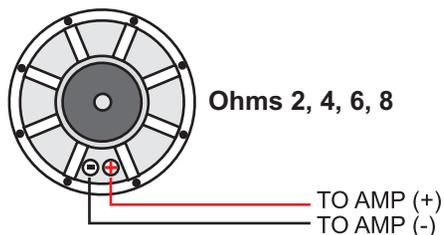


If using SINGLE 2 OHM coils the total load would be 2.0 ohm
 If using SINGLE 4 OHM coils the total load would be 4.0 ohm
 If using SINGLE 6 OHM coils the total load would be 6.0 ohm
 If using SINGLE 8 OHM coils the total load would be 8.0 ohm

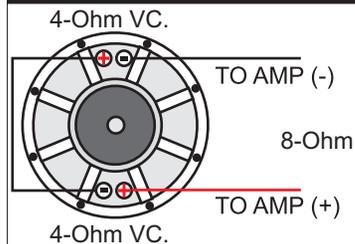


Example for Dual-4 series

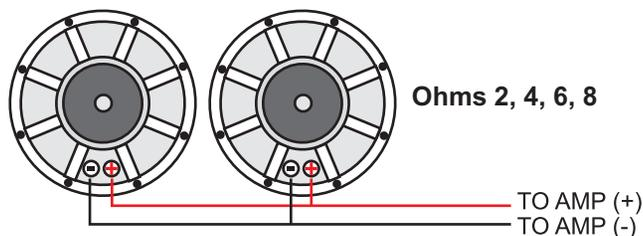


If using SINGLE 2 OHM coils the total load would be 1.0 ohm
 If using SINGLE 4 OHM coils the total load would be 2.0 ohm
 If using SINGLE 6 OHM coils the total load would be 3.0 ohm
 If using SINGLE 8 OHM coils the total load would be 4.0 ohm

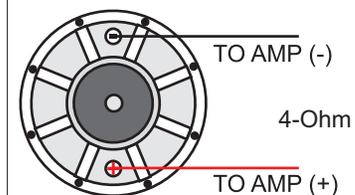


Example for single-4

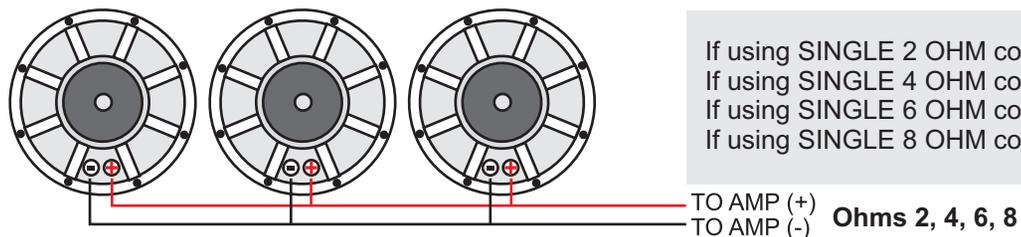

If using SINGLE 2 OHM coils the total load would be .66 ohm
 If using SINGLE 4 OHM coils the total load would be 1.3 ohm
 If using SINGLE 6 OHM coils the total load would be 2 ohm
 If using SINGLE 8 OHM coils the total load would be 2.7 ohm

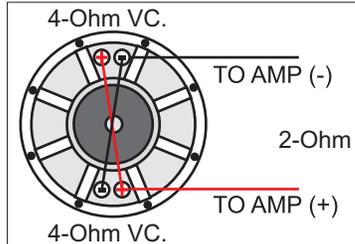

Example Dual-4 Parallel

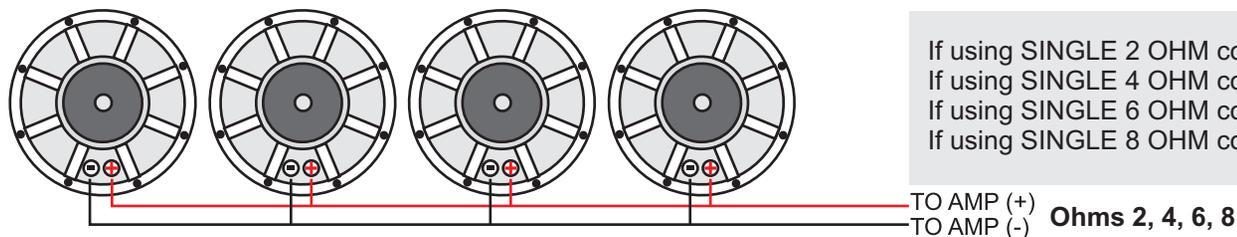

If using SINGLE 2 OHM coils the total load would be 0.5 ohm
 If using SINGLE 4 OHM coils the total load would be 1.0 ohm
 If using SINGLE 6 OHM coils the total load would be 1.5 ohm
 If using SINGLE 8 OHM coils the total load would be 2 ohm

EARTHQUAKE SOUND 5-YEAR LIMITED WARRANTY

Five (5) year limited warranty

Earthquake warrants the original purchaser that all Factory Sealed New Audio Products to be free from defects in material and workmanship under normal and proper use for a period of five (5) years from the date of purchase (as shown on the original bill of sale with serial number affixed/written on it). The five (5) year warranty period is valid only if an authorized Earthquake dealer properly installs the product and the warranty registration card is properly filled out and sent to Earthquake Sound Corporation. If a non-authorized party installs the product, a ninety (90) day warranty period will be applied.

(A) Five (5) years limited warranty plan coverage guidelines:

- ? **First year:** Earthquake pays for labor, parts, and ground freight (only in US mainland, not including Alaska and Hawaii. Shipping to us is not covered).
- ? **Second year:** Earthquake pays for labor and parts only, customer must pay freight both ways.
- ? **Third, fourth & fifth year:** Earthquake pays labor only. Customer must pay for parts and freight both ways.

(B) Warning:

Products (sent for repair) that are tested by Earthquake technicians and deemed to have no problem(s) will not be covered by the five (5) year limited warranty. Customer will be charged a minimum of one (1) hour of labor (at the ongoing rates) plus shipping charges back to customer.

(C) Earthquake will repair or replace at our option all defective products/parts subject to the following provisions:

- ? Defective products/parts have not been altered or repaired by other than an Earthquake factory-approved technicians.
- ? Products/parts are not subjected to negligence, misuse, improper use or accident, damaged by improper line voltage, used with incompatible products or have its serial number or any part of it altered, defaced or removed, or have been used in any way that is contrary to Earthquake's written instructions.

(D) Warranty Limitations:

Warranty does not cover products that have been modified or abused, including but not limited to the following:

- ? Damages to speaker cabinet and cabinet finish due to misuse, abuse or improper use of cleaning materials/methods.
- ? Bent speaker frame, broken speaker connectors, holes in speaker cone, surround dust cap, burnt speaker voice coil.
- ? Fading and/or deterioration of speaker components & finish due to improper exposure to elements.
- ? Bent amplifier casing, damaged finish on the casing due to abuse, misuse or improper use of cleaning material.
- ? Burnt tracers on PCB.

Specifications are subject to change without notice.

EARTHQUAKE SOUND • 5-YEAR LIMITED WARRANTY

- ? Product/part damaged due to poor packaging or abusive shipping conditions.
- ? Subsequent damage to other products.

A warranty claim will not be valid if the warranty registration card is not properly filled & returned to Earthquake with a copy of the sales invoice. Warranty card is located on the last page of this manual.

(E) Service Request:

To receive product service, contact Earthquake Service Department at (510) 732-1000 and request an RMA number (Return Material Authorization). Items shipped without a valid RMA number will be refused. Make sure you provide us with your complete/correct shipping address, a valid phone number, and a brief description of the problem you are experiencing with the product. In most cases, our technicians might be able to resolve the problem over the phone; Thus, eliminating the need to ship the product.

(F) Shipping Instructions:

Product(s) must be packaged in its original protective box(es) to minimize transport damage and prevent repackaging cost (at the ongoing rates). Shipper claims regarding items damaged in transit must be presented to carrier. Earthquake Sound Corporation reserves the right to refuse improperly packed product. Original bill of sale must accompany product returned to service. We encourage you to include with the package a written description of the problem. Ship product to: Earthquake Sound Corp. 2727 McCone Avenue, Hayward, CA 94545. Ph: (510) 732-1000. You are responsible for the cost of shipping the product to Earthquake Sound Corporation.

(G) Disputes Resolution:

All disputes between clients and Earthquake Sound Corporation resulting from the five (5) year limited warranty policy must be resolved according to the laws & registration of the county of Alameda California.

PRODUCT REGISTRATION

This Earthquake DB subwoofers can be registered by returning the Product Registration card attached to this manual or by visiting http://earthquakesound.com/form_reg.htm . Please also retain the bill of sale, which represents proof of purchase and helps expedite warranty issues.

We recommended that you place or write your serial number here for future reference, if necessary.

SERIAL NUMBER

