


Overview

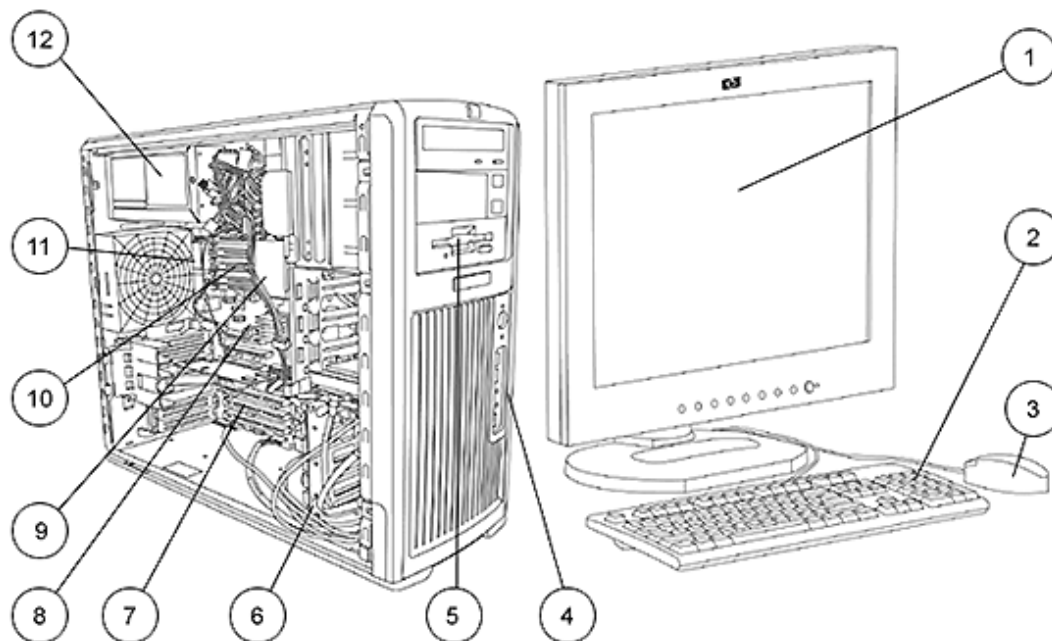

1. Monitor (sold separately)
2. 2004 Standard Keyboard
3. 2-Button Scroll Mouse
4. Front IO: 2 USB 2.0, IEEE-1394 (standard), headphone and microphone
5. 5.25" external bay for optional diskette drive, optical drive or other 5.25"/3.5" device
6. 5 internal 3.5" bays, 3 external 5.25" bays
7. 2 PCI, 3 PCI-X slots
8. 2 PCI Express x16 Graphics Bus
9. Dual AMD Opteron™ processors
10. 8 DIMM slots for DDR memory
11. 6 USB 2.0, 1 standard serial port, 1 IEEE 1394, 2 PS/2, 1 RJ-45, audio in/out, microphone
12. 700 watt power supply

At A Glance

- AMD Opteron processors
- Operating Systems:
 - Microsoft Windows XP Professional
 - Microsoft Windows XP Professional x64 Edition
 - Red Hat Enterprise Linux Workstation 3.0 and 4.0
 - HP Linux Installer Kit (see <http://www.hp.com/workstations/software/linux/> for details)
- Up to 16 GB of DDR memory using integrated CPU memory controllers
- AMD Opteron 200 series processors with 800 MHz or 1GHz HyperTransport™ bus interconnects
- Dual PCI-Express x16 graphics buses
- Support for NVIDIA Scalable Link Interface to link dual graphics cards
- Integrated NVIDIA Gigabit ethernet
- SATA and Ultra 320 SCSI drives
- SATA 3 Gb/s capability is included in the NVIDIA nForce Professional chipset
- AC'97 integrated audio with internal speaker
- Pre-loaded Manageability tools
- Energy Star compliance with energy-saving features
- Protected by HP Services, including a 3-3-3 standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply.

Standard Features - Custom Components

Processor and Speed – One of the following	AMD Opteron Processor with 1 GHz HyperTransport bus, 1 MB L2 cache
	246 (2.0 GHz)
	248 (2.2 GHz)
	250 (2.4 GHz)
	252 (2.6 GHz)
	254 (2.8 GHz)
	Dual-Core AMD Opteron Processor with 1 GHz HyperTransport bus, 1 MB L2 cache per core for a combined total of 2MB.
	270 (2.0 GHz)
275 (2.2 GHz)	

Operating System – One of the following	Microsoft Windows XP Professional with service pack 2
	Microsoft Windows XP Professional x64 Edition (See http://www.hp.com/workstations/pws/windowsxp64/)
	Red Hat Enterprise Linux Workstation 3 Update 5 (64-bit)
	NOTE: The RHEL3 U4 (x86) OS will operate correctly with most options after some manual configuration steps. Please refer to the Release Notes Chapter in http://www.hp.com/support/linux_user_manual .
	HP Installer CD for Red Hat Linux Workstation 3 Box Set (64-bit) See http://www.hp.com/workstations/software/linux/ . Click on "Hardware support matrix" under "Related links" for details.

Transition Tool Kit	HP AMD 64 64-bit Transition Tool Kit
---------------------	--------------------------------------

Power Supply Cord*	Specially rated cord supplied *NOTE: Use only Power Supply Cord supplied with the HP xw9300 workstation. This is a specially rated power cord.
--------------------	--

1st Hard Disk Drive – One of the following	Windows XP	Red Hat Linux
Serial ATA 3Gb/s Hard Drive		
80 GB Serial ATA 3Gb/s Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4
250 GB Serial ATA 3Gb/s Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4
500 GB Serial ATA 3Gb/s Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4
Serial ATA 1.5Gb/s Hard Drives		
80 GB Serial ATA Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4
250 GB Serial ATA Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4
400 GB Serial ATA Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4
74 GB Serial ATA Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4
Ultra320 SCSI Hard Drives		
73 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4
146 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4
300 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4

Standard Features - Custom Components

36 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	WS3, WS4
73 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	WS3, WS4
146 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	WS3, WS4

2nd Hard Disk Drive – One of the following

Serial ATA 3Gb/s Hard Drive

	Windows XP	Red Hat Linux
2nd hard drive, 80 GB Serial ATA 3Gb/s Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4
2nd hard drive, 250 GB Serial ATA 3Gb/s Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4
2nd hard drive, 500 GB Serial ATA 3Gb/s Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4

Serial ATA 1.5Gb/s Hard Drives

2nd hard drive, 80 GB Serial ATA Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4
2nd hard drive, 250 GB Serial ATA Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4
2nd hard drive, 400 GB Serial ATA Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4
2nd hard drive, 74 GB Serial ATA Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4

Ultra320 SCSI Hard Drives

2nd hard drive, 73 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4
2nd hard drive, 146 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4
2nd hard drive, 300 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4
2nd hard drive, 36 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	WS3, WS4
2nd hard drive, 73 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	WS3, WS4
2nd hard drive, 146 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	WS3, WS4

3rd Hard Disk Drive – One of the following

Serial ATA 3Gb/s Hard Drive

	Windows XP	Red Hat Linux
3rd hard drive, 80 GB Serial ATA 3Gb/s Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4
3rd hard drive, 250 GB Serial ATA 3Gb/s Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4
3rd hard drive, 500 GB Serial ATA 3Gb/s Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4

Serial ATA 1.5Gb/s Hard Drives

3rd hard drive, 400 GB Serial ATA Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4
3rd hard drive, 74 GB Serial ATA Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4

Ultra320 SCSI Hard Drives

3rd hard drive, 73 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4
3rd hard drive, 146 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4
3rd hard drive, 300 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4
3rd hard drive, 36 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	WS3, WS4
3rd hard drive, 73 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	WS3, WS4
3rd hard drive, 146 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	WS3, WS4

Standard Features - Custom Components

4th Hard Disk Drive – One of the following		Windows XP	Red Hat Linux
	Serial ATA 3Gb/s Hard Drive		
	4th hard drive, 80 GB Serial ATA 3Gb/s Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4
	4th hard drive, 250 GB Serial ATA 3Gb/s Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4
	4th hard drive, 500 GB Serial ATA 3Gb/s Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4
	Serial ATA 1.5Gb/s Hard Drive		
	4th hard drive, 400 GB Serial ATA Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4
	Ultra320 SCSI Hard Drives		
	4th hard drive, 74 GB Serial ATA Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4
	4th hard drive, 146 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4
	4th hard drive, 300 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4
	4th hard drive, 146 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	WS3, WS4

5th Hard Disk Drive – One of the following		Windows XP	Red Hat Linux*
	Ultra320 SCSI Hard Drives		
	5th hard drive, 146 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4
	5th hard drive, 300 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4
	5th hard drive, 146 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	WS3, WS4

Drive controllers		Windows XP	Red Hat Linux*
	Integrated serial ATA-II controller (4 channels). With RAID 0, RAID 1, RAID 0+1 capability	32-Bit, 64-Bit	WS3, WS4*
	Integrated dual channel Ultra320 SCSI controller	32-Bit, 64-Bit	WS3, WS4*
	Optional Ultra 320 SCSI controller – basic	32-Bit, 64-Bit	WS3, WS4*
	Optional Ultra 320 SCSI controller – advanced, with RAID support and external connector	32-Bit, 64-Bit	WS3, WS4*

NOTE: Hardware Controller supported by Linux except for any of the RAID features. For customers requiring RAID functionality, consider using Software RAID functionality that is controller independent and provided within Red Hat Enterprise Linux.

Factory Integrated RAID		Windows XP	Red Hat Linux*
	RAID 0 Configuration - Striped Array	32-Bit, 64-Bit	WS3, WS4*
	RAID 1 Configuration - Mirrored Array	32-Bit, 64-Bit	WS3, WS4*

NOTE: Requires 2 identical hard drives (speeds, capacity, interface)

NOTE: Hardware Controller supported by Linux except for any of the RAID features. For customers requiring RAID functionality, consider using Software RAID functionality that is controller independent and provided within Red Hat Enterprise Linux.

Standard Features - Custom Components

Memory –		Windows XP	Red Hat Linux
One of the following	1 GB DDR PC3200 (400 MHz) ECC Registered (2 x 512 MB)	32-Bit, 64-Bit	WS3, WS4
	2 GB DDR PC3200 (400 MHz) ECC Registered (4 x 512 MB)	32-Bit, 64-Bit	WS3, WS4
	2 GB DDR PC3200 (400 MHz) ECC Registered (2 x 1 GB)	32-Bit, 64-Bit	WS3, WS4
	4 GB DDR PC3200 (400 MHz) ECC Registered (4 x 1 GB)	32-Bit, 64-Bit	WS3, WS4
	4 GB DDR PC3200 (400 MHz) ECC Registered (8 x 512 MB)	32-Bit, 64-Bit	WS3, WS4
	6 GB DDR PC3200 (400 MHz) ECC Registered (4 x 1 GB + 4 x 512 MB)	32-Bit, 64-Bit	WS3, WS4
	8 GB DDR PC3200 (400 MHz) ECC Registered (8 x 1 GB)	32-Bit, 64-Bit	WS3, WS4
	12 GB DDR PC3200 (400 MHz) ECC Registered (4 x 2 GB+4 x 1 GB)	32-Bit, 64-Bit	WS3, WS4
	16 GB DDR PC3200 (400 MHz) ECC Registered (8 x 2 GB)	32-Bit, 64-Bit	WS3, WS4

Removable Storage		Windows XP	Red Hat Linux
	1.44-MB Diskette Drive	32-Bit, 64-Bit	WS3, WS4
	48X CD-ROM Drive	32-Bit, 64-Bit	WS3, WS4
	48X/32X/48X CD-RW Drive	32-Bit, 64-Bit	WS3, WS4
	16X/40X DVD-ROM drive	32-Bit, 64-Bit	WS3, WS4
	48X/32X/48X/16X Combo CD-RW/DVD-ROM Drive	32-Bit, 64-Bit	WS3, WS4
	16X DVD+/-RW, DL (Dual-Layer) with LightScribe (Lightscribe Software works with Windows only)	32-Bit	WS3, WS4

NOTE: The RHEL3 U4 (x86) OS will operate correctly after some manual configuration steps. Please refer to the Release Notes Chapter in http://www.hp.com/support/linux_user_manual.

2nd Removable Storage		Windows XP	Red Hat Linux
	48X/32X/48X CD-RW Drive	32-Bit, 64-Bit	WS3, WS4
	16X/40X DVD-ROM drive	32-Bit, 64-Bit	WS3, WS4
	48X/32X/48X/16X Combo CD-RW/DVD-ROM Drive	32-Bit, 64-Bit	WS3, WS4
	16X DVD+/-RW, DL (Dual-Layer) with LightScribe (Lightscribe Software works with Windows only)	32-Bit	WS3, WS4

NOTE: The RHEL3 U4 (x86) OS will operate correctly after some manual configuration steps. Please refer to the Release Notes Chapter in http://www.hp.com/support/linux_user_manual.

Keyboard –		Windows XP	Red Hat Linux
One of the following	PS/2 Standard Keyboard	32-Bit, 64-Bit	WS3, WS4
	USB Standard Keyboard	32-Bit, 64-Bit	WS3, WS4

NOTE: The RHEL3 U4 (x86) OS will operate correctly after some manual configuration steps. Please refer to the Release Notes Chapter in http://www.hp.com/support/linux_user_manual.

Standard Features - Custom Components

Mouse –		Windows XP	Red Hat Linux
One of the following	PS/2 2-Button Scroll Mouse	32-Bit, 64-Bit	WS3, WS4
	PS/2 3-Button Mouse	32-Bit, 64-Bit	WS3, WS4
	USB 2-Button Optical Scroll Mouse	32-Bit, 64-Bit	WS3, WS4

Audio		Windows XP	Red Hat Linux
	Integrated AC'97 sound with internal speaker	32-Bit	
	Sound Blaster Audigy 2 ZS PCI	32-Bit	

NIC		Windows XP	Red Hat Linux
	Integrated NVIDIA 10/100/1000 LAN		
	Broadcom 5751 Gigabit LAN (PCI Express)	X	X
	Broadcom 5782 10/100/1000 (PCI)	X	X

Graphics*		Windows XP	Red Hat Linux**
	NVIDIA Quadro NVS 280 PCIe (64 MB, VGA & DVI)	32-Bit, 64-Bit	WS3, WS4
	NVIDIA Quadro NVS 285* PCIe with TurboCache technology (128 MB, VGA & DVI)	32-Bit, 64-Bit	WS3, WS4
	NVIDIA Quadro FX 540 PCIe (128 MB)	32-Bit, 64-Bit	WS3, WS4
	NVIDIA Quadro FX 1400 PCIe (128 MB) – NVIDIA SLI capable	32-Bit, 64-Bit	WS3, WS4
	NVIDIA Quadro FX 3400* PCIe (256 MB) – NVIDIA SLI capable	32-Bit, 64-Bit	WS3, WS4
	NVIDIA Quadro FX 3450* PCIe (256 MB) – NVIDIA SLI capable	32-Bit, 64-Bit	WS3, WS4
	NVIDIA Quadro FX 4500* PCIe (512 MB)	32-Bit, 64-Bit	WS3, WS4
	NVIDIA SLI Graphics Connector ***	32-Bit, 64-Bit	

NOTE: *May use two graphics cards. Must use matching graphics cards and order a second processor.

** To run the accelerated graphics driver on RHEL3 U4, download the latest driver. Please refer to the Release Notes Chapter in http://www.hp.com/support/linux_user_manual.

*** Only supported on NVIDIA Quadro FX 14xx, 34xx and newer series graphics cards.

Miscellaneous		Windows XP	Red Hat Linux
	Hood intrusion sensor	32-Bit, 64-Bit	WS3, WS4
	Trusted Platform Module	32-Bit	

Software		Windows XP	Red Hat Linux
	Symantec Norton AntiVirus Software (optional)	32-Bit	
	HP Performance Tuning Framework	32-Bit	
	Altiris Recovery	32-Bit	
	HP Client Manager Software v6.0	32-Bit	
	Computer Associates® eTrust™ 64-bit Antivirus Software	64-Bit	

Standard Features - Specs

Form factor	Minitower	
Operating System (choice)	Microsoft Windows XP Professional SP2	
	Microsoft Windows XP Professional SP2 x64 Edition	
	OR Red Hat Enterprise Linux Workstation 3 Update 5 (64-bit only)	
	OR HP Installer Kit for Linux (includes drivers for 64-bit OS versions on xw9300, xw8200, xw6200, xw4200)	
Color	Carbonite/Alloy metallic	
System Board Form Factor	E- ATX (12" x 13")	
Processor	Single or dual AMD Opteron 200 series processors with AMD64 Technology & HyperTransport	
CPU Bus Speed Supported	1 GHz HyperTransport	
Standard L2 Cache	1 MB L2 cache per core.	
Chipset	NVIDIA nForce Professional with AMD-8131 HyperTransport PCI-X tunnel	
Memory Expansion Slots	8 DIMMs, 4 slots active for each CPU in the system)	
Memory Type Supported	DDR (ECC registered)	
Memory Speed Supported	DDR Synch DRAM PC3200 (400 MHz) Registered ECC	
Maximum Memory	16 GB (8 DIMMs slots with 2 GB DIMMS, 8 GB per CPU socket)	
Network controller	Integrated NVIDIA nForce Professional 10/100/1000 LAN	
Audio	AC'97	
PCI slots	2 PCI-Express (PCIe) x16 graphics 3 full-height PCI-X slots (one 133 MHz, two 100 MHz slots) 1 full-length PCI slot	
Scalable Link Interface	Yes	
Bays	Total Bays = 8	
Internal Bays	<ul style="list-style-type: none"> Five 3.5 inch bays (4 with acoustic dampening rail assemblies) 	
External Bays	<ul style="list-style-type: none"> Three 5.25 inch bays. Top two support full depth (210 mm maximum) devices. Bottom bay is depth restricted to 169mm (including cables). Bays can be converted to internal 3.5" drive bays using optional bracket. Floppy drive bay using optional bracket. Consumes 1 - 5.25 bay. 	
Parallel Port	0	
Serial Port	1	
Front I/O	2 USB 2.0, Headphone, Microphone, IEEE 1394	
Rear I/O	4 USB 2.0, 1 standard serial port, 1 IEEE 1394, PS/2 keyboard and mouse, 1 RJ-45 to integrated Gigabit LAN, Audio In, Audio Out, Mic In	
USB Keyboard	Optional	
USB Mouse	Optional	
PS/2 Keyboard	1	
PS/2 Mouse	1	
Chassis Dimensions (H x W x D)	17.9 x 8.3 x 20.7 in (45.4 x 21.0 x 52.5 cm)	
System weight	Minimum config – 42 lb (19 kg) Standard config – 45 lb (20 kg) Maximum config – 54 lb (24 kg)	
Shipping weight	Standard config – 54 lb (24 kg)	
Temperature	Operating	40° to 95° F (5° to 35° C)
	Non-operating	-40° to 140° F (-40° to 60° C)
Humidity	Operating	8% to 85%
	Non-operating	8% to 90%

Standard Features - Specs

Maximum Altitude (nonpressurized)	Operating	10,000 ft (3,000 m)
	Non-operating	30,000 ft (9,100 m)
Power Supply	700W wide-ranging, active Power Factor Correction	
Interfaces Supported	4 SATA interface (4 serial-ATA connectors), Ultra320 SCSI interface, 2 EIDE interface (1 EIDE connectors) supported for optical drives. SATA 3 capability is included in the NVIDIA nForce Professional chipset	
Hard Drive Controller (PCI) Supported	Ultra160 or Ultra320, or SATA RAID, or Ultra320 RAID	

Preinstalled Software

HP Performance Tuning Framework *

HP Client Manager Software v6.0*

Altiris Local Recovery*

Alert Standard Format specification*

CD/DVD software dependent on optical drive choices

* [Windows Operating Systems only.](#)

After-Market Options

Processors	Part Number
2nd AMD Opteron processor with AMD64 Technology & HyperTransport	
AMD Opteron 246 processor at 2.0 GHz with 1GHz HT bus & 1 MB of L2 cache	PU942A
AMD Opteron 248 processor at 2.2 GHz with 1GHz HT bus & 1 MB of L2 cache	PU943A
AMD Opteron 250 processor at 2.4 GHz with 1GHz HT bus & 1 MB of L2 cache	PU944A
AMD Opteron 252 processor at 2.6 GHz with 1GHz HT bus & 1 MB of L2 cache	PP661A
AMD Opteron 254 processor at 2.8 GHz with 1GHz HT bus & 1 MB of L2 cache	ED532AA
AMD Opteron 270 processor at 2.0 GHz (2 Core) with 1GHz HT bus & 1 MB of L2 cache per core for a combined total of 2MB.	PY605AA
AMD Opteron 275 processor at 2.2 GHz (2 Core) with 1GHz HT bus & 1 MB of L2 cache per core for a combined total of 2MB.	PY606AA

Graphics*	Windows XP	Red Hat Linux	Part Number
Multi display solutions			
SLI Dual Graphics Connector	X	X	PP654A
NVIDIA Quadro NVS 280 PCIe (64 MB, VGA & DVI)	X	X	DY650A
NVIDIA Quadro FX 540 (128 MB)	X	X	PH791A
NVIDIA Quadro FX 1400 - SLI capable (128 MB)	X	X	PM979A
NVIDIA Quadro FX 3400 - SLI capable (256 MB)	X	X	PB329B
NVIDIA Quadro FX 3450 - SLI capable (256 MB)	X	X	PY640AA
NVIDIA Quadro FX 4500	X	X	EA762AA

NOTE: To run the accelerated graphics driver on RHEL3 U4, download the latest driver. Please refer to the Release Notes Chapter in http://www.hp.com/support/linux_user_manual.

*May use two graphics cards. Must use matching graphics cards and order a second processor.

Hard Drives	Windows XP	Red Hat Linux	Part Number
SATA Hard Drives (8-MB Cache)			
80 GB Serial ATA 3.0Gb/s Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4	PY276AA
80 GB Serial ATA Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4	DE705A
160 GB Serial ATA Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4	DE706A
250 GB Serial ATA 3.0Gb/s Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4	PY278AA
250 GB Serial ATA Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4	DS702A
400 GB Serial ATA Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4	PM254A
500 GB Serial ATA 3.0Gb/s Hard Drive (7,200 rpm)	32-Bit, 64-Bit	WS3, WS4	PV943A
74 GB Serial ATA Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4	DX760A
SATA power cable kit (2 per kit)	32-Bit, 64-Bit	WS3, WS4	DN733A
SCSI Hard Drives			
73 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4	AA613A
146 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4	AA614A
300 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4	DY672A
36 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	WS3, WS4	AA616A
73 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	WS3, WS4	AA617A

After-Market Options

146 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	WS3, WS4	DY671A
Bracket HDD 3.5 to 5.25	32-Bit, 64-Bit	WS3, WS4	AA833A
Cable, 5 port SCSI	32-Bit, 64-Bit	WS3, WS4	AA818A
U320 SCSI Back Panel connector (Uses HDCI, HD68, or mini DB68 connectors)	32-Bit, 64-Bit	WS3, WS4	AA658A

NOTE: The RHEL3 U4 (x86) OS will operate correctly after some manual configuration steps. Please refer to the Release Notes Chapter in http://www.hp.com/support/linux_user_manual.

Controllers	Windows XP	Red Hat Linux	Part Number
SCSI Controllers			
U320 SCSI LSI 20320AR RAID Card - PCI-X (Windows only)	32-Bit		DZ554A
Ultra320 SCSI RAID Adaptec 2120S - PCI (Windows & Linux)	32-Bit	WS3, WS4	AA850A

Storage Devices	Windows XP	Red Hat Linux	Part Number
256 MB USB 2.0 Drive Key II	32-Bit, 64-Bit	WS3, WS4	PH657A
1.44 MB Internal Floppy Drive	32-Bit, 64-Bit	WS3, WS4	DY670A

Input/Output Devices	Windows XP	Red Hat Linux	Part Number
Keyboards			
HP PS/2 Standard Keyboard (Carbonite/Silver)	32-Bit, 64-Bit	WS3, WS4	DT527A
HP USB Standard Keyboard (Carbonite/Silver)	32-Bit, 64-Bit	WS3, WS4	DT528A
Pointing Devices			
HP PS/2 2-Button Scroll Mouse (Carbonite)	32-Bit, 64-Bit	WS3, WS4	DD440B
HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver)	32-Bit, 64-Bit	WS3, WS4	DC172B
HP PS/2 3-Button Mouse	32-Bit, 64-Bit	WS3, WS4	AA778A
HP USB 3-button Optical Mouse	32-Bit, 64-Bit	WS3, WS4	DY651A
HP SpaceBall 5000 (USB)	32-Bit, 64-Bit	WS3, WS4	DV675A
HP SpaceMouse (USB)	32-Bit, 64-Bit	WS3, WS4	DZ203A

Networking	Windows XP	Red Hat Linux	Part Number
NICs			
Broadcom Netxtreme Gigabit PCIe Adapter	32-Bit	WS3, WS4	EA833AA
Intel® Pro/1000MT Gigabit PCI NIC	32-Bit	WS3	DC193A
Broadcom 5782 Netxtreme Gigabit PCI NIC	32-Bit	WS3, WS4	DC194A

After-Market Options

Memory (DIMMs)	Windows XP	Red Hat Linux	Part Number
400 MHz DDR PC3200 ECC Registered DIMMs			
512 MB DDR PC3200 (400 MHz) ECC Registered (1 x 512 MB)	32-Bit, 64-Bit	WS3, WS4	PP657A
1 GB DDR PC3200 (400 MHz) ECC Registered (1 x 1 GB)	32-Bit, 64-Bit	WS3, WS4	PP655A
4GB (2x2GB) DDR400 ECC Registered (Duct)	32-Bit, 64-Bit	WS3, WS4	EA836AA
HP xw9300 2GB DIMM Cooling Duct Kit	32-Bit, 64-Bit	WS3, WS4	EA789AA

Monitors (Supported by all Operating Systems supplied by HP)	TFTs	Part Number
	HP TFT L2335 (23-inch)	P9615W#
	HP TFT L2035 (20.1-inch)	P9614W#
	HP TFT L1955 (19-inch)	PD974A4
	HP TFT L1755 (17-inch)	PL777AA

Optical Drives	Windows XP	Red Hat Linux	Part Number
DVD-ROM Drive			
16X/40X DVD-ROM w/ +R read	32-Bit, 64-Bit	WS3, WS4	AA620B
CD-ROM Drive			
48X Max CD-ROM Drive	32-Bit, 64-Bit	WS3, WS4	DC143B
CD-RW Drive			
48X/32X/48X CD-RW Drive	32-Bit, 64-Bit	WS3, WS4	DE205B
Combo Drive			
48X/32X Combo DVD-ROM/CD-RW Drive	32-Bit, 64-Bit	WS3, WS4	DE206B
DVD+/-RW Drive			
16X DVD+/-RW, DL (Dual-Layer) Win and RHWS3	32-Bit, 64-Bit	WS3, WS4	PH205A
16X DVD+/-RW, DL (Dual-Layer) with LightScribe (LightScribe labeling functionality not supported on Linux)	32-Bit	WS3, WS4*	DZ555B

After-Market Options

Removable Storage	Windows XP	Red Hat Linux	Part Number
256 MB USB 2.0 II drive key		WS3, WS4	PH657A
1.44 MB Internal Floppy Drive	32-Bit		DY670A
HP DAT24i Internal DDS3 tape drive	32-Bit		C1555D
HP 1.44MB Internal floppy drive	32-Bit		DY670A
HP DAT24e External DDS3 tape drive	32-Bit		C1556D
HP DAT40i Internal DDS4 tape drive	32-Bit		C5686B
HP DAT40e External DDS4 tape drive	32-Bit		C5687C
HP DAT72i Internal DAT72 tape drive	32-Bit		Q1522A
HP DAT72e External DAT72 tape drive	32-Bit		Q1523A

The following Removable Drive Enclosure products are available from and supported by 3rd party:

StorCase Rhino Jr. SCSI Removable Disk Enclosure

(For NA, use: HP P/N A466719, for WW, use: vendor P/N S21A107)

StorCase Rhino Jr. SATA 1.5Gb/s Removable Disk Enclosure (For NA, use: HP P/N A466720, for WW, use: vendor P/N S21J111)

Security	Part Number
Chassis clamp lock, universal, no cable	DE817A
Chassis clamp lock, universal, with cable	DE818A

Brackets/Stand	Part Number
Fixed Rack Kit (IT/Broadcast)	AA640A
Depth Adjustable Rails (stationary)	332558-B21
Sliding Shelf kit	234672-B21
Fixed shelf kit	253449-B21
HP xw8200 and xw9300 workstation IT/Broadcast Slide Rack Kit	DY664A

Other Devices	Part Number
IDE Cable Kit (2 nd)	DY660A
Front Card Guide and Fan Kit	DY648A

Operating Systems	Part Number
Red Hat Enterprise Linux Workstation 3 Update 5 64-bit)	EA699AA
Red Hat Enterprise Linux Workstation 3 Update 5 (32-bit)	EA698AA

After-Market Options

Software

	Windows XP	Red Hat Linux	Part Number
HP Remote Graphics V2 LTU for HP WS	32-Bit		PE672A
HP Remote Graphics V3 LTU for HP WS	32-Bit		PY682AA
HP Remote Graphics V2 Receiver LTU	32-Bit		PE674A
HP Remote Graphics V3 Receiver LTU	32-Bit		PY684AA
HP Remote Graphics V2 software media	32-Bit		PE675A
HP Remote Graphics V3 software media	32-Bit		PY685AA
Remote Workstation Sender SW Module	32-Bit		DM497A
Remote Workstation Receiver SW Module	32-Bit		DM498A

Memory

AMD Opteron processor with Direct Connect Architecture


DDR SDRAM ECC REGISTERED MEMORY

This chart does not represent all possible memory configurations. Each AMD Opteron processor has an integrated memory controller that supports ECC Registered 400 MHz (PC3200) DDR memory only. Main memory is directly connected to the processor through the Direct Connect Architecture. There are 8 DIMM slots which provide 6.4 GB/s bandwidth per processor. It can support a maximum of 8 GB of RAM with one processor installed, 16 GB of RAM when both processors are present.

Memory must be added in pairs. Match DIMM pairs by size and type.

In a single processor configuration, install the first DIMM pair in socket set 1 (blue sockets), and the 2nd DIMM pair in socket set 3 (black socket).

In a dual processor configuration, install the first DIMM pair in socket set 1 (blue sockets), the 2nd DIMM pair in socket set 2 (blue sockets) and, if required, the 3rd pair in socket set 3 (black sockets) and the 4th pair in socket set 4 (black sockets).

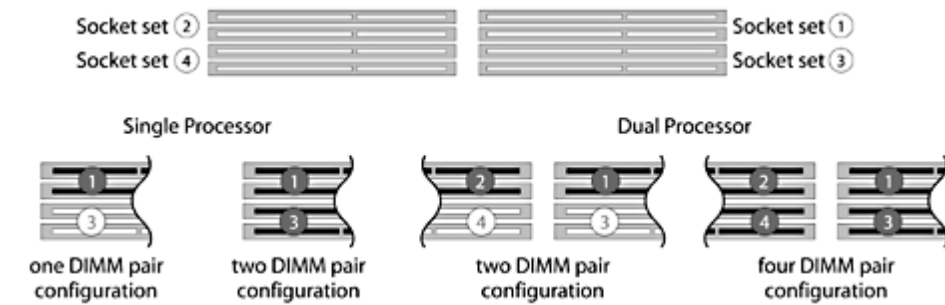

MAXIMUM MEMORY

Supports up to 16 GB of DDR SDRAM, in a configuration of 8 GB per processor (16 GB requires dual CPUs).


POSSIBLE MEMORY CONFIGURATIONS

Not all memory configurations possible are represented below.

DIMM Size	Slot							
	CPU 1				CPU2			
	Socket set 1		Socket set 3		Socket set 2		Socket set 4	
1 GB	512 MB	512 MB						
2 GB	1 GB	1 GB						
2 GB	512 MB	512 MB	512 MB	512 MB				
2 GB	512 MB	512 MB	512 MB	512 MB				
4 GB	1 GB	1 GB	1 GB	1 GB				
2 GB (dual)	512 MB	512 MB			512 MB	512 MB		
4 GB (dual)	1 GB	1 GB			1 GB	1 GB		
4 GB (dual)	512 MB	512 MB	512 MB	512 MB	512 MB	512 MB	512 MB	512 MB
6 GB (dual)	1 GB	1 GB	512 MB	512 MB	1 GB	1 GB	512 MB	512 MB
8 GB (dual)	1 GB	1 GB	1 GB	1 GB	1 GB	1 GB	1 GB	1 GB
12 GB (dual)	2 GB	2 GB	1 GB	1 GB	2 GB	2 GB	1 GB	1 GB
16 GB (dual)	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB

Storage

Tower configuration

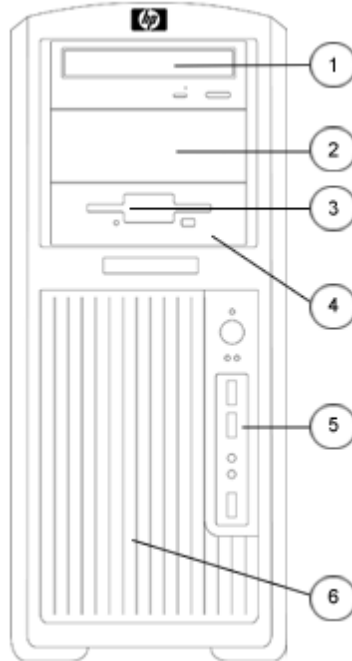

Convertible Minitower

- Optional Diskette Drive
- 5.25" Storage Drive Bays
- 3.5" Storage Drive Bays with acoustic dampening rail assemblies

	Quantity Supported	Position Supported	Controller
Optional Diskette Drive	1	3	Diskette
5.25" Storage Drive Bays	3	1, 2, 3	IDE
3.5" Storage Drive Bays with acoustic dampening rail assemblies	5	4, 5, 6, 7, 8	SATA or SCSI

SCSI and SATA may be mixed in a Windows configuration, only the primary drive may be SATA.

Linux does not support SATA controller or mixing SATA and SCSI drives.

Additional Technical Specifications

System Board	
Architecture	AMD Opteron
Chipset	NVIDIA nForce Professional 2000 with Professional 2200 and 2050
Super I/O Controller	SMSC LPC47B397
System Board Form Factor	E-ATX (12" x 13")
Processor Socket	Dual 940 Pin ZIF Sockets
DIMM Connectors (DDR1, 2.5V)	8 DDR Memory Slots
PCIe Connectors	Dual x16 PCIe Slots
Integrated Graphics	None
PCI Connectors (5.0V)	1 full length 33 MHz 32-bit
PCI-X Connectors	2 full length 100 MHz 64-bit 1 full length 133 MHz 64-bit
PCI card guide	Optional, tool-free support for all full-length cards with PCI extender
USB Ports	2 front, 4 rear
1394 Ports	1 front, 1 rear
Floppy	Yes
PS/2 Keyboard & Mouse	Yes
Serial Port	Yes
Parallel Port	None
Flash ROM	Yes
TPCM Support	Yes
AC97 integrated audio	Yes
CD ROM IN (Audio)	Yes
AUX IN (Audio)	Yes
Clear CMOS Button	Yes
CPU Fan Header	2 (One for each CPU)
Chassis Fan Header	Yes
PCI Cage Fan Header	Yes
Chassis Speaker Header	Yes
CMOS Battery Holder – Lithium	Yes
Hood Lock Header	None
Hood Sensor Header	None
Multibay Header	None
Hard drive acoustic dampening rails	Standard in 4 internal 3.5" bays, tool-free
Integrated SATA RAID	<ul style="list-style-type: none"> • RAID 0, RAID 1, RAID 0+1 • Supports one RAID array on 4 ports • Creation of 4 drive HDD array • RAID 0 Configuration – Striped Array • RAID 1 Configuration – Mirrored Array
Integrated SCSI	LSI 53C1030 SCSI Controller with optional external connector
SCSI Connectors	2 (One Internal, One External Optional)

Additional Technical Specifications

Integrated LAN	NVIDIA 10/100/1000 LAN Controller (PCIe)
Wake-On-Lan®	Yes
ASF 1.0 (Alert Standard Format)	No
Power Supply Connectors	Yes, 24-pin Main Power, 8-pin CPU, 6-pin Auxiliary
Power Switch, Power LED & Hard Drive LED Header	Yes
S3 Support	Yes
Password Clear Header	Yes
Riser Connector	None
HDD activity LED Header	Yes

Technical Specifications

Cooling	
Cooling Solutions Supported	Yes
Power Supply Fan	3.62 x 0.98 in (92 x 25 mm)
Processor Fan-Heatsink	2.76 x 0.59 in (70 x 15 mm)
Chassis Fan (front)	One 3.62 x 0.98 in (92 x 25 mm) (optional)
Chassis Fan (rear)	One 4.72 x 1.1 in (120 mm x 28 mm) (standard)
Internal Speaker	Standard

Power Supply	
9 outputs	<ul style="list-style-type: none"> +3.3V—used with PCI, PCI-X, PCIe, CK8-04, IO4, AMD8131, LS1030, IEEE 1394, Audio, Super I/O, on-board logic +5V—used with storage (disk, optical, diskette), PCI, PCI-X, PCIe, IEEE 1394, CK8-04, IO4, USB, input to on-board regulators (1.2V, 1.5V, 1.8V, and 2.5V), SCSI hard drives, and on-board logic +12V-A—used with PCI, PCI-X, PCIe, IEEE 1394, system fans +12V-B—used with storage (disk, optical, floppy) +12V-C—used with PCI Express x16 auxiliary connectors +12VCPU0—input to onboard regulator that supplies power for CPU0, Mem0 and respective fan +12VCPU1—input to onboard regulator that supplies power for CPU1, Mem1 and respective fan -12V—used by PCI, PCI-X 5VSB—used for sleep circuitry
Full Ranging Input	Yes
Active Power Factor Correction (APFC) (Input Current is nearly 1/2 a non-APFC PS)	Yes
Passive Power Factor Correction (PFC)	No
Operating Voltage Range	90 – 264 VAC/118 VAC
Rated Voltage Range	100 – 240 VAC
Rated Line Frequency	50-60 Hz/400Hz
Operating Line Frequency Range	47 – 66 Hz/393 – 407Hz
Rated Input Current	11.9A/9.98A
Maximum Rated Power	700 W
Heat Dissipation	Typical 1206.2 btu/hr Maximum 3656.78 btu/hr
PS Size (wide x high x deep)	3.86 x 6.3 x 7.87 in (98 x 160 x 200 mm)
Energy Star Compliant	Yes
Surge Tolerant Full Ranging Power Supply	Withstands power surges up to 2000V

ROM Features	Description
Instantly Available PC	Allows for very low power consumption with quick resume time
ROM Based F10 Setup and diagnostics	Review and customize BIOS settings
Remote System Installation via F12 (PXE) (Remote Boot from Server)	Allows a new or existing system to boot over the network and download software, including the operating system

Technical Specifications

System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS
ROM revision levels	<ul style="list-style-type: none"> Identifies system ROM revision levels and reports in ROM-based F10 setup Version is stored in an industry standard memory location (SMBIOS) so that management SW applications can use and report this information
System board revision level	<ul style="list-style-type: none"> Allows management SW to read the revision level of the system board Revision level is digitally encoded into the hardware and cannot be modified
Auto Setup when New Hardware Installed	System automatically detects addition of new hardware
Serial, USB, Audio, Network, Enable/Disable Port Control	Enable or disables serial, USB, audio, and network ports
Removable Media Write/Boot Control	Prevents ability to boot from removable media on supported devices (and can disable writes to media)
Power-On Password	Prevents an unauthorized person from booting up the computer
Setup Password	Prevents an unauthorized person from changing the system configuration
Replicated Setup	Saves BIOS settings to diskette or USB disk-on-key in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering ROM-based F10 setup
Memory Change Alert (Requires HP Client Manager Software)	Alerts management console if memory is removed or changed
Thermal Alert (Requires HP Client Manager Software)	<p>Monitors the temperature state within the chassis. Three modes:</p> <ul style="list-style-type: none"> NORMAL – normal temperature ranges ALERTED – excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown SHUTDOWN – excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs
Master Boot Record Security	Detects changes to MBR and optional restoration, useful in protecting from viruses
Remote ROM Flash	Provides secure, fail-safe ROM image management from a central network console
Remote Wakeup/shutdown	<ul style="list-style-type: none"> System administrators can power on, restart, and power off a client computer from a remote location. Enables cost-effective power consumption when the administrator needs to distribute software, perform security management, or update the ROM
ACPI (Advanced Configuration and Power Interface)	<ul style="list-style-type: none"> Allows the system to wake from a low power mode Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system <p>Supports ACPI 2.0 for full compatibility with 64-bit operating systems</p>
Keyboard-less Operation	The system can be operated without a keyboard
SMBIOS	System Management BIOS 2.3.5, previously known as DMI BIOS, for system management information
Localized ROM Setup	Common BIOS image supports configuration (Setup) in 11 languages, with local keyboard mappings
Asset tag	Allows user or MIS to set unique tag string in ROM
Ownership tag	Allows user or MIS to set unique tag string in ROM
Memory Scrubbing	Allows memory controller to transparently correct transient ECC errors in the background
Memory Remapping	Allows system memory lost to PCI devices to be reclaimed above 4 GB, for use with operating systems that support more than 4 GB (Windows XP 64-bit edition, Linux)
Per-slot control	Allows individual slot configuration (option ROM., latency)
Adaptive cooling	Fan control parameters are set according to detected hardware configuration for optimal acoustics
Pre-boot diagnostics	Early (pre-video) critical errors are reported via beeps and blinks on the power LED

Technical Specifications

Other Deployment & Management Features	
HP Client Management Solutions	<p>HP Client Management Solutions help simplify management of Workstations and significantly reduce total ownership costs. These solutions share a common design and are highly integrated due to the extensive work between HP and its partner Altiris.</p> <p>HP Client Manager Software is included free with all HP business PCs and Workstations. It enables central tracking, monitoring, and management of the hardware aspects of HP client systems:</p> <ul style="list-style-type: none"> • Get valuable hardware information such as CPU, memory, video, and security settings • Monitor system health to fix problems before they occur • Install drivers and BIOS updates without visiting each PC • Remotely configure BIOS and security settings • Automate processes to quickly resolve hardware problems <p>Additional Altiris solutions (fee-based) are available to address Workstation management challenges through the entire IT lifecycle including:</p> <ul style="list-style-type: none"> • Inventory assessment • Software license compliance • Personality migration • Software image deployment • Software distribution • Asset management • Client backup and recovery • Problem resolution <p>Visit http://www.hp.com/go/easydeploy for more information, to download HP Client Manager Software, and to evaluate the Altiris solutions.</p>
System Software Manager (free)	A free utility that detects and updates BIOS, device drivers, and management agent versions on your networked PCs and workstations
Altiris Local Recovery	Provides data and system file protection for HP business PCs to enable fast recovery of information that is accidentally deleted or if the system becomes corrupted. Designed for disconnected or seldom-connected users, Local Recovery protects your HP computer's data and system state by taking scheduled snapshots, which are then stored in a protected area on the local hard disk. System backup and disaster recovery is now simple and fast for all users, regardless of connectivity
Replicated Setup	Saves BIOS settings to diskette or USB disk-on-key in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering ROM-based F10 setup
Software Restore CD	Restores computer to its original factory shipping image
Asset Tag	<ul style="list-style-type: none"> • Repository for storing company-specific property asset numbers for easy tracking • Initially set equal to the system serial number • Stored in a protected section of non-volatile memory that can be accessed and modified with the F10 Setup program
DIMM Serial Presence Detect	Detects whether or not memory DIMMs are present and their type
Hard drive serial number, model, and manufacturer	Hard drive manufacturer, model, and serial number is stored in the hard drive firmware and reported in ROM-based F10 setup
Memory Change Alert (Requires HP Client Manager Software)	Alerts management console if memory is removed or changed
Ownership Tag	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen

Technical Specifications

Ultra ATA Integrity Monitoring (CRC Checking)	<p>A feature of SATA and SCSI, Cyclic Redundancy Checking provides data transfer verification and proactive notification of hard drive data transmission problems with recommendations for enhancing system performance. It detects all the following errors' types:</p> <ul style="list-style-type: none"> • single bit errors • double bit errors • an odd number of errors • error bursts up to 32-bits long
Drive Self Tests (DPS)	<ul style="list-style-type: none"> • Drive Protection System (Adaptec and LSI SCSI controllers do not offer DPS) • A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user. • Running independently of the operating system, it can be accessed through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced. <p>The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures. DPS Access through F10 Setup during Boot (F10 diagnostic access not available with SCSI drives)</p>
SMART Technology (Self-Monitoring, Analysis and Reporting Technology)	<p>Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted. Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count.</p> <p>By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure.</p> <p>SMART I – Drive Failure Prediction SMART II – Off-Line Data Collection SMART III – Off-Line Read Scanning with Defect Reallocation</p>

Security Features	
Access panel key lock (standard)	Prevents removal of the access panel and all internal components including optical and floppy drives
Padlock (optional)	Prevents entire system theft and discourages access panel removal. 7mm diameter padlock loop at rear of system.
Kensington Cable Lock (optional)	Prevents entire system theft only. 3mm x 7mm slot at rear of system.
Universal chassis clamp lock (optional)	The version without a cable discourages access panel removal and prevents theft of IO devices. The version with a cable additionally prevents entire system theft and allows multiple systems to be secured with a single cable.

Serviceability Features of System	
Access panel	Tool-less, one-handed
Optical drives	Tool-less
Floppy drive	Tool-less
Hard drives	Tool-less
Expansion cards	Tool-less
Green user touch points	Yes, on tool-free internal chassis mechanisms
Color-coordinated cables and connectors	Yes
Memory	Tool-less, can be upgraded without removing any internal components
CPUs	Tool-less, can be upgraded without removing any internal components
Chassis fan removal	Tool-less

Technical Specifications

Power supply diagnostic LED	Yes, dual function: AC OK & power OK
Power Button	Yes, ACPI multi-function
Power LED	Yes, dual color LED indicates normal operation and faults.
Hard drive activity LED	Yes
Internal speaker	Yes, used for pre-boot diagnostic beep codes
Dual Color Power and HD LED on Front of Computer (Indicates Normal Operations and Fault Conditions)	green – normal red – fault
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS.
Configuration Record SW	Yes
Over-Temp Warning on Screen (Requires IM Agents)	Yes
OS CD (Restore OS CD)	Restores computer to its original factory shipping image
Restore CD	Restores the computer to its original factory shipping image
Flash ROM	Yes
3.3V Aux Power LED on System PCA	Yes
Dual Function 5V Aux Power LED (ON)/PS_ON LED (OFF) on System PCA	Yes
Clear Password Jumper	Yes
Clear CMOS Button	Yes
CMOS Battery Holder for easy Replacement	Yes
Processor ZIF Socket for easy Upgrade	Yes
DIMM Connectors for easy Upgrade	Yes
NIC LEDs (integrated) (Green & Amber)	Used to determine NIC status
ASF 1.0 support (Alert Standard Format)	Industry-standard specification for network alerting in operating system-absent environments
Dual function front power switch	Causes a fail-safe power off when held for 4 seconds

Technical Specifications

Service and Support	<p>On-site Warranty and Service (Note 1): This three-year, limited warranty and service offering delivers three years of on-site, next business-day (Note 2) service for parts and labor and includes free telephone support (Note 3) 24 x 7. Global coverage (Note 2) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering.</p>
	<p>NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply.</p>
	<p>NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.</p>
	<p>NOTE 3: Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.</p>

Technical Specifications - Audio

AC97 Integrated ADI 1981B Audio	Type	Integrated
	AC '97 Stereo Codec	Yes
	FM Synthesis Support	Yes – Yamaha XG Lite
	OPL3 FM Synthesis Support	Yes
	Sound Blaster Compatibility	Yes
	SPDIF 6-channel pass-through	Yes
	Audio Jacks	Microphone-In (20-K ohm Input Impedance); rear stereo and front analog microphone ports Line-In (12-K ohm Input Impedance) Line-Out * (less than 800 ohms Output Impedance, expects at least a 10-K ohm load) Headphone-Out (2.5 Ohms Output Impedance, expects at least a 32 ohm load)
	NOTE: *Internal Speaker Amplifier is for Internal Speaker only. External Speakers need to be powered externally.	
	Sampling	7 kHz – 48 kHz
	Wavetable Syntheses (software)	Yes – GM and FM Midi Support, Direct Music and Down Loadable Soundset (4 Meg DLS Level 1 and 2 Support)
3D Positional Sound	No	
Digital Audio	Yes	
Analog Audio	Yes	
Number of Channels on Line-Out (mono/stereo)	Stereo (Left & Right channels)	
Internal Audio Speaker Power Rating	3W	
Internal Speaker	Yes	
Hardware Equalizer for Internal Speaker	Fixed 7 Band ParametricEQ	
External Speaker Jack (Line-Out)	Yes	

Technical Specifications - Communications

Integrated NVIDIA LAN-on-Motherboard	Connector	RJ-45	
	Controller	NVIDIA Gigabit Controller with Marvell PHY	
	Data rates supported	10/100/1000 Mbps	
	Compliance	IEEE 802.3-2000	
	Bus architecture	Integrated plus RGMII interface	
	Data transfer mode	DMA	
	Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union	
	Boot ROM support	Yes	
	Network transfer rate	10BASE-T (half-duplex)	10 Mbps
		10BASE-T (full-duplex)	20 Mbps
100BASE-TX (half-duplex)		100 Mbps	
100BASE-TX (full-duplex)		200 Mbps	
1000BASE-T		1000 Mbps	
Operating system driver support	Microsoft Windows NT® 4.0, Microsoft Windows 98, Microsoft Windows 2000, Microsoft Windows XP, Linux 2.2, Linux 2.4		
Management capabilities	WOL, PXE and NVIDA control console		

Broadcom NetXtreme Gigabit Ethernet Adapter (model EA833AA)	Connector	RJ-45	
	Controller	Broadcom 5751 PCI-Express LAN Controller	
	Memory	Integrated 96Kb frame buffer memory	
	Data rates supported	10/100/1000 Mbps	
	Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control	
	Bus architecture	PCI-E	
	Data path width	Single channel, PCI-E	
	Data transfer mode	Bus-master DMA	
	Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union	
	Power requirement	3.1 watts @ +3.3V AUX supply with 5V tolerance	
	Boot ROM support	Yes	
	Network transfer rate	10BASE-T (half-duplex)	10 Mbps
		10BASE-T (full-duplex)	20 Mbps
		100BASE-TX (half-duplex)	100 Mbps
		100BASE-TX (full-duplex)	200 Mbps
		1000BASE-T (full-duplex)	2000 Mbps
Environmental	Operating temperature	32° to 131° F (0° to 55° C)	
	Operating humidity	85% at 131° F (55° C)	
Dimensions	4.4 x 2.2 x 0.08 in (11.2 x 5.5 x 2 cm)		
Operating system driver support	Microsoft® Windows® XP, Linux 2.2, Linux 2.4, and Red Hat Linux 7.2		
Management capabilities	ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Broadcom mgmt utility		
Alerting	N/A		

Technical Specifications - Communications

Kit contents Broadcom 5751, CD, Broadcom NetXtreme Gigabit Ethernet PCI-E Adapter, drivers, quick install guide, product warranty statement

Intel Pro 1000 MT NIC	<p>Connector RJ-45</p> <p>Controller Intel 82540EM Gigabit Controller</p> <p>Memory Integrated 96Kb frame buffer memory</p> <p>Data rates supported 10/100/1000 Mbps</p> <p>Compliance IEEE 802.1A, 802.1P, 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control</p> <p>Bus architecture PCI 2.2</p> <p>Data path width 32-bit, 33/66 MHz bus interface</p> <p>Data transfer mode Bus-master DMA</p> <p>Hardware certifications FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union</p> <p>Power requirement 1.48 watts @ +3.3V AUX supply with 5V tolerance</p> <p>Boot ROM support Yes</p> <p>Network transfer rate 10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T, 1000 Mbps</p> <p>Environmental Operating temperature 32° to 131° F (0° to 55° C) Operating humidity 85% at 131° F (55° C)</p> <p>Dimensions 6.4 x 4.8 x 0.8 in (16.3 x 12.1 x 1.9 cm)</p> <p>Operating system driver support Microsoft Windows NT 4.0, Microsoft Windows 98, Microsoft 2000, Microsoft XP, Linux 2.2, Linux 2.4</p> <p>Management capabilities ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Intel PROset II utility</p> <p>Kit contents The Intel Pro 1000 MT NIC, CD containing Intel PROset II NIC drivers, quick install guide, product warranty statement</p>
Broadcom 5782 Nextreme Gigabit PCI NIC	<p>Connector RJ-45</p> <p>Controller Broadcom 5782 PCI LAN Controller</p> <p>Memory Integrated 96Kb frame buffer memory</p> <p>Data rates supported 10/100/1000 Mbps</p> <p>Compliance IEEE 802.1A, 802.1P, 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control</p> <p>Bus architecture PCI 2.2</p> <p>Data path width 32-bit, 33/66 MHz bus interface</p> <p>Data transfer mode Bus-master DMA</p> <p>Hardware certifications FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union</p> <p>Power requirement 1.48 watts @ +3.3V AUX supply with 5V tolerance</p> <p>Boot ROM support Yes</p>

Technical Specifications - Communications

Network transfer rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T, 1000 Mbps
Environmental	Operating temperature 32° to 131° F (0° to 55° C) Operating humidity 85% at 131° F (55° C)
Dimensions	4.7 x 2.0 x 0.08 in (12 x 5 x 1.9 cm)
Operating system driver support	Microsoft Windows NT 4.0, Microsoft Windows 98, Microsoft 2000, Microsoft XP, Linux2.2, Linux 2.4
Management capabilities	ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Broadcom mgmt utility
Alerting	ASF 1.0
Kit contents	Broadcom 5782, CD, Broadcom NetXtreme Gigabit Ethernet for HP, drivers, quick install guide, product warranty statement

Technical Specifications - Controllers

LSI Logic LSI53C1030 Ultra320 SCSI Onboard Controller	Bus architecture	PCI-X
	Number of supported devices	5 internal SCSI devices
	Interface protocol	64 bit, 100 MHz PCI-X
	Host bus transfer rate	Up to 800 MB/s
	SCSI data transfer rate	Up to 640 MB/s
	SCSI Bus	Wide Ultra320, Low Voltage Differential, and Ultra Wide Single-Ended
	Internal connector	68-pin HD
	External connector	68 pin VHDCI
	Total connectors	2
	Plug and Play Support	No
	Dimensions (H x L)	NA
	Operating system support	Microsoft Windows XP
	Kit contents	NA

LSI Logic LSI20320 Ultra320 SCSI single channel host adapter	Bus architecture	PCI-X (backward compatible with PCI)
	Number of supported devices	Up to 15 SCSI devices
	Interface protocol	64 bit, 133 MHz PCI-X
	Host bus transfer rate	Up to 1 MB/s
	SCSI data transfer rate	Up to 320 MB/s per channel
	SCSI Bus	Wide Ultra320, Low Voltage Differential, and Ultra Wide Single-Ended
	Internal connector	68-pin HD
	External connector	68 pin VHDCI
	Total connectors	2
	Plug and Play Support	No
	Dimensions (H x L)	6.6 x 2.5 in (16.9 x 6.4 cm)
	Approvals	CE, VCCI, Canada, C-Tick, FCC class B, UL 94VO
	Operating system support	Microsoft Windows XP
Kit contents	LSI Logic LSI20320-R Ultra320 Single Channel controller, driver CD, LED cables, user documentation and warranty card.	

Technical Specifications - Controllers

Adaptec SCSI RAID 2120S Card

Dimensions (H x D)	2.5 x 6.6 in (6.4 x 16.8 cm) Low profile card
RAID level	0, 1, 10, 5, 50, JBOD
Data Transfer Rate	Up to 320 MB/s
Cache Memory	64 MB (onboard)
Device Support	Up to 15 SCSI devices
Bus Type	64-bit/66 MHz PCI (Also support 32-bit/33 MHz PCI)
Internal Connectors	One 68-pin high-density
External Connectors	One 68-pin VHDCI
System Requirements	Workstation with available PCI slot
Operating Temperature	32° to 131° F (0° to 55° C)
Power Requirements	4 amps @ +5V
Operating System Support	Windows 2000 Professional, Windows XP Professional, Red Hat Linux, and SuSE Linux
Other	Optimized disk utilization Online RAID Level Migration Online capacity expansion Immediate RAID availability (background initialization) S.M.A.R.T. support

Technical Specifications - Hard Drives

Serial ATA 3Gb/s Hard Drives	80 GB	Capacity	80,026,361,856 bytes	
		Height	1 in (2.54 cm) or less	
		Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA (3.0 Gb/S)	
		Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s	
		Buffer	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2 ms
			Average	9.3 ms
			Full-Stroke	21 ms
		Rotational Speed	7,200 rpm	
		Logical Blocks	156,301,488	
		Operating Temperature	41° to 131° F (5° to 55° C)	
			250 GB	Capacity
Height	1 in (2.54 cm) or less			
Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)			
Interface	Serial ATA (3.0 Gb/S)			
Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s			
Buffer	8 MB			
Seek Time (typical reads, includes controller overhead, including settling)	Single Track			1 ms
	Average			8.5 ms
	Full-Stroke			18 ms
Rotational Speed	7,200 rpm			
Logical Blocks	488,397,168			
Operating Temperature	41° to 131° F (5° to 55° C)			

Technical Specifications - Hard Drives

500 GB	Capacity	500,107,862,016 bytes	
	Height	1 in (2.54 cm) or less	
	Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
	Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
	Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s	
	Buffer	16 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	1.3 ms
		Average	20 ms
		Full-Stroke	30 ms
	Rotational Speed	7,200 rpm	
	Logical Blocks	976,773,168	
	Operating Temperature	41° to 131° F (5° to 55° C)	

Serial ATA 1.5Gb/s Hard Drives (7200 rpm) 80 GB

	Capacity	80,026,361,856 bytes	
	Height	1 in (2.6 cm)	
	Width	Media diameter: 3.5 in (8.9.x cm) Physical size: 4 in (10.2 cm)	
	Interface	Serial ATA	
	Synchronous Transfer Rate (Maximum)	150 MB/s	
	Buffer	8 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	1.0 ms
		Average	8.5 ms
		Full-Stroke	18 ms
	Rotational Speed	7,200 rpm	
	Logical Blocks	156,301,488	
	Operating Temperature	32° to 140° F (0° to 60° C)	

Technical Specifications - Hard Drives

160 GB	Capacity	160,041,885,696 bytes	
	Height	1 in (2.6 cm)	
	Width	Media diameter: 3.5 in (8.9.x cm) Physical size: 4 in (10.2 cm)	
	Interface	Serial ATA	
	Synchronous Transfer Rate (Maximum)	150 MB/s	
	Buffer	8 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track 1.0 ms Average 8.5 ms Full-Stroke 18 ms	
	Rotational Speed	7,200 rpm	
	Logical Blocks	312,581,808	
	Operating Temperature	32° to 140° F (0° to 60° C)	
	250 GB	Capacity	250,059,350,016 bytes
		Height	1 in (2.6 cm)
		Width	Media diameter: 3.5 in (8.9 cm) Physical size: 4 in (10.2 cm)
Interface		Serial ATA	
Synchronous Transfer Rate (Maximum)		150 MB/s	
Buffer		8 MB	
Seek Time (typical reads, includes controller overhead, including settling)		Single Track 0.8 ms Average <9.0 ms Full-Stroke ≤17 ms	
Rotational Speed		7,200 rpm	
Logical Blocks		488,397,168	
Operating Temperature		41° to 131°F (5° to 55°C)	

Technical Specifications - Hard Drives

400 GB	Capacity	400,088,457,216 bytes		
	Height	1 in (2.6 cm)		
	Width	Media diameter: 3.5 in (8.9.x cm) Physical size: 4 in (10.2 cm)		
	Interface	Serial ATA		
	Synchronous Transfer Rate (Maximum)	150 MB/s		
	Buffer	8 MB		
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.8 ms	
		Average	<11.0 ms	
		Full-Stroke	≤15 ms	
	Rotational Speed	7,200 rpm		
	Logical Blocks	781,422,768		
	Operating Temperature	41° to 131°F (5° to 55°C)		

Serial ATA 1.5Gb/s Hard Drives (10,000 rpm) 74 GB

	Capacity	74,355,769,344 bytes		
	Height	1.0 in (2.54 mm)		
	Width	Media diameter: 3.3 in (84 mm) Physical size: 4 in (10.2 cm)		
	Interface	Serial ATA		
	Synchronous Transfer Rate (Maximum)	150 MB/s		
	Buffer	8 MB		
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 ms	
		Average	4.5 ms	
		Full-Stroke	10.2 ms	
	Rotational Speed	10,000 rpm		
	Logical Blocks	145,226,112		
	Operating Temperature	41° to 140° F (5 to 60° C)		

Technical Specifications - Hard Drives

Ultra320 SCSI Hard Drives (10,000 rpm)	73 GB	Capacity	73,407,865,856 bytes		
		Height	1.0 in (2.54 cm)		
		Width	3.5 in (8.9 cm)		
		Interface	68 pin LVD SCSI		
		Synchronous Transfer Rate (Maximum)	320 MB/s		
		Buffer	8 Mbytes		
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 msec	
			Average	<4.5 msec	
			Full-Stroke	<11.0 msec	
		Rotational Speed	10,000 rpm		
		Logical Blocks	143,374,738		
		Operating Temperature	40° to 130° F (5° to 55° C)		
			146-GB	Capacity	146,815,737,856 bytes
Height	1.0 in (2.54 cm)				
Width	3.5 in (8.9 cm)				
Interface	68 pin LVD SCSI				
Synchronous Transfer Rate (Maximum)	320 MB/s				
Buffer	8 Mbytes				
Seek Time (typical reads, includes controller overhead, including settling)	Single Track			0.3 msec	
	Average			<4.5 msec	
	Full-Stroke			<11.0 msec	
Rotational Speed	10,000 rpm				
Logical Blocks	286,749,488				
Operating Temperature	40° to 130° F (5° to 55° C)				
	300 GB			Capacity	300,000,000,000 bytes
		Height	1.0 in (2.54 cm)		
		Width	3.5 in (8.9 cm)		
		Interface	68 pin LVD SCSI		
		Synchronous Transfer Rate (Maximum)	320 MB/s		
		Buffer	8 Mbytes		
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 msec	
			Average	<4.5 msec	
			Full-Stroke	<11.0 msec	
		Rotational Speed	10,000 rpm		
		Logical Blocks	585,937,500		
		Operating Temperature	40° to 130° F (5° to 55° C)		

Technical Specifications - Hard Drives

Ultra320 SCSI Hard Drives (15,000 rpm)	36 GB	Capacity	36,420,075,520 bytes		
		Height	1.0 in (2.54 cm)		
		Width	3.5 in (8.9 cm)		
		Interface	68 pin LVD SCSI		
		Synchronous Transfer Rate (Maximum)	320 MB/s		
		Buffer	8 Mbytes		
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 msec	
			Average	<4.5 msec	
			Full-Stroke	<11.0 msec	
		Rotational Speed	15,000 rpm		
		Logical Blocks	71,132,960		
		Operating Temperature	40° to 130°F (5° to 55°C)		
			73 GB	Capacity	73,407,865,856 bytes
Height	1.0 in (2.54 cm)				
Width	3.5 in (8.9 cm)				
Interface	68 pin LVD SCSI				
Synchronous Transfer Rate (Maximum)	320 MB/s				
Buffer	8 Mbytes				
Seek Time (typical reads, includes controller overhead, including settling)	Single Track			0.3 msec	
	Average			<4.5 msec	
	Full-Stroke			<11.0 msec	
Rotational Speed	15,000 rpm				
Logical Blocks	143,374,738				
Operating Temperature	40° to 130°F (5° to 55° C)				
	146 GB			Capacity	146,815,737,856 bytes
		Height	1.0 in (2.5 cm)		
		Width	3.5 in (8.9 cm)		
		Interface	68 pin LVD SCSI		
		Synchronous Transfer Rate (Maximum)	320 MB/s		
		Buffer	8 Mbytes		
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 msec	
			Average	<4.5 msec	
			Full-Stroke	<11.0 msec	
		Rotational Speed	15,000 rpm		
		Logical Blocks	143,374,738		
		Operating Temperature	40° to 130°F (5° to 55°C)		

Technical Specifications - Removable Storage

HP Drive Key II	Dimensions (HxWxD)	0.32 x 0.63 x 2.67 in (0.8 x 1.6 x 6.8 cm)	
	Storage Capacity	256 MB	
	Weight	0.05 lb (0.02 kg)	
	Transfer Rates	Read Capable of 6.0 MB/s sustained read speed in USB 2.0 system Write Capable of 6.0 MB/s sustained write speed in USB 2.0 system	
	Operating Temperature	41° to 122° F (5° to 50° C)	
	Non-operating Temperature	-22° to 140° F (-30° to 60° C)	
	Operating System Support	Microsoft Windows 2000, Windows XP Professional, Windows XP Home. No driver is required for this device. Native support is provided by the operating system.	
	Option Kit Contents	HP Drive Key II, documentation	

Technical Specifications - Input/Output Devices

Standard Keyboard (PS/2 OR USB '04)	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
	Electrical	Weight	2 lb (0.9 kg) minimum
		Operating voltage	+ 5VDC \pm 5%
	Mechanical	Power consumption	50-mA maximum (with three LEDs ON)
		ESD	CE level 4, 15-kV air discharge
	Environmental	EMI - RFI	Conforms to FCC rules for a Class B computing device
		Microsoft PC 99 - 2001	Functionally compliant
		Languages	38 available
		Keycaps	Low-profile design
		Switch actuation	55-g nominal peak force with tactile feedback
		Switch life	20 million keystrokes (using Hasco modified tester)
		Switch type	Contamination-resistant switch membrane
		Key-leveling mechanisms	For all double-wide and greater-length keys
		Cable length	6 ft (1.8 m)
		Microsoft PC 99 - 2001	Mechanically compliant
	Operating system support	Acoustics	43-dBA maximum sound pressure level
		Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, six surfaces
		Non-operating shock	80 g, six surfaces
		Operating vibration	2-g peak acceleration
		Non-operating vibration	4-g peak acceleration
		Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence	
	Approvals	Windows 2000 and Windows XP	
	Ergonomic compliance	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
	Kit contents	ANSI HFS 100, ISO 9241-4, and TUVGS	
		Keyboard, keyboard software media, installation guide, warranty card, safety and comfort	

Technical Specifications - Input/Output Devices

2-Button Scroll Mouse (PS/2)	Scroll Wheel	8 mm		
	Maximum Rotation Speed	30 mm/s		
	Switch Type	Light force micro-switch		
	Switch Life	1 million operations		
	Mechanical Life	Minimum 200,000 revolutions		
	Environmental	Operating Temperature	50° to 122° F (10° to 50° C)	
		Non-operating Temperature	-22° to 140° F (-30° to 60° C)	
		Operating Humidity	10% to 90% (non condensing at ambient)	
		Non-operating Humidity	20% to 80% (non condensing at ambient)	
		Operating Shock	40 g, 6 surfaces	
		Non-operating Shock	80 g, 6 surfaces	
		Operating Vibration	2 g peak acceleration	
		Non-operating Vibration	4 g peak acceleration	
		Mechanical	Resolution	400 ± 20% DPI
			Tracking Speed	10 in/s maximum
			Acceleration	100 in/s
			Switch Actuation	85 g nominal peak force
			Switch Life	1,000,000 operations (using Hasco modified tester)
	Regulatory Approvals	Cable Length	2 m	
		PC98-99	Mechanically compliant	
		UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BCIQ, C-Tick		

HP Optical Scroll Mouse (USB)	Dimensions (H x L x W)	1.5 x 4.5 x 2.5 in (3.8 x 11.6 x 6.3 cm)
	Weight	0.27 lb (0.12 kg)
	Cable length	72.8 in (185 cm)
	System requirements	Microsoft Windows 95, 98, 2000, Me, and XP

Technical Specifications - Input/Output Devices

HP 3-Button Mouse (PS/2)	Dimensions/Weight	Height	1.42 in (3.6 cm)
		Length	4.17 in (10.7 cm)
		Width	2.87 in (7.4 cm)
		Weight	5.20 oz (150 g)
	Environmental	Operating temperature	32° to 104° F (0° to 40° C)
		Non-operating temperature	-4° to 140° F (-20° to 60° C)
	Mechanical	Operating humidity	10% to 90% (non condensing at ambient)
		Resolution	400 20% DPI
		Tracking speed	10 in/s Maximum
		Switch life	1,000,000 operations (using Hasco modified tester)
		Switch type	Micro-switches
		Tracking mechanism life	155 miles (250 km) at average speed of 10 in/s
		Cable length	6 ft (1.8 m)
PC98-99	Mechanically compliant		

HP 3-Button Optical USB Mouse	Dimensions/Weight	Height	1.5 in (3.76 cm)
		Length	4.5 in (11.56 cm)
		Width	2.4 in (6.19 cm)
		Weight	3.80 oz (108 g)
	Environmental	Operating temperature	32° to 104° F (0° to 40° C)
		Non-operating temperature	-4° to 140° F (-20° to 60° C)
	Mechanical	Operating humidity	10% to 90% (non condensing at ambient)
		Tracking speed	6 in/s Maximum
		Switch life	3,000,000 operations
		Switch type	Micro-switches
		Tracking mechanism life	155 miles (250 km) at average speed of 10 in/s
		Cable length	6 ft (1.8 m)
		System requirements	Microsoft Windows XP Available USB port

Technical Specifications - Input/Output Devices

HP SpaceMouse Plus	Physical characteristics	Dimensions (H x W x D)	7.4 x 4.72 x 1.73 in (18.8 x 12.0 x 4.4 cm)
		Cap Diameter	2 x 6.5 x 6.6 mm
		Weight	1.5 lb (0.68 kg)
		Features	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw) Certified for leading CAD and DCC applications
	Environmental	Operating temperature	14° to 140° F (5° to 60° C)
		Non-operating temperature	-13° to 158° F (-25° to 70° C)
		Operating humidity	10 to 98 % RH (non-condensing)
	Mechanical	Non-operating humidity	10 to 98 % RH (non-condensing)
		Buttons	11 programmable (unshifted)
		Cap Force Range	0.2 N - 4.5 N
	USB Specifications	Cap Torque Range	4 Nmm to 100 Nmm
		Resolution	8 bit
		Connector	USB 1.1 or greater
	Software Drivers Available	Cable Length	6.56 ft (2 m)
		Data Rate	16 msec
System Requirements		Microsoft Windows XP	
Regulatory Approvals	Disk Space	10 MG free disk space	
		UL, cUL, EN 950, EN 60950, CSA, FCC, CE Mark, TUV, CISPR 22, EN 50082, IEC 1000 4-2, IEC 1000-4-3, AS/NZS, VCCI, BSMI, C-Tick	

SpaceBall 5000	Physical characteristics	Dimensions (H x W x D)	3.0 x 6.0 x 8.4 in (7.6 x 15.2 x 21.3 cm)
		Ball Diameter	2.2 in (5.6 cm)
		Weight	2.1 lb (9.94 kg)
		Features	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw) Certified for leading CAD and DCC applications
	Environmental	Operating temperature	50° to 104° F (10° to 40° C)
		Non-operating temperature	43° to 140° F (6° to 60° C)
		Operating humidity	8% to 80% (non-condensing at ambient)
	Mechanical	Non-operating humidity	5% to 80% (non-condensing at ambient)
		Buttons	12 programmable (unshifted) 23 programmable (shifted)
		Ball Force Range	0.5 - 8.2N/1.8 - 29.5 oz
	USB Specifications	Ball Torque Range	0.085 - 0.33 oz-in. (6.91 Nmm)
		Resolution	10 bits
		Connector	9-pin D-subminiature receptacle (DB9S)
		Cable Length	12.8 ft (3.9 m)
		Data Rate	9600 bps
	Flow Control	Xon/Xoff	

Technical Specifications - Input/Output Devices

Regulatory Approvals

UL, cUL, EN 950, EN 60950, CSA, FCC, CE Mark, TUV, CISPR 22, EN 50082, IEC 1000 4-2, IEC 1000-4-3, AS/NZS, VCCI, BSMI, C-Tick

Technical Specifications - Optical Devices

48X CD-ROM Drive	Capacity	700 MB CD disc		
	Dimensions (HxWxD)	1.63 x 5.83 x 7.27 in (4.13 x 14.6 x 18.5 cm)		
	Weight	1.76 lb (0.8 kg)		
	Interface	ATAPI/EIDE		
	Mounting Orientation	Horizontal or vertical		
	Data Transfer Rates - Read	Digital audio extraction (minimum) – 1,200 KB/s (8X) CD read – up to 7,200 KB/s (48X)		
	Media and Formats - Read	Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA Ready, Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (FMV), CD Plus, CD-Extra; Media: stamped, CD-R, CD-RW		
	Data Transfer Modes	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 0 (16.7 MB/s); UltraDMA Mode 2 (33.3 MB/s)		
	Access Times (typical)	Random	< 75 ms @ 48x	
		Full-Stroke	< 150 ms	
	Start-up Time (typical)	< 7 s (single session)	< 30 s (multisession)	
	Stop Time (typical)	< 4 s		
	Read Buffer size	128 KB (minimum)		
	Audio Output	Line-Out	0.7 VRMS	
		Signal-to-Noise Ratio	80 dB	
		Channel Separation	65 dB	
	Configuration Jumper Block	Master, slave, and cable select modes		
	Operating Conditions	Temperature	41° to 122° F (5° to 50° C)	
Humidity		10% to 80%		
Approvals/ Environmental	UL 1950 (US and Canada), CSA, SEMKO, TUV; CE, FDA, FCC, IC, C-TICK			
Operating Systems Supported	Microsoft Windows 2000 and Microsoft Windows XP			
Supplied Software	None			

16X/40X DVD-ROM Drive Height with +R Read Support	Height	5.25-in, half-height, tray load	
	Interface Type	ATAPI/EIDE	
	Dimensions (W x H x D)	5.88 x 1.71 x 7.87 [max] in (149.5 x 43.25 x 200.0 [max] mm) (external, excluding bezel)	
Disc Formats	DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0; DVD-RW version 1.0 and 1.1; DVD-R multi-border; DVD+RW; DVD+R ; CD-ROM Mode 1 and 2; CD-DA; CD-ROM XA Mode 2, Form 1 and 2; CD-extra; CD-text; CD-I Mode 2, Form 1 and 2; CD-I ready; video CD, CD-bridge; PhotoCD (single and multi-session); CD-R; CD-RW		

Technical Specifications - Optical Devices

Disc Capacity	DVD-ROM	4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R)
	CD-ROM	540 MB (Mode 1, 12 cm), 640 MB (Mode 2, 12 cm), 700 MB (80 minimum CD-R and CD-RW), 180 MB (8 cm)
Access Times (typical reads, including settling)	DVD-ROM Single Layer	120 ms
	CD-ROM Mode 1	90 ms
	Full Stroke DVD	240 ms (seek)
	Full Stroke CD	160 ms (seek)
	Startup Time	< 10 seconds (typical)
	Stop Time	< 4 seconds
	Data Transfer Modes	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 3 (44.4 MB/s)
Maximum Data Transfer Rates	CD-ROM Read	6000 KB/s (40X) Max
	DVD-ROM Read	21,600 KB/s (16X) Max
	Digital Audio Extraction	6000 KB/s (40X) Max
Power	Source	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC \pm 5% – 100 mV ripple p-p
		12 VDC \pm 5% – 200 mV ripple p-p
	DC Current	5 VDC – <800 mA typical, < 1000 mA maximum 12 VDC – < 870 mA typical, <1800 mA maximum
Audio Output	Line-Out	0.7 VRMS
	Signal-to-Noise Ratio	85 dB
	Channel Separation	65 dB
Configuration Jumper Block	Master, slave, and cable select modes	
Data Interface Connector	40-pin, shrouded and keyed, flat ribbon	
Operating Environmental (all conditions non-condensing)	Temperature (operating)	41° to 122° F (5° to 50° C)
	Relative Humidity (operating)	10% to 85%
	Maximum Wet Bulb Temperature (operating)	86° F (30° C)
Certifications, Approvals	MMC II support, multi-read certification, Microsoft WHQL certification, ACA AS/NZS 3548 class B, CNS 13438, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992	
Operating Systems Supported	Microsoft Windows 2000, Windows XP Professional	
Kit Contents	16X/40X DVD-ROM Drive, InterVideo WinDVD MPEG Movie Playback software, audio cable, and installation guide.	

HP 48X CD-RW	Height	5.25-inch, half-height, tray-load	
	Mounting Orientation	Horizontal or vertical	
	Interface	ATAPI/EIDE	
	Dimensions (HxWxD)	1.63 x 5.75 x 7.27 [max] in (4.13 x 14.6 x 18.5 [max] cm) (external, excluding bezel)	
	Weight (max)	2.0 lb (0.9 kg)	
	Read Only Disc Parameters	Data Transfer Rates – Read	Digital audio extraction (minimum) – 1,800 KB/s (12X) CD read – up to 7,200 KB/s (48X)
		Media and Formats – Read	Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-ROM XA (Mode 2, Form 1 and 2), Mixed Mode, CD-Plus, CD-Extra, CD-I FMV, Video CD, CD-Text, Photo CD (single and multisession) Media: stamped, CD-R, CD-RW
		Writeable Disc Parameters	Data Transfer Rates – Write CD-R write – 2100 KB/s (14X) to 7200 KB/s (40X) CD-RW write – 600 KB/s (4X) CD-RW write (high speed) – 1500 KB/s (10X) to 1800 KB/s (12X) CD-RW write (ultra high speed) – 2400 KB/s (16X) to 4800 KB/s (32X)
	Access Times (typical reads, including settling)	Media and Formats – Write	Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-ROM XA (Mode 2, Form 1 and 2), Mixed Mode, CD-Plus, CD-Extra, CD-I FMV, Video CD, CD-Text Media: CD-R, CD-RW (including ultra-speed)
		Write Methods	Disc-at-once, session-at-once,, track-at-once, incremental fixed and variable packet, multisession
CD-ROM Mode 1		125 ms	
Access Times (typical reads, including settling)	Full Stroke CD	210 ms (seek)	
	Start-up Time (typical)	<7 s (single session), <30 s (multisession)	
	Stop Time (typical)	<4 s	
	Write Buffer Size	2 MB	
	Data Transfer Modes	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 2 (33.3 MB/s)	

Technical Specifications - Optical Devices

Power	Source	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 5%-200 mV ripple p-p
	DC Current	5 VDC (< 1000 mA typical, < 1600 mA maximum) 12 VDC (< 600 mA typical, < 1400 mA maximum)
	Total Drive Power (standby mode)	< 2.5 Watt
Audio Output	Line-Out	0.7 VRMS
	Signal-to-Noise Ratio	74 dB
	Channel Separation	65 dB
Configuration Jumper Block	Master, slave, and cable select modes	
Operating Conditions	Temperature	41° to 122° F (5° to 50° C)
	Humidity	10% to 90% 10% to 90%
Approvals/Environmental	MPC-3 compliant, multi-read requirements, ATA Spec X3T9.2, ATAPI Spec SFF-8020, ANSI C63.4-1992, UL 1950, ACA AS/NZS 3548, CB Bulletin No. 96A, CSA C22.2 No. 950-1995, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, EMKO-TSE 07/94, TUV EN60950, EN60825-1, MIC, BSMI-CNS 13438, CE, Microsoft PC2001 certification, Microsoft Logo for Windows XP and 2000.	
Operating Systems Supported	Microsoft Windows 2000, Windows XP Professional	
Supplied software	Roxio Easy CD & DVD Creator: Create or copy CDs and DVDs, including music and data CDs, and data DVDs Dantz Retrospect Express: Back up systems to CD, DVD, or tape media.	

48X Combo CD-RW/DVD-ROM

Height	5.25-inch, half-height, tray-load
Mounting Orientation	Either horizontal or vertical
Interface Type	ATAPI/EIDE
Dimensions (W x H x D)	5.77 x 1.71 x 7.87 [max] in (14.66 x 4.34 x 20.0 [max] cm) (external, excluding bezel)
Weight (max)	2.6 lb (1.2 kg)

Technical Specifications - Optical Devices

Read Only Disc Parameters	Formats and Modes Supported	CD-ROM-Mode 1; CD-ROM XA-Mode 2 (forms 1 and 2); CD-Bridge; CD digital audio; CD Extra; CD-I-Mode 2 (forms 1 and 2) and CD-I-Ready; Photo CD (single and multi-session); video CD; DVD (single- and double-layer); DVD-R; DVD-RW; DVD-RW Multi-Border; DVD+R; DVD+R Multisession, and DVD+RW
	Capacity	180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm); 4.7 GB (DVD-5); 8.54 GB (DVD-9); 9.4 GB (DVD-10)
	CD-ROM, CD-R, CD-RW read	7200 KB/s (48X) Max
	DVD ROM read	21,632 KB/s (16X) Max
Writeable Disc Parameters	Disc Type	CD-R and CD-RW
	Write Methods	Disc at Once, Track at Once, Session at Once, Variable Packet, Fixed Packet
	Format and Modes Supported	CD-ROM (mode 1); CD-ROM XA (mode 2, forms 1 and 2); CD digital audio, CD-I (mode 2, forms 1 and 2); video CD; CD-Bridge; Video CD
	Capacity	180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (mode 2, 12 cm)
Access Times (typical reads, including settling)	CD-R write	7200 KB/s (48X) Max
	CD-RW write	4800 KB/s (32X) Max
	Random DVD	< 140 ms (typical)
	Random CD	< 125 ms, (typical)
	Full Stroke DVD	< 250 ms (seek)
	Full Stroke CD	< 210 ms (seek)
	Startup Time (single)	< 7 seconds (typical)
	Startup Time (multi-session)	< 30 seconds (typical)
	Stop Time	< 4 seconds
	Cache Buffer	2 MB (minimum)
	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 44 Mbytes/s (default)

Technical Specifications - Optical Devices

Power	Source	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 5%-200 mV ripple p-p
	DC Current	5 VDC (< 1000 mA typical, < 1600 mA maximum) 12 VDC (< 600 mA typical, < 1400 mA maximum)
	Total Drive Power (standby mode)	< 2.5 Watt
	Audio Output	Line-Out 0.7 VRMS Signal-to-Noise Ratio 74 dB Channel Separation 65 dB
Configuration Jumper Block	Master, slave, and cable select modes	
Data Interface Connector	40-pin, shrouded and keyed, flat ribbon	
Operating Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative humidity	10% to 90%
	Maximum wet bulb temperature	86° F (30° C)
Certifications, Requirements	MPC-3 compliant, multi-read requirements, ATA Spec X3T9.2, ATAPI Spec SFF-8020, ANSI C63.4-1992, UL 1950, ACA AS/NZS 3548, CB Bulletin No. 96A, CSA C22.2 No. 950-1995, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, EMKO-TSE 07/94, TUV EN60950, EN60825-1, MIC, BSMI-CNS 13438, CE, Microsoft PC2001 certification, Microsoft Logo for Windows XP and 2000.	
Operating Systems Supported	Microsoft Windows 2000, Windows XP Professional	
Option Kit Contents	48X Combo CD-RW/DVD-ROM Drive, Roxio Easy CD & DVD Creator, InterVideo WinDVD MPEG Movie Playback software, Dantz Retrospect Express Backup software, audio cable, and installation guide.	

16X DVD+/-RW LightScribe drive

Height	5.25-inch, half-height, tray-load	
Orientation	Either horizontal or vertical	
Interface Type	ATAPI/EIDE	
Disc Recording Capacity	8.5 GB DL or 4.7 GB standard	
Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)	
Weight (maximum)	2.6 lb (1.2 kg)	
Write Speed (maximum)	DVD+R	Up to 16X
	DVD+RW	Up to 4X
	DVD+R DL	Up to 2.4X
	DVD-R	Up to 8X
	DVD-RW	Up to 4X
	CD-R	Up to 40X
	CD-RW	Up to 24X

Technical Specifications - Optical Devices

Read Speed (maximum)	DVD+R/-R/+RW/-RW/+R DL	Up to 8X
	DVD-ROM	Up to 16X
	CD-ROM, CD-R	Up to 40X
	CD-RW	Up to 32X
Access Time (typical reads, including settling)	Random	DVD: < 130 ms (typical), CD: < 120 ms (typical)
	Full Stroke	DVD: < 240 ms (seek), CD: < 200 ms (seek)
	Startup Time	Single-session: < 15 seconds (typical), Multi-session: < 30 seconds (typical)
	Stop Time	< 4 seconds
	Cache Buffer	2 MB (minimum)
	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s -default)
Power	Source	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC \pm 5%-100 mV ripple p-p
		12 VDC \pm 10%-200 mV ripple p-p
	DC Current	5 VDC (< 2000 mA typical, < 2500 mA maximum)
		12 VDC (< 700 mA typical, < 2000 mA maximum)
	Total Drive Power (standby mode)	< 2.5 Watt
Audio Output	Line-Out	0.7 VRMS
	Signal-to-Noise Ratio	74 dB
	Channel Separation	65 dB
Operating Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative humidity	10% to 90%
	Maximum wet bulb temperature	86° F (30° C)
System Configuration	Intel® Pentium® III Processor or later with 128 MB of memory (required); 256 MB recommended 2-D or 3-D graphics cards on primary disk drive for operating system and application software; second disk drive for audio and video data	
Operating Systems Support	Microsoft Windows 2000, Windows XP Professional, Windows XP Home	
Regulatory Approvals	MPC-3 compliant, multi-read requirements, ATA Spec X3T9.2, ATAPI Spec T13.1153D, ANSI C63.4-1992, UL 1950, ACA AS/NZS 3548, CB Bulletin No. 96A, CSA C22.2 No. 950-1995, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, EMKO-TSE 07/94, TUV EN60950, EN60825-1, MIC, BSMI-CNS 13438, CE, Microsoft PC2001 certification, Microsoft Logo for Windows XP and 2000.	
Option Kit contents	16X DVD+/-RW LightScribe* drive, LightScribe software, InterVideo WinDVD, InterVideo WinDVD Creator, Roxio Easy Media Creator 7, Dantz Retrospect Express Backup Software, installation guide, and DVD+R media.	

Technical Specifications - Graphics

NVIDIA Quadro NVS 280 Graphics Card (PCI-Express)	Form Factor	ATX																
	Graphics Controller	Integrated Quadro 280 2-D graphics processor unit (GPU)																
	VGA controller	Integrated into the Quadro GPU																
	Bus Type	PCI-Express x16 or PCI																
	RAMDAC	Dual 350 MHz integrated																
	Memory	64 MB 000 MHz DDR SDRAM unified frame buffer, Z-buffer and Texture storage																
	Connectors	Single High-density Flex Connector																
	Multi-monitor support	Dual integrated analog display controllers supporting up to two analog displays at 1920 x1200 @ 85 Hz or two digital displays at 1600 x 1200 @ 60 Hz																
	Additional product features	<table border="0"> <tr> <td>Controller clock speed</td> <td>250 MHz</td> </tr> <tr> <td>Color planes</td> <td>32-bit color buffer</td> </tr> <tr> <td>Overlay planes</td> <td>1 16-bit Video overlay plane</td> </tr> <tr> <td>Maximum vertical refresh rate</td> <td>120 Hz</td> </tr> <tr> <td>Maximum pixel clock</td> <td>350 MHz</td> </tr> <tr> <td>Single DVI Support</td> <td>Yes</td> </tr> <tr> <td>Dual DVI Support</td> <td>Yes</td> </tr> <tr> <td>High-definition Video Processor (HDVP)</td> <td>Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling</td> </tr> </table>	Controller clock speed	250 MHz	Color planes	32-bit color buffer	Overlay planes	1 16-bit Video overlay plane	Maximum vertical refresh rate	120 Hz	Maximum pixel clock	350 MHz	Single DVI Support	Yes	Dual DVI Support	Yes	High-definition Video Processor (HDVP)	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
Controller clock speed	250 MHz																	
Color planes	32-bit color buffer																	
Overlay planes	1 16-bit Video overlay plane																	
Maximum vertical refresh rate	120 Hz																	
Maximum pixel clock	350 MHz																	
Single DVI Support	Yes																	
Dual DVI Support	Yes																	
High-definition Video Processor (HDVP)	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling																	
	PCI-Express	Supports X16 PCI-E																
	Available graphics drivers	Microsoft Windows XP or Windows 2000 (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode) HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html .																
	Maximum resolution	2048 x 1536 Analog 1600 x 1200 Digital																

Technical Specifications - Graphics

<p>NVIDIA Quadro NVS 285 Form Factor PCIe Graphics with TC Technology</p>	<p>Graphics Controller Bus Type Memory</p>	<p>Nvidia Quadro NVS 285 128MB PCIe Dual Head Low profile, both ATX and low profile brackets included Integrated Quadro 285 2D graphics processor unit (GPU) PCI-Express 128 MB DDR (64 MB local frame buffer plus 64 MB of shared system memory via TurboCache technology) NOTE: The graphics card uses part of the total system memory (RAM) for graphics performance. System memory dedicated to graphics performance is not available for other use by other programs.</p>
	<p>Connectors Dimensions Overlay planes Multi-monitor support Maximum pixel clock RAMDAC High-definition Video Processor (HDVP)</p>	<p>DMS-59 to dual-DVI Y-cable or dual-VGA Y-cable Low-profile, 2.586 x 6.6 in (6.57 x 16.76 cm) One 16-bit Video overlay plane Dual analog or digital monitors 350 MHz Dual 350 MHz (integrated) Full screen, full frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling</p>
	<p>Available graphics drivers</p>	<p>Microsoft Windows 2000 and Microsoft Windows XP (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode) HP qualified drivers may be preloaded or available from the HP support Web site: http://www.hp.com/country/us/en/support.html?pageDisplay=drivers</p>

<p>NVIDIA Quadro FX 540 PCI-Express Graphics Card</p>	<p>Form Factor Graphics Controller Bus Type RAMDAC Memory</p>	<p>ATX, 4.376" x 7.0" Single slot NVIDIA NV43GL PCI-Express x16, <75W power consumption Dual 400 MHz integrated 128 MB 275 MHz DDR SDRAM unified frame buffer, Z-buffer and Texture storage 8.8 GB/sec graphics memory bandwidth</p>
	<p>Connectors Multi-monitor support</p>	<p>DVI-I + VGA + 10-pin HDTV Out (HD cable purchased separately) Integrated analog display controller supporting a single analog display at 2048x1536 @ 75Hz, one digital display at 1600x1200 @ 60Hz.</p>

Technical Specifications - Graphics

Additional product features	<p>128 KB BIOS 3.3V Flash ROM reprogrammable by SW</p> <p>Hardware accelerated Overlay Planes</p> <p>Hardware accelerated two-sided lighting</p> <p>Hardware accelerated antialiased points and lines</p> <p>3D Volumetric Texture support</p> <p>Hardware accelerated Occlusion Culling</p> <p>Compliant with Microsoft/Intel PC2001 Workstation requirements</p> <p>Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications</p> <p>DDC2B+ Monitor support on all OS platforms</p> <p>ACPI Version 1.0b Power Management support (all modes)</p>
Shading architecture	<p>Fully programmable GPU (OpenGL 1.5/DirectX 9.0c class)</p> <p>Long fragment programs (up to 65,536 instructions)</p> <p>Long vertex programs (up to 65,536 instructions)</p> <p>Looping and subroutines (up to 256 loops per vertex program)</p> <p>Dynamic flow control</p> <p>Conditional execution</p> <p>Optimized compilers for Cg, OpenGL shading language, and Microsoft HLSL</p>
Supported graphics APIs	<p>OpenGL 1.5 ICD with immediate mode support for all OGL primitive types</p> <p>DirectX 9.0c</p>
Available graphics drivers	<p>HP-tested: Microsoft Windows XP, Windows 2000, and Linux</p> <p>HP qualified drivers may be preloaded or available from the HP support Web site:</p> <p>http://welcome.hp.com/country/us/eng/software_drivers.html.</p>
Maximum Resolution	<p>DVI-I output - drives digital display at resolutions up to 1600x1200 @ 60Hz</p> <p>Internal 400MHz RAMDACs – drives dual analog display up to 2048x1536 @ 75Hz each</p>

NVIDIA Quadro FX 1400 PCI-Express Graphics Controller	Form Factor	<p>ATX, 4.376" x 8.5"</p> <p>Single slot</p>
	Graphics Controller	NVIDIA NV41GL
	Bus Type	PCI-Express x16, <75W power consumption
	RAMDAC	Dual 400 MHz integrated
	Memory	<p>128 MB 300 MHz DDR SDRAM unified frame buffer, Z-buffer and Texture storage</p> <p>19.2 GB/s graphics memory bandwidth</p>
	Connectors	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	Multi-monitor support	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays.

Technical Specifications - Graphics

Additional product features	<p>128 KB BIOS 3.3V Flash ROM reprogrammable by SW</p> <p>Hardware accelerated Overlay Planes</p> <p>Hardware accelerated two-sided lighting</p> <p>Hardware accelerated antialiased points and lines</p> <p>Quad-buffered Stereo</p> <p>3D Volumetric Texture support</p> <p>Hardware accelerated Occlusion Culling</p> <p>Scalable Link Interface (SLI) technology</p> <p>Compliant with Microsoft/Intel PC2001 Workstation requirements</p> <p>Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications</p> <p>DDC2B+ Monitor support on all OS platforms</p> <p>ACPI Version 1.0b Power Management support (all modes)</p>
Shading architecture	<p>Fully programmable GPU (OpenGL 1.5/DirectX 9.0c class)</p> <p>Long fragment programs (up to 65,536 instructions)</p> <p>Long vertex programs (up to 65,536 instructions)</p> <p>Looping and subroutines (up to 256 loops per vertex program)</p> <p>Dynamic flow control</p> <p>Conditional execution</p> <p>Optimized compilers for Cg, OpenGL shading language, and Microsoft HLSL</p>
Supported graphics APIs	<p>OpenGL 1.5 ICD with immediate mode support for all OGL primitive types</p> <p>DirectX 9.0c</p>
Available graphics drivers	<p>HP-tested: Microsoft Windows XP, Windows 2000 and Linux</p> <p>HP qualified drivers may be preloaded or available from the HP support Web site:</p> <p>http://welcome.hp.com/country/us/eng/software_drivers.html.</p>
Maximum Resolution	<p>Dual DVI-I output – drives dual digital displays at resolutions up to 1900x1200 @ 60Hz</p> <p>Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 85Hz each</p>

NVIDIA Quadro FX 3400 Graphics Card	Form Factor	ATX
	Graphics Controller	NVIDIA NV45GL
	Bus Type	PCI-Express x16
	Memory	256 MB 450 MHz GDDR3 SDRAM unified frame buffer, Z-buffer and Texture storage
	Connectors	2 DVI-I (one dual-link/one single-link) analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	Multi-monitor support	<p>Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1600x1200 (single-link) and 3840x2400 (dual-link).</p> <p>NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft Windows</p>
	RAMDAC	Dual 400 MHz integrated

Technical Specifications - Graphics

Architecture features	<ul style="list-style-type: none"> 256-bit memory interface 128-bit IEEE floating-point precision graphics pipeline 128-bit color precision 12-bit sub-pixel precision 8x FSAA at 1920x1200, 4x at 2048x1536, rotated grid FSAA sampling algorithm Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Scalable Link Interface (SLI) technology 3rd generation occlusion culling 3D volumetric texture support Quad-buffered stereo Dual Link DVI enabling driving digital displays up to 3840x2400 (24Hz)
Shading architecture	<ul style="list-style-type: none"> Fully programmable GPU Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
Supported graphics APIs	<ul style="list-style-type: none"> OpenGL 1.5 DirectX 9.0
Available graphics drivers	<ul style="list-style-type: none"> HP-tested: Microsoft Windows XP, Windows 2000, and Linux HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html.
Maximum Resolution	<ul style="list-style-type: none"> Dual DVI-I output – drives dual digital displays at resolutions up to 1600x1200 @ 60Hz (single-link) and 3840x2400 @ 24Hz (dual-link). Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 75Hz each

NVIDIA Quadro FX 3450 Graphics Controller	Form Factor	ATX
	Graphics Controller	NVIDIA Quadro FX 3450 Workstation GPU
	Bus Type	PCI-Express x16
	Memory	256 MB 450 MHz GDDR3 SDRAM unified graphics memory
	Connectors	2 DVI-I (one dual-link/one single-link) analog/digital monitor outputs, 1 3-pin Mini DIN stereo output, DVI-I to VGA adapters included
	Multi-Monitor Support	<ul style="list-style-type: none"> Dual integrated display controllers supporting up to two analog displays at 2048 x 1536 @ 75 Hz on both displays or dual digital displays at 1920 x 1200 (single-link) and 3840 x 2400 (dual-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft Windows

Technical Specifications - Graphics

Architecture Features	<ul style="list-style-type: none"> 256-bit memory interface 128-bit IEEE floating-point color precision 12-bit sub-pixel precision 65,536 fragment instruction 65,536 vertex instruction 3D volumetric textures Single-system powerwall 12 pixels per clock rendering engine Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes 3rd generation occlusion culling 16 textures per pixel in fragment programs Window ID clipping functionality Hardware accelerated line stippling OpenGL Quad-buffered stereo
Shading Architecture	<ul style="list-style-type: none"> Fully programmable GPU (OpenGL 2.0/DirectX 9.0c class) Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
High Level Shader Languages	<ul style="list-style-type: none"> Optimized compiler for Cg and Microsoft® HLSL OpenGL 2.0 and DirectX 9.0c support Open source compiler
High-Resolution Antialiasing	<ul style="list-style-type: none"> 12-bit subpixel sampling precision enhances AA quality Rotated-grid full-scene antialiasing (RG FSAA) 8x FSAA dramatically reduces visual aliasing artifacts or "jaggies" at resolution up to 1920x1200
Display Resolution Support	<ul style="list-style-type: none"> Dual Link DVI- I output-drives digital displays at resolutions up to 3840 x 2400 @ 24 Hz Single Link DVI-I output drives digital displays at resolutions up to 1920 x 1200 @ 75 Hz Internal 400 MHz DACs - Two analog displays up to 2048 x 1536 @ 75 Hz each
nView Architecture	<ul style="list-style-type: none"> Advanced multi-display desktop & application management seamlessly integrated into Microsoft Windows.
Supported Graphics APIs	<ul style="list-style-type: none"> OpenGL 2.0 ICD with immediate mode support for all OGL primitive types DirectX 9.0c
Available Graphics Drivers	<ul style="list-style-type: none"> Microsoft Windows XP, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support web site: http://welcome.hp.com/country/us/eng/software_drivers.html.

NVIDIA Quadro FX 4500 Graphics Controller	Graphics Controller	NVIDIA Quadro FX 4500 Workstation GPU
	Bus Type	PCI Express x16
	RAMDAC	Dual 400 MHz integrated

Technical Specifications - Graphics

Memory	512 MB GDDR3 SDRAM unified graphics memory
Form Factor	ATX
Connectors	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output, DVI-I to VGA adapters included
Multi-Monitor Support	Dual integrated display controllers supporting up to 2048 x 1536 @ 75 Hz (analog) or 3840 x 2400 @ 41 Hz (digital) on both displays
NVIDIA Quadro FX 4500 Architecture	256-bit memory interface 35.2GB/sec. memory bandwidth Full 128-bit floating point color precision 12-bit subpixel precision 65,536 fragment instruction 65,536 vertex instruction 3D volumetric textures Single-system powerwall 12 pixels per clock rendering engine Hardware accelerated antialiased points & lines Hardware OpenGL® overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Hardware two-sided lighting 3rd-generation occlusion culling OpenGL quad-buffered stereo Hardware-Accelerated Pixel Read-Back
Shading Architecture	16 textures per pixel in fragment programs Window ID clipping functionality Hardware accelerated line stippling Fully programmable GPU (OpenGL2.0/DirectX 9.0c class) Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
High Level Shader Languages	Optimized compiler for Cg and Microsoft HLSL OpenGL 2.0 and DirectX 9.0c support Open source compiler
High-Resolution Antialiasing	12-bit subpixel sampling precision enhances AA quality Rotated-grid full-scene antialiasing (RG FSAA) 16x FSAA dramatically reduces visual aliasing artifacts or "jaggies" at resolution up to 1920x1200
Display Resolution Support	Dual Dual Link DVI- I output-drives digital displays at resolutions up to 3840 x 2400 @ 41 Hz Internal 400 MHz DACs - Two analog displays up to 2048 x 1536 @ 75 Hz each
nView Architecture	Advanced multi-display desktop & application management seamlessly integrated into Microsoft Windows.
Supported Graphics APIs	OpenGL 2.0 ICD with immediate mode support for all OGL primitive types DirectX 9.0c

Technical Specifications - Graphics

Available Graphics drivers

Microsoft Windows XP, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions.

HP qualified drivers may be preloaded or available from the HP support web site:

http://welcome.hp.com/country/us/eng/software_drivers.html

Technical Specifications - Monitors

HP L1755 Flat Panel Monitor	Panel	Type	Active matrix, thin film transistor (TFT)	
		Viewable Image Area (diagonal)	17 in (43.2 cm) maximum viewable	
		Screen Opening (WxH)	13.4 x 10.7 in (33.9 x 27.2 cm)	
		Viewing Angle (typical)	176 degrees horizontal/176 degrees vertical (10:1 minimum contrast ratio)	
		Brightness (typical)	Up to 250 nits (cd/m ²)	
		Contrast Ratio (typical)	Up to 1000:1 (typical)	
		Response Rate (typical)	25 ms (typical rise + fall)	
		Pixel Pitch	0.264 mm	
		Color Depth Support	16.7 million colors	
		Plug and Play	Yes (supports VESA DDC2B; PC2001 compliant)	
Video/Other Inputs		Self Powered USB 2.0 Hub	One upstream, four downstream ports (cable included)	
		Input Signal	Two connectors: one 15-pin mini D-sub analog VGA; and one DVI-I (VGA analog or digital)	
		Input Impedance	75 ohms ± 2%	
		Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green (activated through on-screen display)	
		Video Cable	VGA to VGA, DVI-D to DVI-D, and DVI-I to VGA	
		Video Cable Length	78 in (2.0 m)	
	Signal Interface/ Performance		Horizontal Frequency	30 to 82 kHz
			Vertical Frequency	56 to 75 Hz
			Native Resolution	1280 x 1024 @ 60 Hz analog 1280 x 1024 @ 60 Hz digital
			Maximum Resolution (Analog)	1280 x 1024 @ 75 Hz analog
		Maximum Resolution (Digital)	1280 x 1024 @ 75 Hz digital	
		Preset VESA Graphic Modes (non-interlaced)	640 x 480 @ 60 Hz, 72 Hz, 75 Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz, 72 Hz, 75 Hz 1024 x 768 @ 60 Hz, 70 Hz, 75 Hz 1280 x 1024 @ 60 Hz, 75 Hz	
		Preset MAC Mode	832 x 624 @ 75 Hz 1152 x 870 @ 75 Hz	
		Preset VGA Mode	640 x 480 @ 60 Hz, 72 Hz	
		Preset SUN Mode	1152 x 900 @ 76 Hz	
		Fail Safe Mode	Yes (limits out of range signal messages)	
	Maximum Pixel Clock Speed	140 MHz		
	User Programmable Modes	Yes, 15		
	Anti-Glare	Yes		

Technical Specifications - Monitors

	Anti-Static	Yes	
	AssetControl	Yes (accessible on HP Compaq Business Desktops featuring Intelligent Manageability)	
	Default Color Temperature	Yes (6500k, 9300k, SRGB, Custom User)	
On Screen Display (OSD) Controls	Buttons or Switches	Power on/off; 3-button OSD; second level OSD buttons include dual-input switch, dedicated auto adjust switch	
	Languages	English, Spanish, French, German, Italian, Japanese, Simplified Chinese	
	User Controls	Size and positioning, contrast, brightness, clock, clock phase, selectable color temperature, serial number, mode displayed, sleep timer, input selection, factory reset, individual color contrast, full-screen resolution	
Power	Power Supply	Auto-ranging, 90 to 265 VAC; internal power supply	
	Input Power	100 ~ 240 VAC	
	Nominal Current	1.5 A maximum	
	Frequency	50 ~ 60 Hz	
	Average	33 watts when displaying standard office software	
	Typical Power Consumption	< 40 watts	
	Maximum	< 60 watts	
	Power Saving Off Mode	< 2 W	
		0 watts (when master power switch is in the off position)	
		70 in (1.8 m); non-captive	
Mechanical	Power Cable Length		
	Dimensions (H x W x D)	Unpacked with stand 16.1 (minimum) to 21.2 (maximum) x 14.4 x 8.3 in (40.9 (minimum) to 42.2 (maximum) x 36.5 x 21.1 cm)	
		Base Area (Footprint D x W) 8.3 x 12.2 in (21.1 x 30.9 cm)	
		Panel only (without stand) (H x W x D) 11.8 x 14.4 x 2.9 in (30.1 x 40.9 x 7.3 cm)	
	Weight	Unpacked with stand	14.7 lb (6.7 kg)
		Unpacked without stand	8.1 lb (3.7 kg)
		Packaged	20.2 lb (9.2 kg)
	Bezel Width	13 mm left and right, 14 mm top, and 15 mm bottom	
	Tilt Range	-5° to +35°	
	Swivel Range	± 50° horizontal swivel	
Height Adjustable	Yes (5.1 in/13 cm adjustment range)		

Technical Specifications - Monitors

	Pivot Rotation	Yes, 90 °
	Base	Ships detached and is removable after installation
Environmental	Temperature – Operating	41° to 95° F (5° to 35° C)
	Temperature – Non-operating	-4° to 140° F (-20° to 60° C)
	Humidity – Operating	20% to 80%
	Humidity – Non-operating	5% to 95%
	Altitude – Operating	0 to 13,000 ft (0 to 4,000 m)
	Altitude – Non-operating	0 to 40,000 ft (0 to 12,192 m)
Options	HP Desktop Access Center – Part number: DK985A	Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions. Sold separately. For more information, refer to the HP Desktop Access Center QuickSpec document.
	HP Flat Panel Speaker Bar – Part number: PF804AA	Powered directly by the monitor, seamlessly attaches to the monitor's bezel to bring full multimedia support to select HP flat panel monitors. Features dual speakers with full sound range and external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec document.
	HP Compaq 7000 Series Ultra-slim Desktop Integrated Work Center Stand – Part number: DL641B	Allows mounting of a 15-, 17- or 19-inch HP flat panel monitor and an HP Compaq dc7100 Ultra-slim Desktop PC on a single stand for the convenience of an "all-in-one" form factor. Sold separately. For more information, refer to this product's QuickSpec document
Other	Accessories Included	VGA to VGA cable, DVI-D to DVI-D cable, DVI-I to VGA cable, USB cable, user CD-ROM with Pivot Pro software
	Software	Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.
	Software	HP Display LiteSaver feature lets you schedule Sleep mode at preset times to help protect the display against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.

Technical Specifications - Monitors

	User Guide Languages	English, Latin America Spanish, Brazilian Portuguese, Danish, Dutch, Finnish, French, German, Italian, Norwegian, Swedish, Greek, Polish, Russian, Slovenian, Turkish, Simplified Chinese, Traditional Chinese, Korean, and Japanese
	Warranty Languages	English, Canadian French, Latin America Spanish, Brazilian Portuguese, Danish, Dutch, Finnish, French, German, Italian, Norwegian, Spanish, Swedish, Bahasa Indonesian, Simplified Chinese, Traditional Chinese, and Korean
	Color	Carbonite, two-tone carbonite and silver (EMEA only)
	VESA Mounting	Yes (swing arm/wall mount not included); base must be removed for mounting options)
	VESA External Mounting	Yes (standard 4 hole pattern, 100 mm)
	Kensington Lock-ready	Yes
Certification and Compliance		Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCC Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, MPR-II Compliant, PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 or 03 depending on region (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification
Compatibility		VESA Video Signal Standard (VSI) Compliant video cards have been tested and proven compatible for use with the HP L1755 Flat Panel Monitor. Recommended for use with HP products.
Service and Warranty		Limited three-year parts and repair labor, service provider labor, and on-site service. Next business day advanced exchange direct replacement service available during warranty period. Certain restrictions and exclusions apply. For details, contact HP Customer Support.

HP L1955 Flat Panel Monitor	Panel	Type	Active matrix, thin film transistor (TFT)
		Viewable Image Area	19 in (48.25 cm) maximum viewable (diagonal)
		Screen Opening (WxH)	14.9 x 12.0 in (38.0 x 30.5 cm)
		Viewing Angle (typical)	176 degrees horizontal/176 degrees vertical (10:1 minimum contrast ratio)
		Brightness (typical)	Up to 250 nits (cd/m ²)
		Contrast Ratio (typical)	Up to 1000:1 (typical)
		Response Rate (typical)	<16 ms (typical rise + fall)
		Pixel Pitch	0.294 mm
		Color Depth Support	16.7 million colors

Technical Specifications - Monitors

Video/Other Inputs	Plug and Play	Yes (supports VESA DDC2B; PC2001 compliant)	
	Self Powered USB 2.0 Hub	One upstream, four downstream ports (cable included)	
	Input Signal	Two connectors: one 15-pin mini D-sub analog VGA; and one DVI-I (VGA analog or digital)	
	Input Impedance	75 ohms \pm 2%	
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green (activated through on-screen display)	
	Video Cable	VGA to VGA, DVI-D to DVI-D, and DVI-I to VGA	
	Video Cable Length	78 in (2.0 m)	
	Signal Interface/ Performance	Horizontal Frequency	30 to 82 kHz
		Vertical Frequency	56 to 75 Hz
		Native Resolution	1280 x 1024 @ 75 Hz analog 1280 x 1024 @ 60 Hz digital
		Maximum Resolution (Analog)	1280 x 1024 @ 75 Hz analog
		Maximum Resolution (Digital)	1280 x 1024 @ 75 Hz digital
		Preset VESA Graphic Modes (non-interlaced)	640 x 480 @ 60 Hz, 72 Hz, 75 Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz, 72 Hz, 75 Hz 1024 x 768 @ 60 Hz, 70 Hz, 75 Hz 1280 x 1024 @ 60 Hz, 75 Hz
		Preset MAC Mode	832 x 624 @ 75 Hz 1152 x 870 @ 75 Hz
Preset VGA Mode		640 x 480 @ 60 Hz, 72 Hz	
Preset SUN Mode		1152 x 900 @ 76 Hz	
Fail Safe Mode		Yes (limits out of range signal messages)	
Maximum Pixel Clock Speed		140 MHz	
User Programmable Modes		Yes, 15	
Anti-Glare		Yes	
Anti-Static		Yes	
AssetControl	Yes (accessible on HP Compaq Business Desktops featuring Intelligent Manageability)		
Default Color Temperature	Yes (6500k, 9300k, SRGB, Custom User)		
On Screen Display (OSD) Controls	Buttons or Switches	Power on/off; 3-button OSD; second level OSD buttons include dual-input switch, dedicated auto adjust switch	
	Languages	English, Spanish, French, German, Italian, Japanese, Simplified Chinese	
	User Controls	Size and Positioning Contrast	

		Brightness
		Clock, Clock Phase
		Selectable Color Temperature
		Serial Number
		Mode Displayed
		Sleep Timer
		Input Selection
		Factory Reset
		Individual Color Contrast
		Full-screen Resolution
Power	Power Supply	Auto-ranging, 90 to 265 VAC; internal power supply
	Input Power	100 ~ 240 VAC
	Nominal Current	1.5 A maximum
	Frequency	50 ~ 60 Hz
	Average	33 watts when displaying standard office software
	Typical Power Consumption	< 40 watts
	Maximum	< 60 watts
	Power Saving Off Mode	< 2 watts
		0 watts (when master power switch is in the off position)
	Power Cable Length	70 in (1.8 m); non-captive
Mechanical	Dimensions (H x W x D)	Unpacked with stand 16.8 (minimum) to 22.3 (maximum) x 15.9 x 8.3 in (42.7 (minimum) to 56.6 (maximum) x 40.4 x 21.1 cm)
		Base Area (Footprint D x W) 8.3 x 12.2 in (21.1 x 30.9 cm)
		Panel only (without stand) (H x W x D) 13.2 x 15.9 x 3.1 in (33.5 x 40.4 x 7.9 cm)
	Weight	Unpacked with stand 16.5 lb (7.5 kg)
		Unpacked without stand 10.5 lb (4.75 kg)
		Packaged 23.5 lb (10.7 kg)
	Bezel Width	13 mm left and right, 14 mm top, and 15 mm bottom
	Tilt Range	-5° to +35°
	Swivel Range	± 50° horizontal swivel
	Height Adjustable	Yes (5.1 in/13 cm adjustment range)
	Pivot Rotation	Yes, 90 °
	Base	Ships detached and is removable after installation

Technical Specifications - Monitors

Environmental	Temperature – Operating	41° to 95° F (5° to 35° C)
	Temperature – Non-operating	-4° to 140° F (-20° to 60° C)
	Humidity – Operating	20% to 80%
	Humidity – Non-operating	5% to 95%
	Altitude – Operating	0 to 13,000 ft (0 to 4,000 m)
	Altitude – Non-operating	0 to 40,000 ft (0 to 12,192 m)
Options	Desktop Access Center	Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions. Sold separately; part number DK985A. For more information, refer to the HP Desktop Access Center QuickSpecs.
	HP Flat Panel Speaker Bar	Powered directly by the monitor, seamlessly attaches to the monitor's bezel to bring full multimedia support to select HP flat panel monitors. Features dual speakers with full sound range and external jack for headphones. Sold separately, part number PF804AA. For more information, refer to the HP Flat Panel Speaker Bar QuickSpecs.
Other	Accessories Included	VGA to VGA cable, DVI-D to DVI-D cable, DVI-I to VGA cable, USB cable, user CD-ROM with Pivot Pro software
	Software	Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.
	Software	HP Display LiteSaver feature lets you schedule Sleep mode at preset times to help protect the display against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.
	User Guide Languages	English
	Warranty Languages	English
	Color	Carbonite, two-tone carbonite and silver (EMEA only)
	VESA Mounting	Yes (swing arm/wall mount not included); base must be removed for mounting options)
	VESA External Mounting	Yes (standard 4 hole pattern, 100 mm)
	Kensington Lock-ready	Yes

Technical Specifications - Monitors

Certification and Compliance	Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, MPR-II Compliant, PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 or 03 depending on region (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification
Compatibility	VESA Video Signal Standard (VSI) Compliant video cards have been tested and proven compatible for use with the HP L1955 Flat Panel Monitor. Recommended for use with HP products.
Service and Warranty	Limited three-year parts and repair labor, service provider labor, and on-site service. Next Business Day advanced exchange direct replacement service available during warranty period. Certain restrictions and exclusions apply. For details, contact HP Customer Support.

HP Flat Panel Monitor L2035	Panel	Type	20-inch Active Matrix TFT (thin film transistor)
		Viewable Image Area (diagonal)	20.1 in (51 cm)
		Screen Opening (W x H)	16.2 x 12.17 in (41.1 x 30.9 cm)
		Viewing Angle (typical)*	Up to 170° H/170° V (10:1 minimum contrast ratio)
		Brightness (typical*)	Up to 250 nits (cd/m ²)
		Contrast Ratio (typical)*	Up to 400:1
		Response Rate (typical)*	16 ms (typical, rise + fall)
		Pixel Pitch	0.255 mm
		Color Depth Support	16.7 million colors
On Screen Display (OSD) Controls	Buttons or Switches	PiP (Picture in Picture), Input select, auto adjust, OSD up, OSD down, OSD menu select, power	
	Languages	English, French, German, Spanish, Italian	
	User Controls	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, video picture-in-picture (size and position), input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset	

Technical Specifications - Monitors

Signal Interface/ Performance	Horizontal Frequency	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	Vertical Frequency	48 to 85 Hz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	Graphics Controller	Pixelworks PW171	
	Native Resolution	1600 x 1200 @ 60 Hz (recommended)	
	Preset VESA Graphic Modes (non-interlaced)	1600 x 1200 @ 60 Hz, 75 Hz (VGA input)	
		1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz	
		1280 x 960 @ 60 Hz	
		1152 x 900 @ 66 Hz	
		1024 x 768 @ 60 Hz, 75 Hz, 85 Hz	
		800 x 600 @ 60 Hz, 85 Hz	
		640 x 480 @ 60 Hz, 75 Hz, 85 Hz	
		Text Mode	720 x 400 @ 70 Hz
		Mac Mode	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
		Sun Mode	1152 x 900 @ 66 Hz
	Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)	
	User Programmable Modes	Yes, 10	
	Anti-Glare	Yes	
	Anti-Static	Yes	
	Default Color Temperature	6500 K	
	Video Input	Plug and Play	Yes
Input Signal		Four connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, and one s-video	
Input Impedance		75 ohms \pm 10%	
Sync Input		Separate sync (HSYNC/VSYNC); composite sync, Sync on Green	
Video Cable		VGA to VGA; VGA to DVI-I; DVI-D to DVI-I	
Power	Video Cable Length	5.9 ft (1.8 m)	
	Input Power	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz	
	Frequency	47.5 to 63 Hz	
	Maximum	< 75 W	
	Power Saving	< 5 W	
	Power Cable Length	5.9 ft (1.8 m)	

Technical Specifications - Monitors

Mechanical	Dimensions (H x W x D)	Unpacked with stand	17.36 to 20.9 x 17.8 x 8.27 in (44.1 to 53.1 x 45.2 x 21.0 cm)
		Unpacked without stand (head only)	14.29 x 17.8 x 3.19 in (36.3 x 45.2 x 8.1 cm)
		Packaged	11.5 x 21.9 x 23.9 in (29.2 x 55.6 x 60.6 cm)
	Weight	Unpacked	With stand: 20.28 lb (9.2 kg); Without stand: 12.35 lb (5.6 kg)
		Packaged	26.9 lb (12.2 kg)
		Tilt Range	-5° to + 25° vertical
	Environmental	Swivel Range	-35° to + 35°
		Height Adjustable	Yes, range 3.54 in (9.0 cm)
		Pivot Rotation	Yes
		Base	Attached
Temperature – Operating		46° to 95° F (10° to 35° C)	
Temperature – Non-operating		6° to 140° F (-10° to 60° C)	
Humidity – Operating		20% to 80% non-condensing	
Options	Humidity – Non-operating	5% to 85%	
	Altitude – Operating	+ 12,000 ft (+3,657.6 m)	
	Altitude – Non-operating	+ 40,000 ft (+12,192 m)	
	HP Desktop Access Center	Sold separately, the HP Desktop Access Center features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions; part number DK985A. For more information, refer to the HP Desktop Access Center QuickSpecs.	

Technical Specifications - Monitors

Other	Accessories Included	VGA to VGA cable – connects the graphic card's VGA analog connector to the monitor's input #1 (VGA analog) connector VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #2 (DVI-I analog) connector DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector
	User Guide Languages	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	Warranty Languages	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	Color	Carbonite/Silver
	VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)
	Kensington Lock-Ready	Yes
Certification and Compliance		Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Windows Certification (Microsoft Windows 98, Microsoft Windows 2000, and Microsoft Windows XP)
Service and Warranty		Limited three years parts, labor, and on-site service, including backlight. Availability varies by region. Certain restrictions and exclusions apply. Consult HP Customer Service for details.

HP Flat Panel Monitor L2335	Panel	Type	23-inch Active Matrix TFT (thin film transistor)
		Viewable Image Area (diagonal)	23 in (58.4 cm)
		Screen Opening (W x H)	19.53 x 12.24 in (49.6 x 31.1 cm)
		Viewing Angle (typical)*	Up to 170° H/170° V (10:1 minimum contrast ratio)
		Brightness (typical)*	Up to 250 nits (cd/m ²)
		Contrast Ratio (typical)*	Up to 500:1
		Response Rate (typical)*	16 ms (typical, rise + fall)
		Pixel Pitch	0.258 mm
		Color Depth Support	16.7 million colors

* All specifications are provided by the component manufacturers. Performance specifications represent the highest specification of all HP's component manufacturers' typical level specifications for performance. Actual performance may vary either higher or lower.

On Screen Display (OSD) Controls	Buttons or Switches	PiP (Picture in Picture), Input Select, Auto Adjust, OSD Up, OSD Down, OSD Menu Select, Power	
	Languages	English, French, German, Spanish, Italian	
	User Controls	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, video picture-in-picture (size and position), input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset	
Signal Interface/ Performance	Horizontal Frequency	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	Vertical Frequency	48 to 85 Hz (VGA and DVI input)	
	Graphics Controller	Pixelworks PW172	
	Native Resolution	1920 x 1200 @ 60 Hz (recommended)	
	Preset VESA Graphic Modes (non-interlaced)		1920 x 1200 @ 60Hz
			1600 x 1200 @ 60 Hz, 75 Hz
			1280 x 1024 @ 60 Hz, 75Hz, 85 Hz
			1280 x 960 @ 60 Hz
			1152 x 900 @ 66 Hz
			1024 x 768 @ 60 Hz, 75 Hz, 85 Hz
			800 x 600 @ 60 Hz, 75Hz
		640 x 480 @ 60 Hz, 75 Hz	
	Text Mode	720 x 400 @ 70 Hz	
	Mac Mode	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz	
	Sun Mode	1152 x 900 @ 66 Hz	
	Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)	
User Programmable Modes	Yes, 10		
Anti-Glare	Yes		
Anti-Static	Yes		
Default Color Temperature	6500 K		
Video Input	Plug and Play	Yes	
	Input Signal	Five connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, one s-video, component video	
	Input Impedance	75 ohms \pm 10%	
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green	

Technical Specifications - Monitors

	Video Cable	VGA to VGA; VGA to DVI-I; DVI-D to DVI-I						
	Video Cable Length	5.9 ft (1.8 m)						
Power	Input Power	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz						
	Frequency	47.5 to 63 Hz						
	Maximum	< 100 W						
	Power Saving	< 5 W						
	Power Cable Length	5.9 ft (1.8 m)						
Mechanical	Dimensions (H x W x D)	<table border="0"> <tr> <td>Unpacked</td> <td>17.36 (min) to 20.9 (max) x 21.46 x 8.27 in (44.1 (min) to 53.1 (max) x 54.5 x 21.0 cm)</td> </tr> <tr> <td>Unpacked without stand (head only)</td> <td>14.57 x 21.46 x 3.35 in (37.0 x 54.5 x 8.5 cm)</td> </tr> <tr> <td>Packaged</td> <td>11.5 x 25.75 x 23.86 in (29.2 x 65.4 x 60.6 cm)</td> </tr> </table>	Unpacked	17.36 (min) to 20.9 (max) x 21.46 x 8.27 in (44.1 (min) to 53.1 (max) x 54.5 x 21.0 cm)	Unpacked without stand (head only)	14.57 x 21.46 x 3.35 in (37.0 x 54.5 x 8.5 cm)	Packaged	11.5 x 25.75 x 23.86 in (29.2 x 65.4 x 60.6 cm)
Unpacked	17.36 (min) to 20.9 (max) x 21.46 x 8.27 in (44.1 (min) to 53.1 (max) x 54.5 x 21.0 cm)							
Unpacked without stand (head only)	14.57 x 21.46 x 3.35 in (37.0 x 54.5 x 8.5 cm)							
Packaged	11.5 x 25.75 x 23.86 in (29.2 x 65.4 x 60.6 cm)							
	Weight	<table border="0"> <tr> <td>Unpacked</td> <td>22.27 lb (10.1 kg)</td> </tr> <tr> <td>Packaged</td> <td>30.87 lb (14.0 kg)</td> </tr> </table>	Unpacked	22.27 lb (10.1 kg)	Packaged	30.87 lb (14.0 kg)		
Unpacked	22.27 lb (10.1 kg)							
Packaged	30.87 lb (14.0 kg)							
	Tilt Range	-5° to + 25° vertical						
	Swivel Range	-35° to + 35°						
	Height Adjustable	Yes, range 3.54 in (9.0 cm)						
	Pivot Rotation	Yes						
	Base	Attached						
Environmental	Temperature – Operating	46° to 95° F (10° to 35° C)						
	Temperature – Non-operating	6° to 140° F (-10° to 60° C)						
	Humidity – Operating	20% to 80% non-condensing						
	Humidity – Non-operating	5% to 85%						
	Altitude – Operating	+12,000 ft (+3,657.6 m)						
	Altitude – Non-operating	+40,000 ft (+12,192 m)						
Options	HP Desktop Access Center	Sold separately, the HP Desktop Access Center Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions; part number DK985A. For more information, refer to the HP Desktop Access Center QuickSpecs.						

Technical Specifications - Monitors

Other	Accessories Included	<p>VGA to VGA cable – connects the graphic card's VGA analog connector to the monitor's input #1 (VGA analog) connector</p> <p>VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #2 (DVI-I analog) connector</p> <p>DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector</p>
	User Guide Languages	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	Warranty Languages	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	Color	Carbonite/silver
	VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)
	Kensington Lock-Ready	Yes
Certification and Compliance		Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Windows Certification (Microsoft Windows 98, Microsoft Windows 2000, and Microsoft Windows XP).
Service and Warranty		Limited three years parts, labor, and on-site service, including backlight. Availability varies by region. Certain restrictions and exclusions apply. Consult HP Customer Service for details.

© Copyright 2005 Hewlett-Packard Development Company, L.P.
The information contained herein is subject to change without notice.

AMD and Opteron are trademarks of Advanced Micro Devices, Inc. Microsoft and Windows are US registered trademarks of Microsoft Corporation. Intel is a trademark of Intel Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.