

HOW TO ORDER REPLACEMENT PARTS

If you encounter any difficulties with this product, or if you need to order replacement parts, contact the ICON Fitness Lifestyle Ltd. office, or write:

ICON Fitness Lifestyle Ltd.
Greenwich House
223 North Street
Sheepscar
West Yorkshire
Leeds LS7 2AA

Tel: Country Code: 0345-089009
Fax: 0113-2411120

To help us assist you, please provide the following information:

- The MODEL NUMBER of the product (WLEVEX11990)
- The NAME of the product (WESLO® PURSUIT 620s exercise cycle)
- The SERIAL NUMBER of the product (see the front cover of this manual)
- The KEY NUMBER and DESCRIPTION of the part(s) (see the PART LIST on page 10 of this manual).


WESLO is a registered trademark of ICON Health & Fitness, Inc.

WESLO PURSUIT 620s

Class HC Fitness Product

Model No. WLEVEX11990
Serial No. _____

Write the serial number in the space above for future reference.

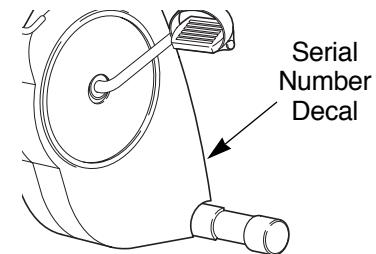

QUESTIONS?

As a manufacturer, we are committed to providing complete customer satisfaction. If you have questions, or find that there are missing or damaged parts, we will guarantee you complete satisfaction through our Customer Service Department.


Please CALL:
0345-089009

Or WRITE:
ICON Fitness Lifestyle Ltd.
Greenwich House
223 North Street
Sheepscar
West Yorkshire
Leeds LS7 2AA

CAUTION

Read all precautions and instructions in this manual before using this equipment. Keep this manual for future reference.

USER'S MANUAL

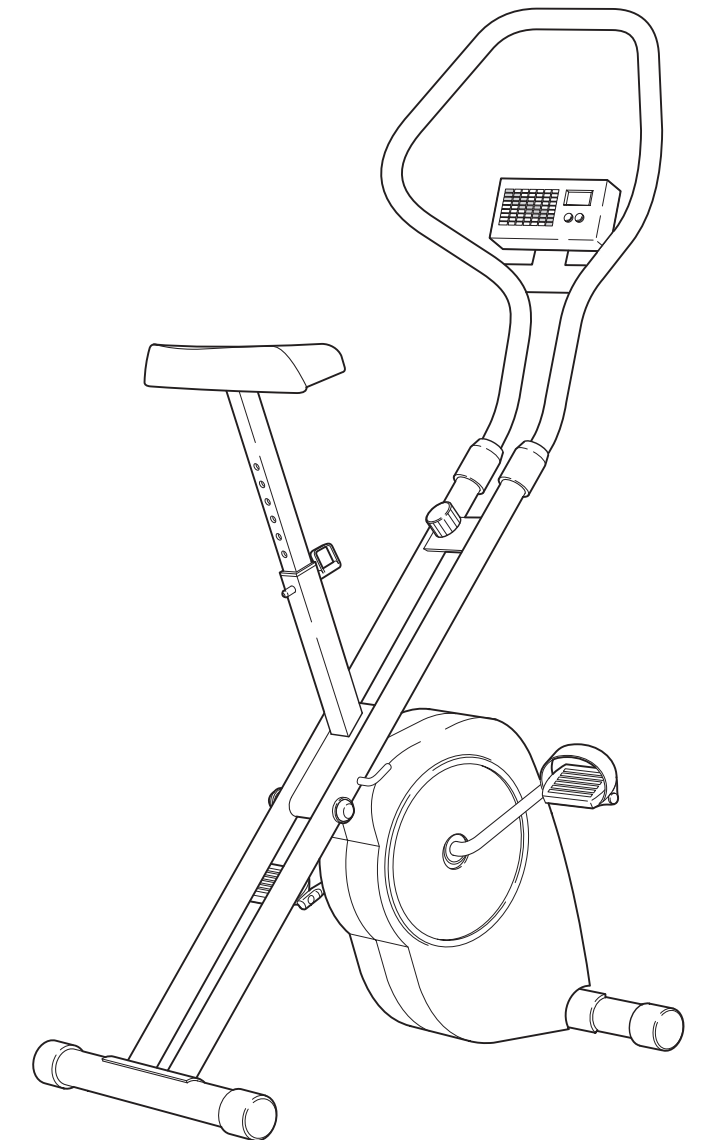

Visit our website at

www.weslo.com


new products, prizes,
fitness tips, and much more!

TABLE OF CONTENTS

IMPORTANT PRECAUTIONS2
 BEFORE YOU BEGIN3
 ASSEMBLY4
 HOW TO USE THE EXERCISE CYCLE6
 STORAGE AND TROUBLE-SHOOTING7
 CONDITIONING GUIDELINES9
 PART LIST10
 EXPLODED DRAWING11
 HOW TO ORDER REPLACEMENT PARTSBack Cover

EXPLODED DRAWING—Model No. WLEVEX11990

R0899A

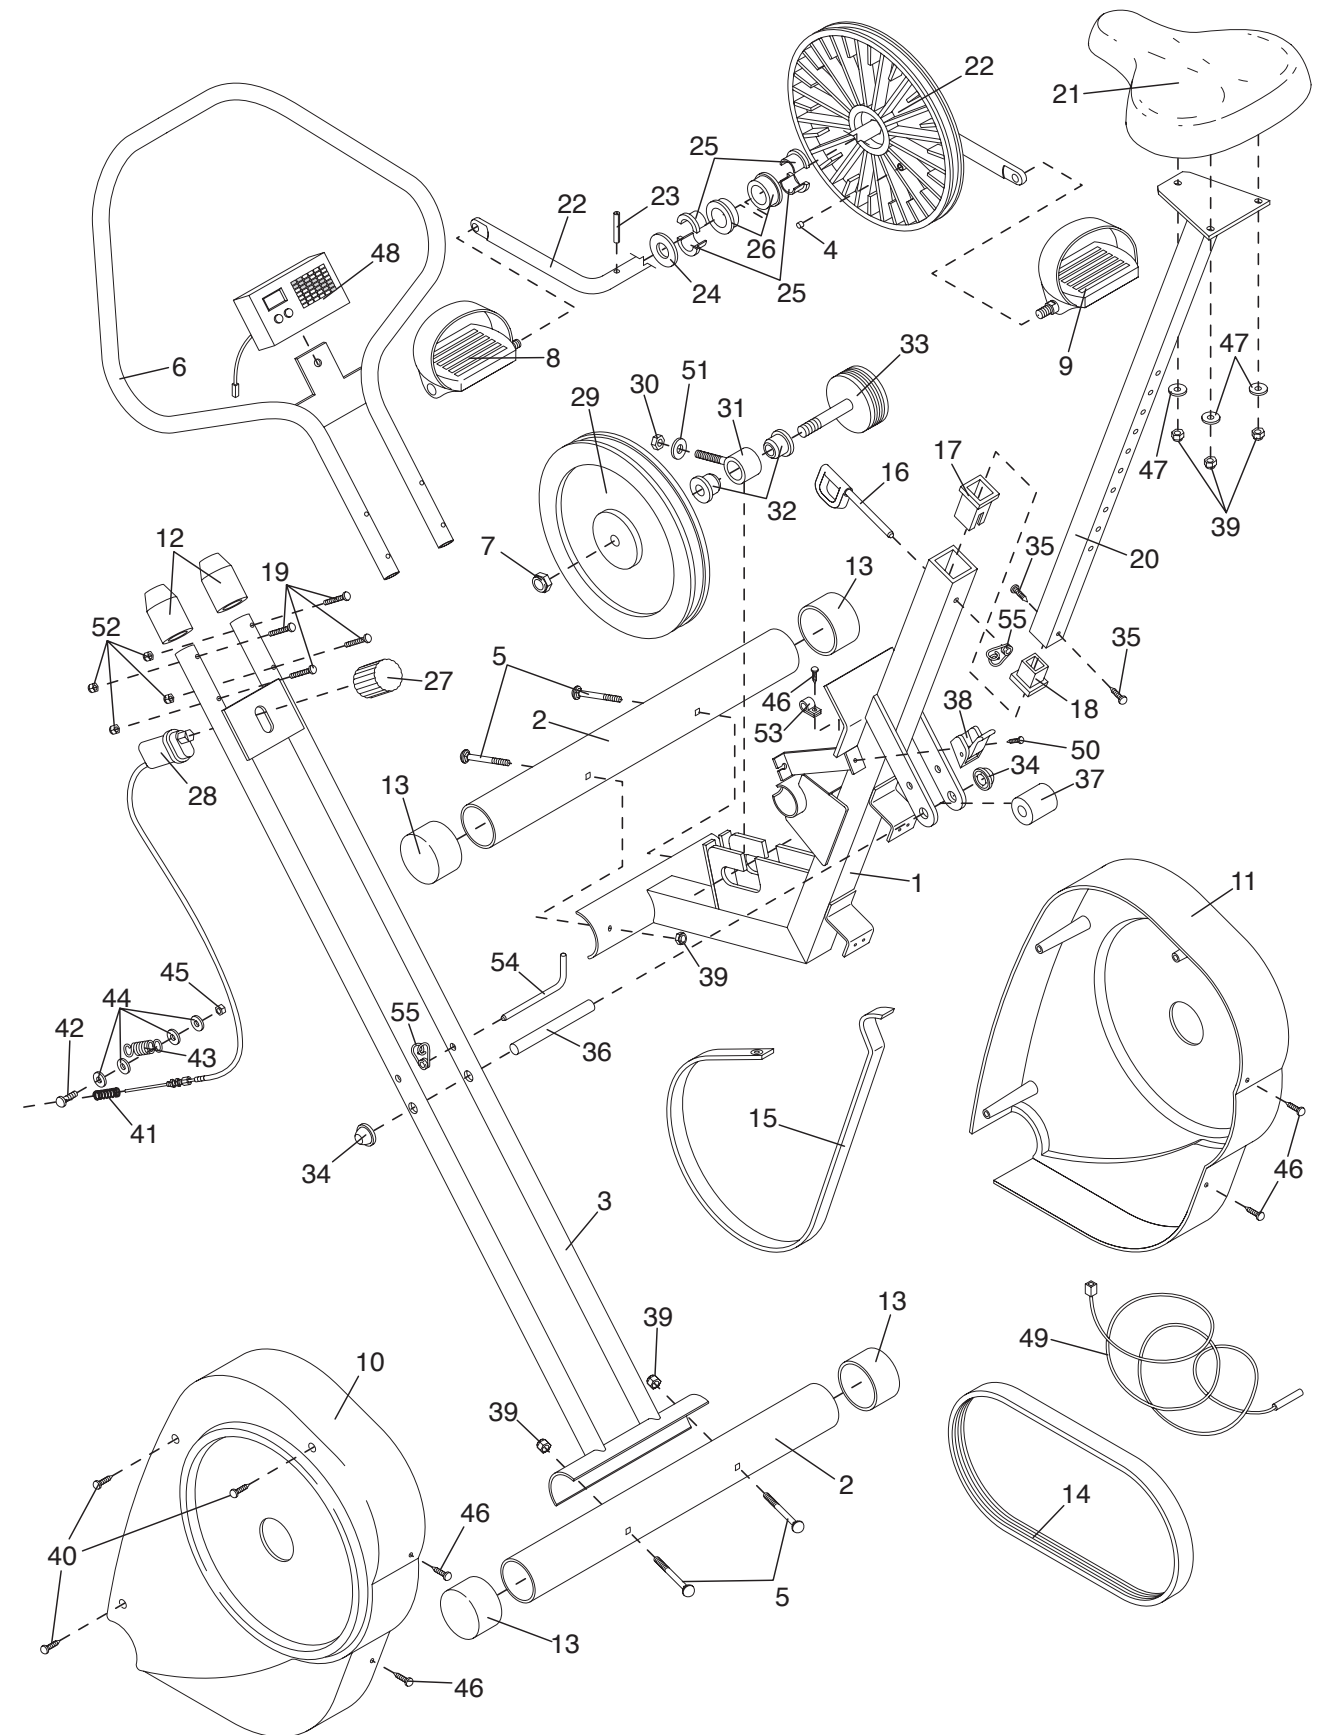

IMPORTANT PRECAUTIONS

WARNING: To reduce the risk of serious injury, read the following important precautions before using the exercise cycle.

1. Read all instructions in this manual before using the exercise cycle. Use the exercise cycle only as described.
2. It is the responsibility of the owner to ensure that all users of the exercise cycle are adequately informed of all precautions.
3. Use the exercise cycle indoors, away from moisture and dust. Place the exercise cycle on a level surface, with a mat beneath it to protect the floor or carpet from damage.
4. Inspect and tighten all parts regularly. Replace any worn parts immediately.
5. Keep children under the age of 12 and pets away from the exercise cycle at all times.
6. The exercise cycle should not be used by persons weighing more than 250 pounds (115 kg).
7. Wear appropriate clothing when exercising; do not wear loose clothing that could become caught on the exercise cycle. Always wear athletic shoes for foot protection.
8. When adjusting the seat, insert the seat pin through one of the holes in the seat post (see the drawing on page 3). Do not insert the seat pin under the seat post.
9. Make sure that the seat pin is inserted into the front of the frame and the seat post. Never insert the seat pin into the back of the frame.
10. Always keep your back straight when using the exercise cycle. Do not arch your back.
11. If you feel pain or dizziness at any time while exercising, stop immediately and begin cooling down.
12. The exercise cycle is intended for in-home use only. Do not use the exercise cycle in a commercial, rental, or institutional setting.

WARNING: Before beginning this or any exercise program, consult your physician. This is especially important for persons over the age of 35 or persons with pre-existing health problems. Read all instructions before using. ICON assumes no responsibility for personal injury or property damage sustained by or through the use of this product.

EXERCISE FREQUENCY

To maintain or improve your condition, plan three workouts each week, with at least one day of rest between workouts. After a few months of regular exercise, you may complete up to five workouts each week, if

desired. **Caution: Be sure to progress at your own pace and avoid overdoing it. Incorrect or excessive training may result in injury to your health.**

Remember, the key to success is make exercise a regular and enjoyable part of your everyday life.

PART LIST—Model No. WLEVEX11990

R0899A

Key No.	Qty.	Description	Key No.	Qty.	Description
1	1	Frame	29	1	Flywheel
2	2	Stabiliser	30	1	M10 Nut
3	1	Scissor Frame	31	1	Adjustment Sleeve
4	1	Magnet	32	2	Flywheel Bushing
5	4	Carriage Bolt	33	1	Flywheel Pulley/Axle
6	1	Handlebar	34	2	Axle Cap
7	1	1/2-13 UNC Nylon Locknut	35	2	M4 x 12mm Screw
8	1	Left Pedal	36	1	Axle
9	1	Right Pedal	37	1	Scissor Spacer
10	1	Left Side Shield	38	1	Strap Clamp
11	1	Right Side Shield	39	7	M8 Locknut
12	2	Handlebar Collar	40	3	Side Shield Screw
13	4	Endcap	41	1	Tension Spring
14	1	Drive Belt	42	1	Clamp Screw
15	1	Resistance Strap	43	1	Resistance Spring
16	1	Seat Pin	44	4	1/4" Washer
17	1	Frame Bushing	45	1	Clamp Nut
18	1	Seat Post Bushing	46	5	M4 x 16mm Screw
19	4	M6 Button Head Bolt	47	3	Seat Washer
20	1	Seat Post	48	1	Console
21	1	Seat	49	1	Reed Switch w/Wire
22	1	Crank/Pulley	50	1	M4 x 16mm Flat Head Screw
23	1	Roll Pin	51	1	M10 Washer
24	1	Crank Washer	52	4	M6 Locknut
25	4	Half Bushing	53	1	Reed Switch Clamp
26	2	Crank Bushing	54	1	"L" Pin
27	1	Resistance Knob	55	2	Spring Clip
28	1	Resistance Control/Cable	#	1	User's Manual

Note: "#" refers to a non-illustrated part. Specifications are subject to change without notice. See the back cover of this manual for information about ordering replacement parts.


BEFORE YOU BEGIN

Thank you for selecting the new WESLO® PURSUIT 620s exercise cycle. The PURSUIT 620s blends advanced engineering with contemporary styling to provide you with a low-impact workout in the convenience and privacy of your own home.




please mention the product model number and serial number when calling. The model number is WLEVEX11990. The serial number can be found on a decal attached to the PURSUIT 620s (see the front cover of this manual for the location of the decal).

For your benefit, read this manual carefully before you use the PURSUIT 620s. If you have additional questions, please call our Customer Service Department at **0345-089009**. To help us assist you,

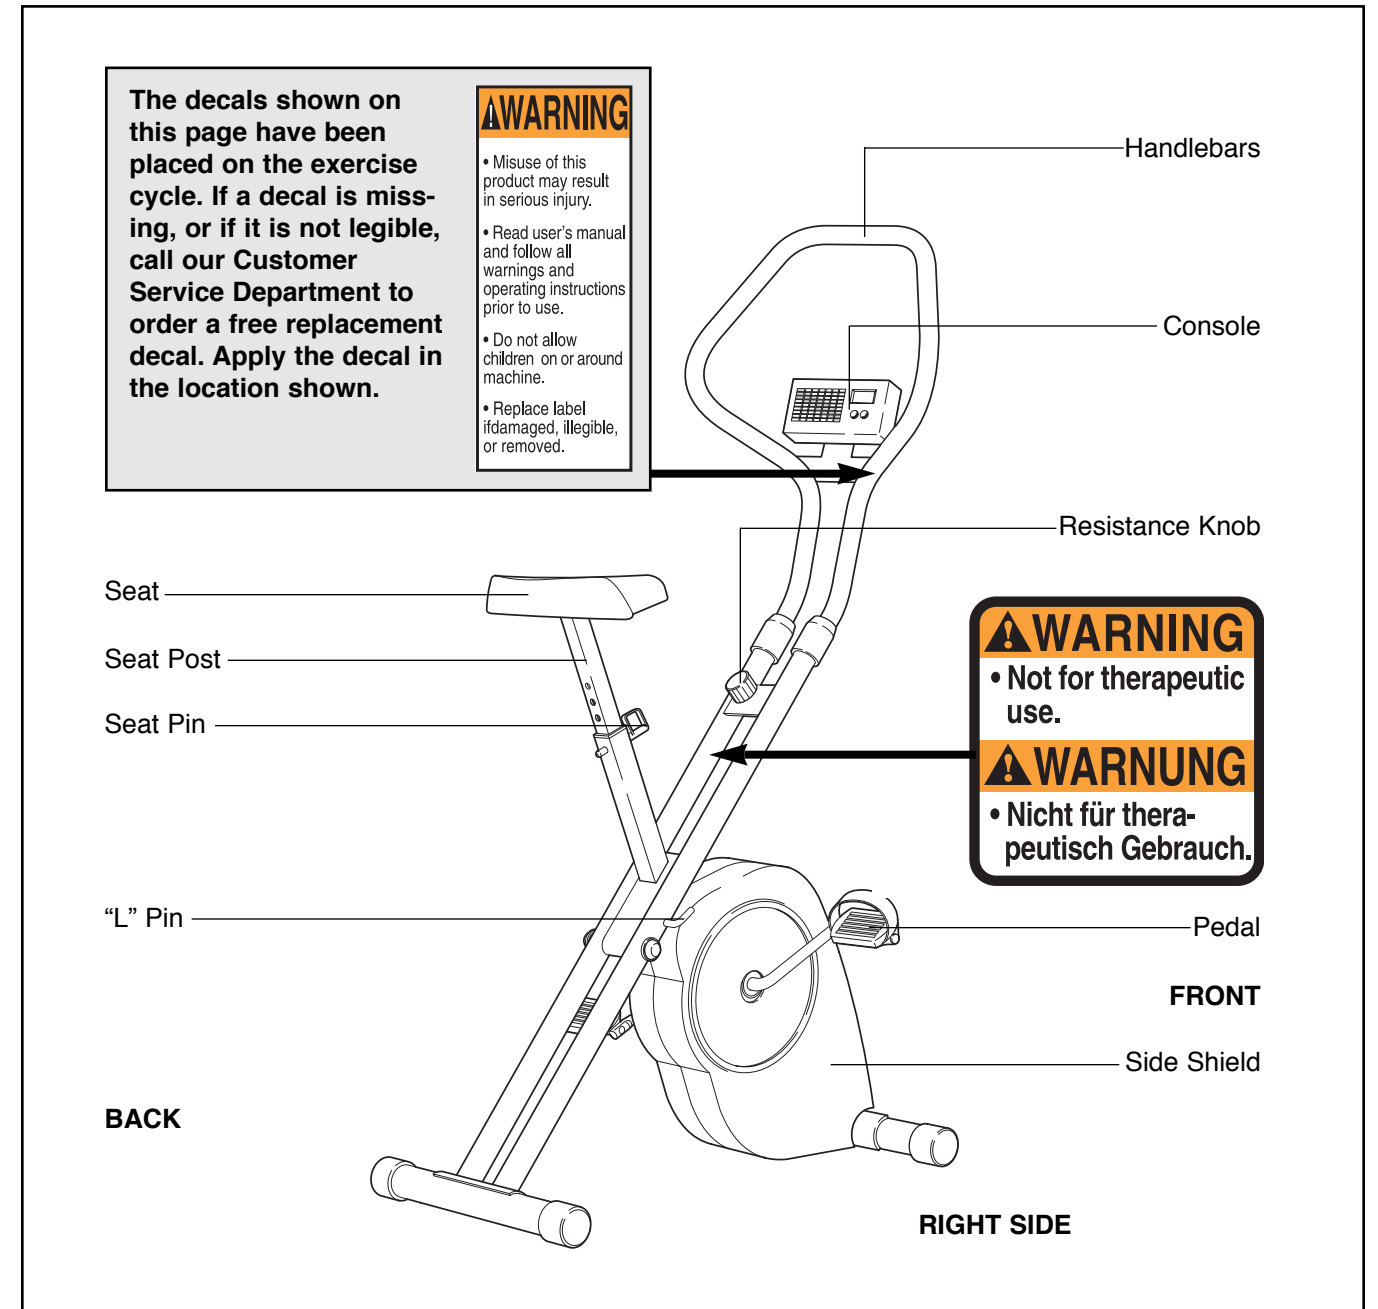Before reading further, please look at the drawing below and familiarise yourself with the parts that are labelled.




ASSEMBLY


Place all parts of the exercise cycle in a cleared area and remove the packing materials. Do not dispose of the packing materials until assembly is completed. **Assembly requires the included allen wrench** , **a phillips screwdriver** , and **two adjustable wrenches** .

1. Pivot the Scissor Frame (3) and the Frame (1) to the position shown. Insert the "L" Pin (54) into the indicated holes in the Scissor Frame and the Frame and secure it with a Spring Clip (55) (see the inset drawing).

Hold one of the Stabilisers (2) against the saddle on the Frame (1), with the square holes facing away from the saddle. Attach the Stabiliser with two Carriage Bolts (5) and two M8 Locknuts (39).

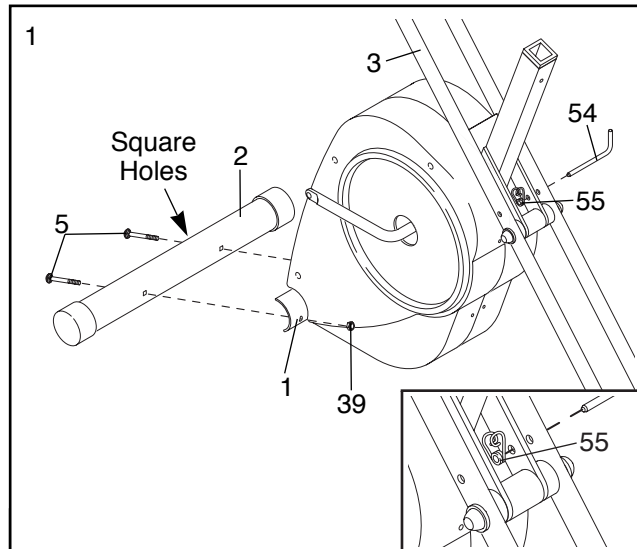


2. Hold the other Stabiliser (2) against the saddle on the Scissor Frame (3), with the square holes facing away from the saddle. Attach the Stabiliser with two Carriage Bolts (5) and two M8 Locknuts (39).

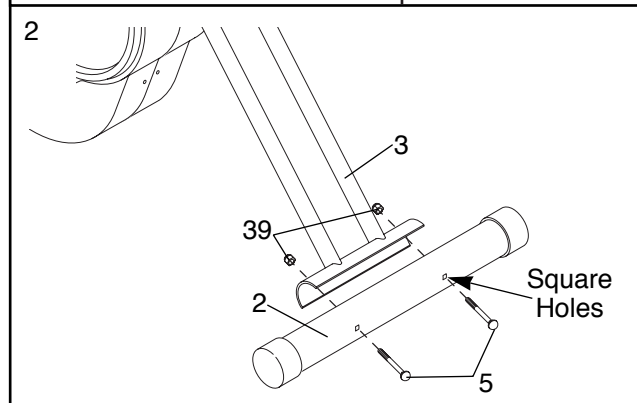

3. Insert the Seat Post (20) into the Frame (1). Align one of the holes in the Seat Post with the hole in the Frame. Insert the Seat Pin (16) through the Frame and the Seat Post to select the desired seat height. Secure the Seat Pin with a Spring Clip (55). **Make sure to insert the Seat Pin through one of the holes in the Seat Post; do not insert the Seat Pin under the Seat Post.**

Next, attach the Seat (21) to the Seat Post (20) with three Seat Washers (47) and three M8 Locknuts (39). Note: The Seat Washers and Locknuts may be pre-attached to the bottom of the Seat.

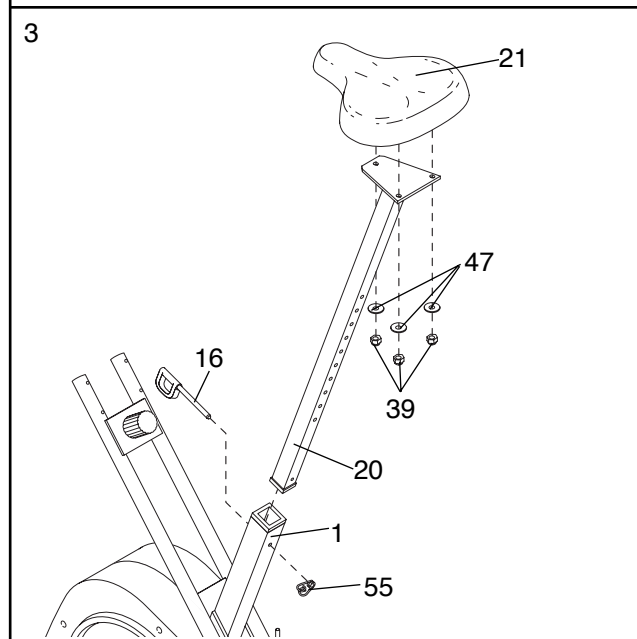

CONDITIONING GUIDELINES

The following guidelines will help you to plan your exercise program. Remember that proper nutrition and adequate rest are essential for successful results.

WARNING: Before beginning this or any exercise program, consult your physician. This is especially important for persons over the age of 35 or persons with pre-existing health problems.

EXERCISE INTENSITY

Whether your goal is to burn fat or to strengthen your cardiovascular system, the key to achieving the desired results is to exercise with the proper intensity. The proper intensity level can be found by using your heart rate as a guide. The chart below shows recommended heart rates for fat burning, maximum fat burning, and cardiovascular (aerobic) exercise.

BPM	HEART RATE TRAINING ZONES						
165							Aerobic
145	155						Max Fat Burn
125	138	145					Fat Burn
	120	130	140				
		115	125	130			
			110	118	125		
				105	110	115	
					95	103	
90							
Age	20	30	40	50	60	70	80

To find the proper heart rate for you, first find your age near the bottom of the chart (ages are rounded off to the nearest ten years). Next, find the three numbers above your age. The three numbers are your "training zone." The lowest number is the recommended heart rate for fat burning; the middle number is the heart rate for maximum fat burning; the highest number is the heart rate for aerobic exercise.

Burning Fat

To burn fat effectively, you must exercise at a relatively low intensity level for a sustained period of time. During the first few minutes of exercise, your body uses easily accessible carbohydrate calories for energy. Only after the first few minutes of exercise does your body begin to use stored fat calories for energy. If your goal is to burn fat, adjust the intensity of your

exercise until your heart rate is near the lowest number in your training zone as you exercise.


For maximum fat burning, adjust the intensity of your exercise until your heart rate is near the middle number in your training zone as you exercise.

Aerobic Exercise

If your goal is to strengthen your cardiovascular system, your exercise must be "aerobic." Aerobic exercise is activity that requires large amounts of oxygen for prolonged periods of time. This increases the demand on the heart to pump blood to the muscles, and on the lungs to oxygenate the blood. For aerobic exercise, adjust the intensity of your exercise until your heart rate is near the highest number in your training zone.

HOW TO MEASURE YOUR HEART RATE

To measure your heart rate, first exercise for at least four minutes. Then, stop exercising and place two fingers on your wrist as shown. Take a six-second heartbeat count, and multiply the result by 10 to find your heart rate. For example, if your six-second heartbeat count is 14, your heart rate is 140 beats per minute. (A six-second count is used because your heart rate will drop rapidly when you stop exercising.)

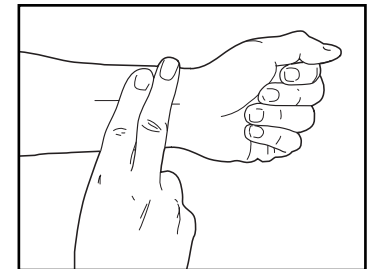

WORKOUT GUIDELINES


Each workout should include the following three parts:

A warm-up, consisting of 5 to 10 minutes of stretching and light exercise. A proper warm-up increases your body temperature, heart rate, and circulation in preparation for exercise.

Training zone exercise, consisting of 20 to 30 minutes of exercising with your heart rate in your training zone. (During the first few weeks of your exercise program, do not keep your heart rate in your training zone for longer than 20 minutes.)

A cool-down, with 5 to 10 minutes of stretching. This will increase the flexibility of your muscles and will help to prevent post-exercise problems.


Next, locate the Reed Switch (49). Turn the Crank (22) until the Magnet (4) is aligned with the Reed Switch. Loosen but do not remove the M4 x 16mm Screw (46). Slide the Reed Switch slightly closer to or away from the Magnet. Retighten the Screw. Turn the Crank for a moment. Repeat until the console displays correct feedback. When the Reed Switch is correctly adjusted, re-attach the left side shield and pedal.

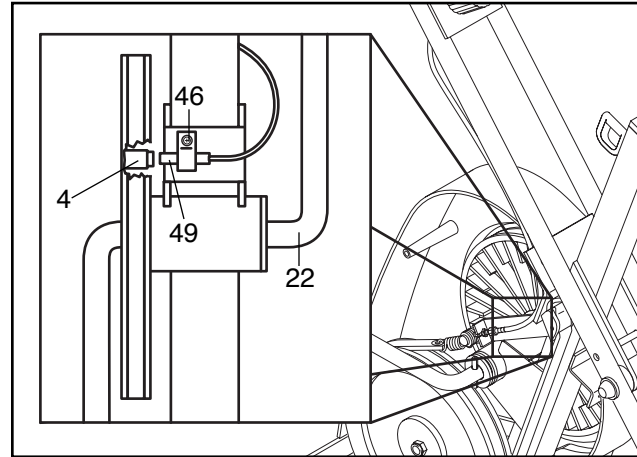

HOW TO ADJUST THE RESISTANCE STRAP

If there is not enough pedalling resistance when the resistance knob is turned to the highest setting, the Resistance Strap (15) may need to be adjusted. To adjust the Resistance Strap, the left side shield must first be removed. Refer to the instructions on page 7 and remove the left side shield.


Next, turn the resistance knob to the lowest setting. Locate and open the Strap Clamp (38). Grip the end of the Resistance Strap (15) and pull it up slightly. While holding the end of the Resistance Strap, **fully** close the Strap Clamp. Turn the Crank (22) for a moment to make sure that there is not too much resistance. When the Resistance Strap is properly adjusted, re-attach the left side shield and pedal.

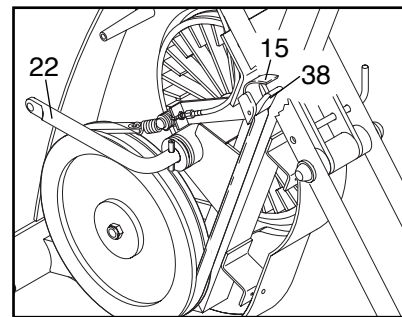


HOW TO ADJUST THE DRIVE BELT

The exercise cycle features a drive belt that must be kept properly adjusted. If the belt causes excessive noise or slips as you pedal, the belt should be checked. To do this, the side shields must first be removed. Refer to the instructions on page 7 and remove the left side shield. Next, remove the right side shield in the same way.


Press down on the centre of the Drive Belt (14) between the front and rear pulleys. **There should be from 6mm to 13mm of movement in the centre of the Belt.**

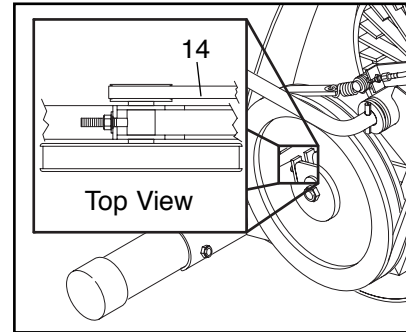


If the Drive Belt (14) is properly adjusted, re-attach the side shields and pedals. If the Belt needs to be adjusted, loosen the Nylon Locknut (7) on the left side of the Flywheel (29). To tighten the Belt, turn the M10 Nut (30) clockwise; to loosen the Belt, turn the M10 Nut counterclockwise. Make sure that the Flywheel is straight and tighten the Nylon Locknut (7). Re-attach the side shields and pedals.

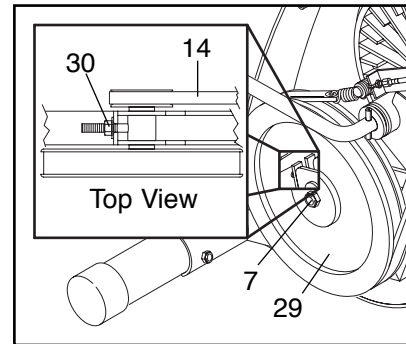

4. Slide the Handlebar Collars (12) onto the Handlebars (6). Attach the Handlebars to the Scissor Frame (3) with four M6 Button Head Bolts (19) and four M6 Locknuts (52). Next, slide the Handlebar Collars over the Button Head Bolts.

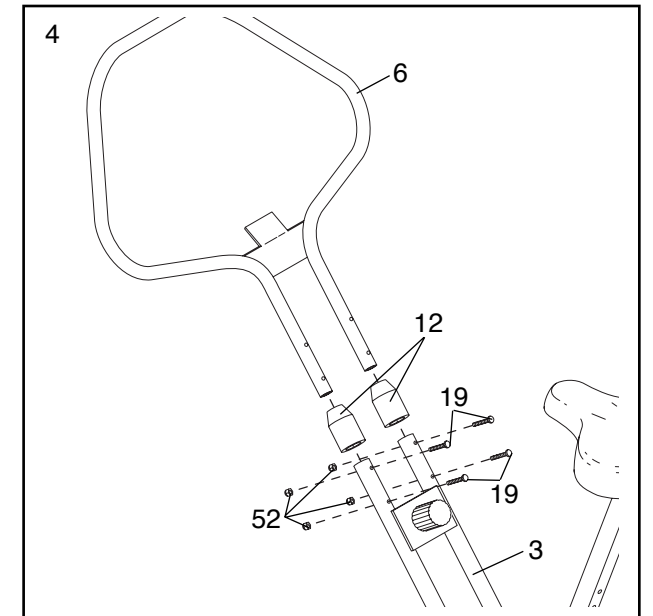

5. The Console (48) requires two 1.5V batteries (not included). Alkaline batteries are recommended. Refer to the inset drawing. Remove the battery door from the Console. Press two batteries into the battery compartment. **Make sure that the negative ends of the batteries (marked “-”) are touching the springs in the battery compartment.** Re-attach the battery door.

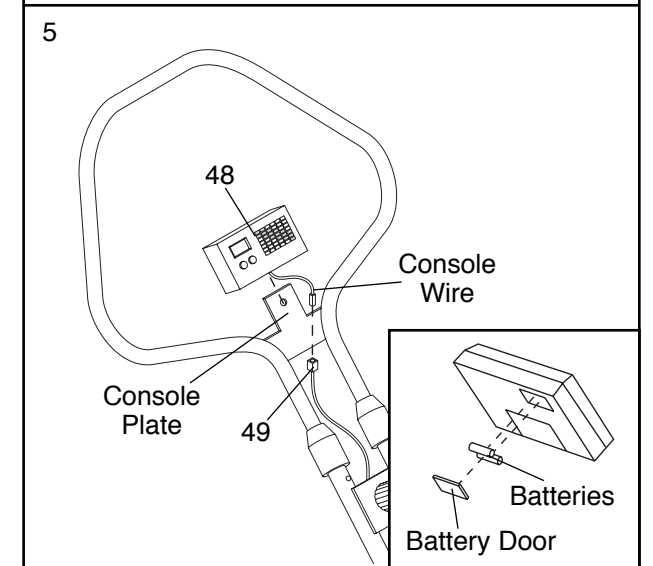


Connect the console wire to the Reed Switch Wire (49).

Slide the Console (48) onto the console plate. Make sure that the plastic clip on the back of the Console snaps into the tab on the console plate.

Note: The console on your exercise cycle may not look like the one pictured, but it will function the same way.

6. Identify the Left Pedal (8). (The Left Pedal is marked with an “L.”) Using an adjustable wrench, tighten the Left Pedal counterclockwise into the left arm of the Crank (22).

Tighten the Right Pedal (not shown) clockwise into the right arm on the Crank.

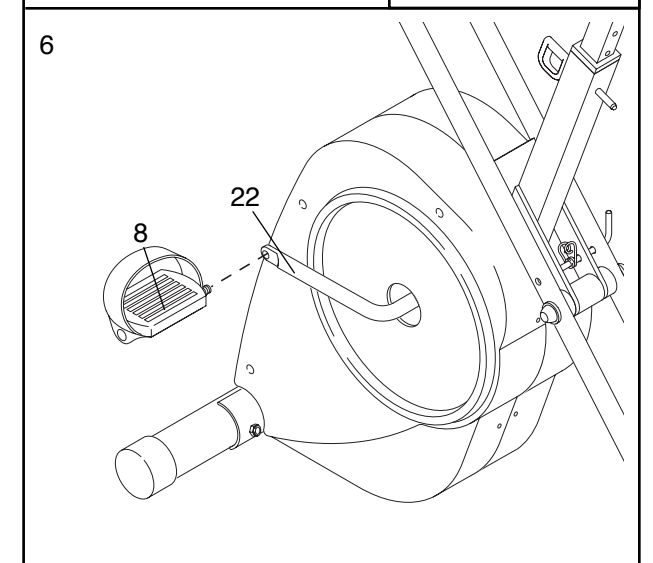


7. **Make sure that all parts are properly tightened before you use the exercise cycle.** Place a mat under the exercise cycle to protect the floor or carpet. Note: Some hardware may be left over after assembly is completed.

HOW TO USE THE EXERCISE CYCLE

HOW TO ADJUST THE SEAT


For effective exercise, the Seat (21) should be at the proper height. As you pedal, there should be a slight bend in your knees when the pedals are in the lowest position. To adjust the Seat, first hold the Seat and

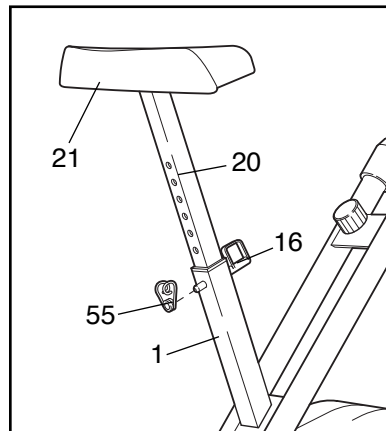

remove the Seat Pin (16). Align one of the holes in the Seat Post (20) with the hole in the Frame (1). Insert the Seat Pin into the Frame and the Seat Post. Secure the Seat Pin with a Spring Clip (55). **Caution: Make sure to insert the Seat Pin through one of the holes in the Seat Post; do not insert the Seat Pin under the Seat Post. In addition, make sure that the Seat Pin is inserted into the front of the Frame and the Seat Post as shown above.**

HOW TO ADJUST THE PEDALLING RESISTANCE

To vary the intensity of your exercise, the pedalling resistance can be adjusted. The resistance is controlled with the Resistance Knob (27). To increase the resistance, turn the Resistance Knob clockwise; to decrease the resistance, turn the Resistance Knob counterclockwise.

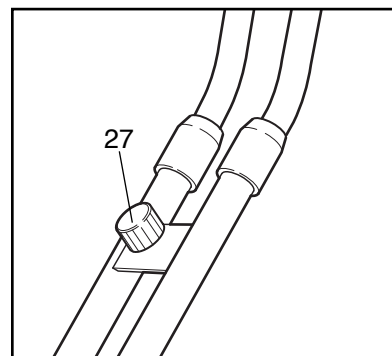

BATTERY INSTALLATION


Before the console can be operated, two 1.5V batteries must be installed. If you have not installed batteries, see assembly step 5 on page 5.

DESCRIPTION OF THE CONSOLE

The console features five modes that provide instant exercise feedback during your workouts. The modes are described at the right.

Note: The console on your exercise cycle may not look like the one pictured in this section, but it will function the same way.


- **SPEED**—Displays your pedalling speed in revolutions per minute (RPM).
- **TIME**—Displays the elapsed time. Note: If you stop pedalling for ten seconds or longer, the time mode will pause until you resume.
- **DIST**—Displays the total revolutions.
- **CAL**—Displays the approximate number of calories you have burned.
- **SCAN**—Displays the speed, time, distance, and calorie modes, for 5 seconds each, in a repeating cycle.

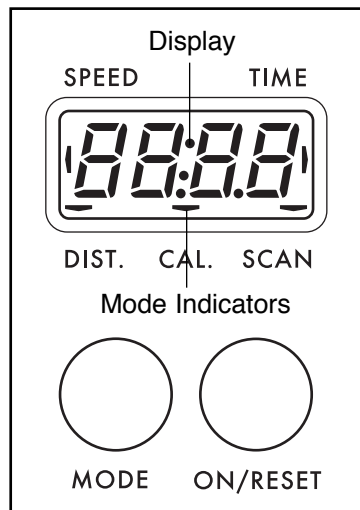


HOW TO OPERATE THE CONSOLE

1. To turn on the power, press the on/reset button or simply begin pedalling. When the power is turned on, the entire display will appear for two seconds. The console will then be ready for operation.
2. Select one of the five modes:

Scan mode—When the power is turned on, the scan mode will automatically be selected. One mode indicator will show that the scan mode is selected, and a flashing mode indicator will show which mode is currently displayed. Note: If a different mode is selected, you can select the scan mode again by repeatedly pressing the mode button.

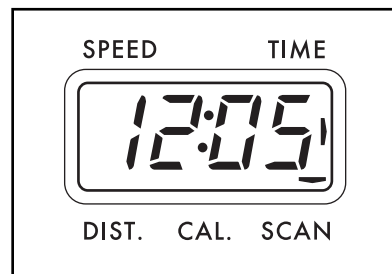

Speed, time, distance or calorie mode—To select one of these modes for continuous display, press the mode button repeatedly. The mode indicators will show which mode is selected. Make sure that the scan mode is not selected.

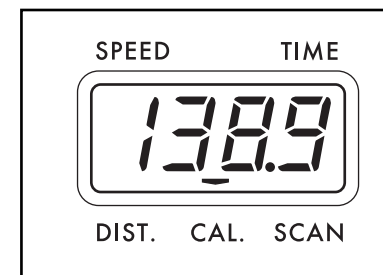

3. To reset the display, press the on/reset button.
4. To turn off the power, simply wait for about four minutes. **Note: The monitor has an “auto-off” feature. If the pedals are not moved and the monitor buttons are not pressed for four minutes, the power will turn off automatically in order to conserve the batteries.**


STORAGE AND TROUBLE-SHOOTING

Inspect and tighten all parts of the exercise cycle regularly. Replace any worn parts immediately.

The exercise cycle can be cleaned with a soft, damp cloth. Avoid spilling liquid on the console. Keep the console out of direct sunlight or the display may be damaged. Remove the batteries when storing the exercise cycle.

HOW TO STORE THE EXERCISE CYCLE

When the exercise cycle is not in use, it can be folded for compact storage. Remove the Spring Clip (55) and pull out the “L” Pin (54). Fold the exercise cycle by bringing the seat and handlebars toward one another. Store the exercise cycle indoors, away from moisture and dust.

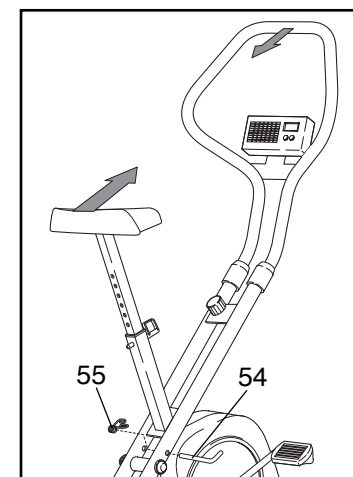


BATTERY REPLACEMENT

If the console does not function properly, the batteries should be replaced. See assembly step 5 on page 5. In addition, make sure that the console wire is connected to the reed switch.

HOW TO ADJUST THE REED SWITCH

If the console does not display correct feedback, the reed switch should be adjusted. In order to adjust the reed switch, the Left Side Shield (10) must be removed.

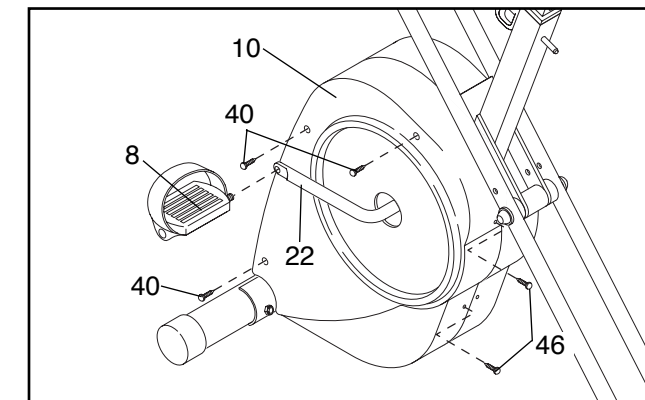

Using an adjustable wrench, turn the Left Pedal (8) clockwise and remove it from the Crank (22). Remove the three Side Shield Screws (40) and the two M4 x 16mm Screws (46) from the Left Side Shield. Make sure that the arm of the Crank is in the position shown in the drawing above. Carefully slide the Left Side Shield forward off the arm of the Crank and remove it.