



Bottom Mount Refrigerator

PRODUCT MODEL NUMBERS

GB2SHDXT	GX5FHTXT
GB2SHTXT	GX5SHDXT
GX5FHDXT	GX5SHTXT


Electrical: A 115 Volt, 60 Hz., AC only 15 or 20 amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: Connect the ice maker to a cold water line with water pressure between 35 and 100 psi (241-689 kPa).

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the system needs to be a minimum of approximately 60 psi (414 kPa).


IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 100 psi (241 - 689 kPa).

OVERALL DIMENSIONS

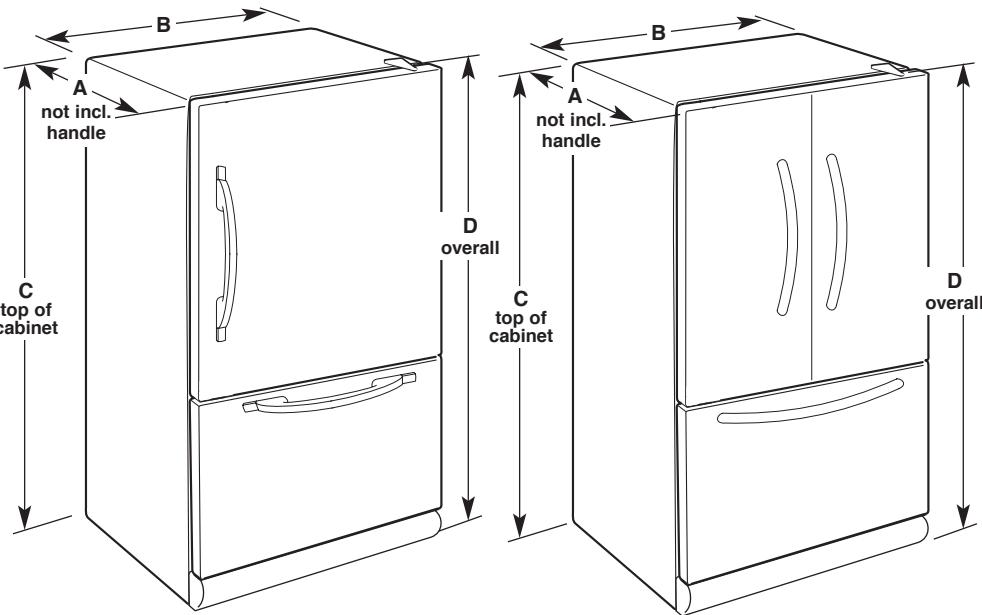

Model #	Depth "A"	Cab. Width "B"	Cab. Height "C"	Overall Height "D"
GB2SHDXT	30 7/8"	32 5/8"	68 1/2"	69 3/4"
GB2SHTXT	30 7/8"	32 5/8"	68 1/2"	69 3/4"
GX5FHDXT	31 3/4"	35 5/8"	68 1/2"	69 7/8"
GX5FHTXT	31 3/4"	35 5/8"	68 1/2"	69 7/8"
GX5SHDXT	31 3/4"	35 5/8"	68 1/2"	69 7/8"
GX5SHTXT	31 3/4"	35 5/8"	68 1/2"	69 7/8"

LOCATION REQUIREMENTS

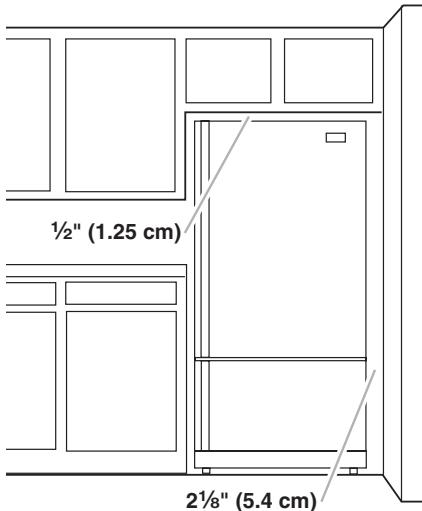

To ensure proper ventilation for your refrigerator, allow for 1/2" (1.25 cm) space on each side, at the top and behind the refrigerator. When installing your refrigerator next to a fixed wall, leave 2 1/8" (5.4 cm) minimum on each side (depending on your model) to allow for the door to swing open. If your refrigerator has an ice maker, allow extra space at the back for the water line connections.

NOTE: Do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 55°F (13°C).