

ACCESSORY PACK

- (1) 18' CDX Cable (13-Pin DIN)
- (4) Mounting Screws (m5 x 0.8mm x 6mm)
- (4) Self Tapping Screws
- (1) Right Mounting Bracket
- (1) Left Mounting Bracket

INSTALLATION CONSIDERATIONS

1. Carefully read and understand the instructions before attempting to install the CD Changer.
2. **For safety**, disconnect the negative lead from the battery prior to beginning the installation.
3. For easier assembly, we suggest you run the CDX cable prior to mounting your CD Changer in place.
4. Route the CDX cable away from any high current wires to prevent coupling noise from radiated electrical fields into the audio signal.
5. **Think before your drill!** Be careful not to cut or drill into gas tanks, fuel lines, brake or hydraulic lines, vacuum lines or electrical wiring when working on any vehicle.
6. Never run the cable underneath the vehicle. Running the cable inside the vehicle provides the best protection.
7. Avoid running the cable over or through sharp edges. Use rubber or plastic grommets to protect any cable routed through metal.

WIRING THE SYSTEM


1. **Install the CDX cable** in the vehicle. Leave enough slack in the cable for the connection of the source unit and the CD Changer.
2. **Determine the Mounting Area** for the CD Changer which allows operation of the CD Changer door without interference. Be careful not to mount the CD Changer on cardboard or plastic panels. Doing so may enable the screws to pull out from the panel due to road vibrations or sudden vehicle stops.
3. **Adjust the V-H Screw** on the CD Changer by determining the mounting angle for the adjustable suspension.
4. **Install the Mounting Brackets** securely to the vehicle with the supplied self-tapping screws.
5. **Install the CD Changer** securely to the mounting brackets with the supplied mounting screws.
6. **Connect the CDX cable** by plugging one end into the 13-Pin DIN located on the rear of the source unit and the other end into the 13-Pin DIN located on the rear of the CD Changer.

ATTENTION: To maintain your warranty, we recommend your Authorized Rockford Fosgate Dealer install your CD Changer.







INSTALLING THE RFX-8601

Adjustable Suspension Configurations

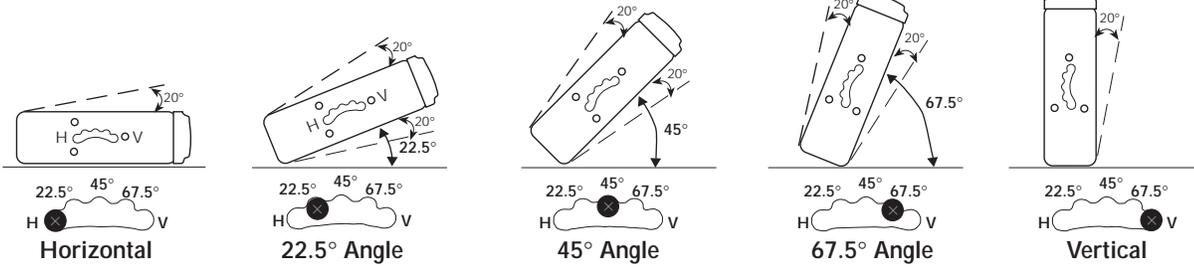

Mounting Bracket Configurations

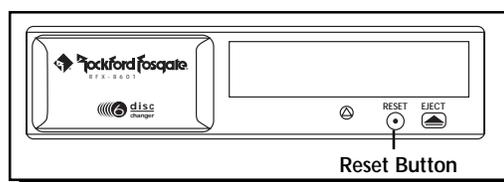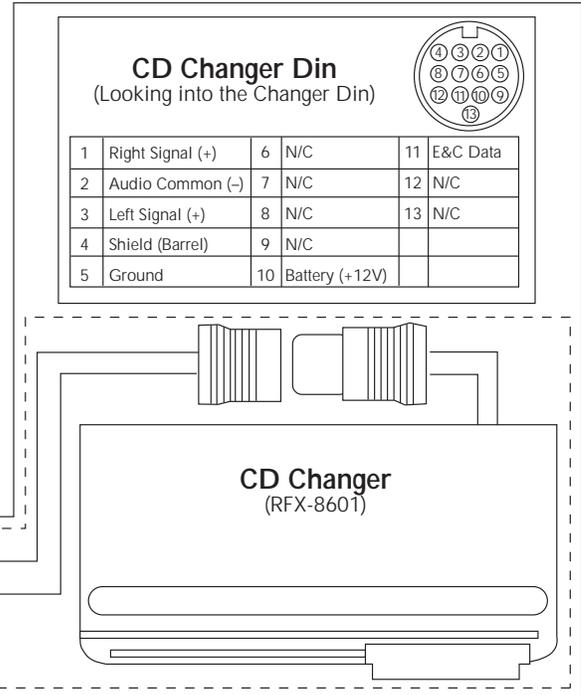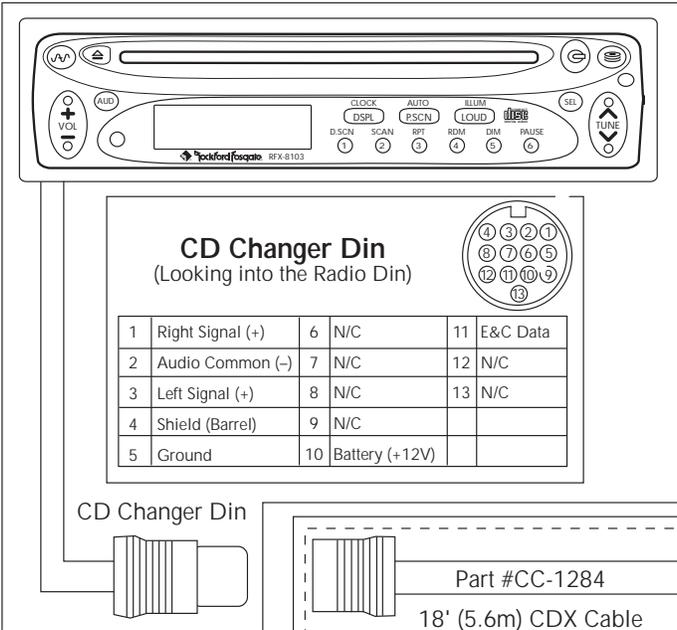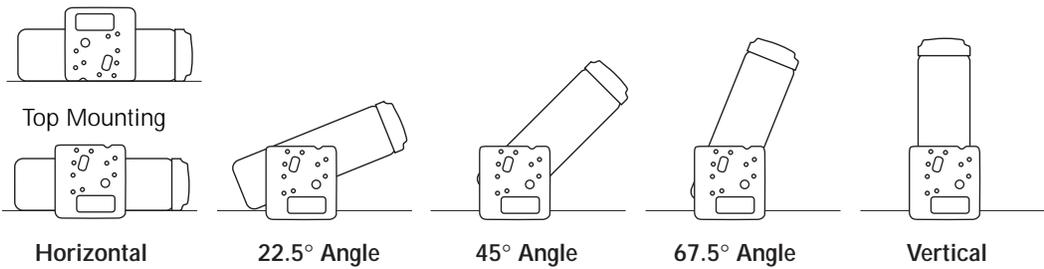

ATTENTION: To maintain your warranty, we recommend your Authorized Rockford Fosgate Dealer install your CD Changer.