

CHANNEL VISION™
10 Year Limited Warranty

Channel Vision Technology will repair or replace any defect in material or workmanship which occurs during normal use of this product with new or rebuilt parts, free of charge in the USA, for ten years from the date of original purchase. This is a no hassle warranty with no mail in warranty card needed. This warranty does not cover damages in shipment, failures caused by other products not supplied by Channel Vision Technology, or failures due to accident, misuse, abuse, or alteration of the equipment. This warranty is extended only to the original purchaser, and a purchase receipt, invoice, or other proof of original purchase date will be required before warranty repairs are provided.

Mail in service can be obtained during the warranty period by calling (800) 840-0288 toll free. A Return Authorization number must be obtained in advance and can be marked on the outside of the shipping carton.


This warranty gives you specific legal rights and you may have other rights (which vary from state to state). If a problem with this product develops during or after the warranty period, please contact Channel Vision Technology, your dealer or any factory-authorized service center.

CHANNEL VISION™
channelvision.com

234 Fischer Avenue, Costa Mesa, California 92626
(714)424-6500 • (800)840-0288 • (714)424-6510 fax

500-074 revD

INSTRUCTIONS

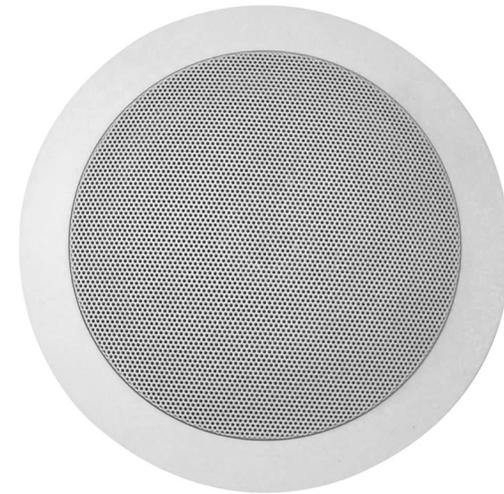


IC503
5.25" IN-CEILING SPEAKER

ARIA
BY **CHANNEL VISION™**

©2007 CHANNEL VISION TECHNOLOGY

Model IC503

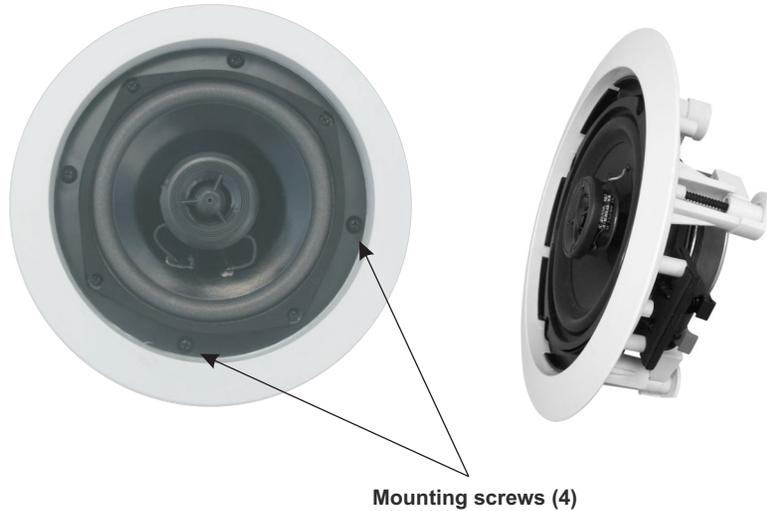

Installation:

- Use the provided template to mark and cut a 6½" hole in drywall away from ceiling joists.
- We recommend wiring with AWG 16 or larger, stranded wire.
- For proper phasing, both voice coils must be wired alike. Connect red wires to red terminals on speaker and to red or plus terminals on amplifier.
- Install IC503 in the hole. Tighten the mounting screws. The mounting dog ears will rotate outward and grip the drywall.
- To control the volume of the speaker locally, use an impedance matching volume control, such as the Channel Vision VC-302.

Features:

Cost Effective

Easy to install

5.25" High performance in-ceiling loudspeaker

Mica-filled polypropylene woofer with butyl rubber surround

Small perforated designer grille

Recommended power: 50W (peak)

Pre-construction brackets sold separately (model IC52B)

Specifications:

Frequency range: 55Hz - 20kHz ± 3dB

Power Handling: 50 Watts

Drivers:
1- .5" Mylar tweeter
1- 5.25" polypropylene woofer

Impedance: 8 ohms

Finish: ABS plastic

Dimensions: 8" OD. 3" Deep
(Depth from surface of wall board)

Specifications subject to change without notice.