

PCAU33

2x75W Max Stereo Power Amplifier with USB Input



www.pyleaudio.com

PORTANT SAFETY INSTRUCTIONS

- 1. Read Instructions All the safety and operating instructions should be read before the appliance is operated.
- 2. Retain Instructions The safety and operating instructions should be retained for future reference.
- 3. Heed Warnings All warnings on the appliance and in the operating instructions should be adhered to.
- **4. Follow Instructions** All operang and use instructions should be followed.
- 5. Water and Moisture The appliance should not be used near water -for example, near a bathtub, washbowl, kitchen sink, laundry tub, swimming pool, or a wet basement.
- 6. Ventilation The appliance should be situated so that its location or position does not interfere with its proper ventilation. For example, the appliance should not be situated on a bed, sofa, rug, or similar surface that may block the ventilation openings: or placed in a built-in installation, such as a bookcase or cabinet that may impede the flow of air through the ventilation openings.
- 7. Heat The appliance should be situated away from heat sources such as radiators, heat registers, stoves, or other appliances (including amplifiers) that produce heat.
- 8. Power Sources The appliance should be connected to a power supply only of the type described in the operating instructions or as marked on the appliance.
- 9. Grounding or Polarization Precaution should be taken to insure that the grounding or polarization means of an appliance is not defeated.
- 10. Power-Cord Protection Power supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them, paying particular attention to cords at plugs, convenience receptacles, and the point at which they exit from the appliance.
- 11. Cleaning The appliance should be cleaned only as recommended by the manufacturer.
- 12. Power Lines An outside antenna system should not be located in the vicinity of overhead power lines or other electric light or power circuits, or where it can fall into such power lines or circuits. When installing an outside antenna system, extreme care should be taken to keep from touching such power lines or circuits as contact with them might be fatal.
- **13. Nonuse Periods** The power cord of the appliance should be unplugged from the outlet when the appliance is to be left unused for a long period of time.
- 14. Object and Liquid Entry Care should be taken so that objects do not fall and liquids are not spilled into the enclosure through openings.
- 15. Carts and Stands If the appliance is used with a cart or stand, the cart or stand should be a type recommended by the manufacturer.


An appliance and cart combination should be moved with care. Quick stops, excessive force, and uneven surfaces cause the appliance and cart combination to overturn.

- **16. Mounting** The appliance should be mounted only as recommended by the manufacturer.
- 17. Damage Requiring Service The appliance should be serviced by qualified service personnel when:

 A. The power-supply cord or plug has been damaged.
 B. Objects have fallen into, or liquid has been spilled into the appliance enclosure.

C. The appliance has been exposed to rain.

- D. The appliance has been dropped, or the enclosure damaged.
- E. The appliance does not appear to operate normally or exhibits a marked change in performance.
- 18. Servicing The user should not attempt to service the appliance beyond that described in the user's operating instructions. All other servicing should be referred to qualified personnel.
- 19. Overloading Do not overload wall outlets and extension cords as this can result in a risk of fire or electric shock.
- 20. Replacement Parts When replacement parts are required, be sure the service technician has used replacement parts specified by the manufacturer or have the same characteristics as the original part. Unauthorized substitutions may result in fire, electric shock or other hazards.
- 21. Safety Check Upon completion of any service or repairs to this appliance, ask the service technician to perform safety checks to determine that the appliance is in proper operating condition.





Your new Pyle Pro PCAU33 Stereo Power Amplifier

gives you the power and versatility you need in a professional sound system. Its wide frequency response make it suitable for amplifying music or vocal program material.

The front located USB 2.0 interface allows you to connect the input of your MP3 devices conveniently. It can be used for meeting halls, house, restaurant, school, stores, live bands, or office.

FEATURES AND CONTROLS

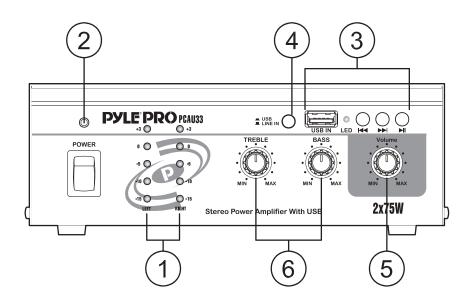

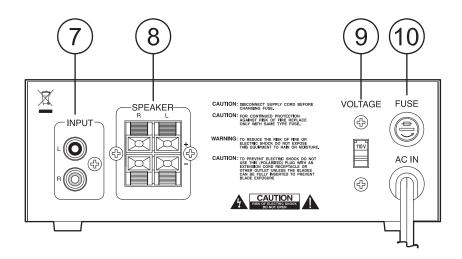

FEATURES AND CONTROLS

(1)Blue LED Output Level Display

(2)Power On/Off and LED Indicator

Main power switch, the indicator lights when the amplifier is turned on.

(3)USB 2.0 Input Interface with LED Indicator

Press ◄ to play the last song backward, press ▶ to play the next song forward, and press ► to play and/or pause the song. When the song is ceased from playing, it will be memorized to resume once the amplifier is reactivated and/or the USB input is selected again.

(4)USB/LINE Input Selector

Press in to select the USB input and press up for the LINE input. When it is switched to LINE input while the USB is still on playing, the playing signal of USB continues, just it is not sent to the amplifier's output.

(5)MASTER Volume Control

Lets you control the overall volume level.

(6)BASS and TREBLE Controls

Allows you to boost or attenuate bass and treble for the desired sound.

(7)LINE RCA Input

Lets you connect most high level audio sources such as CD player, tape deck, tuner, camcorder, or VCR. It is compatible with the computerized devices (MP3) via 3.5mm to RCA Converter.

(8) Push Type Speaker Terminal

Lets you easily connect speaker wires directly to the amplifier. The speaker impedance can be ranged from 4 to 8 Ohms for the general stereo output. The total speaker impedance must be at least 4-Ohm per channel at stereo mode.


(9)110/220 Voltage Selector


This amplifier has selectable input voltage from 110V/60Hz (the standard in USA and CANADA) to 220V/50Hz (for EUROPEAN operation). Please make sure the switch is in the proper position before operating, otherwise, the severe damage will be incurred and not covered by the warranty.

(10)Replaceable Power Fuse

The amplifier uses a fuse for protection against surges and short circuit. If the amplifier suddenly turns off and will not turn on, check the fuse and if necessary replace it with a 1.5-amp, 250-volt, fast-acting, 5x20mm fuse (not supplied).

CONNECTION DIAGRAM

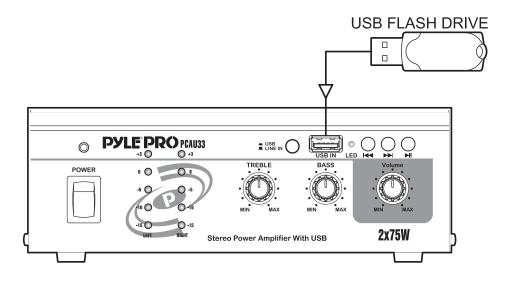

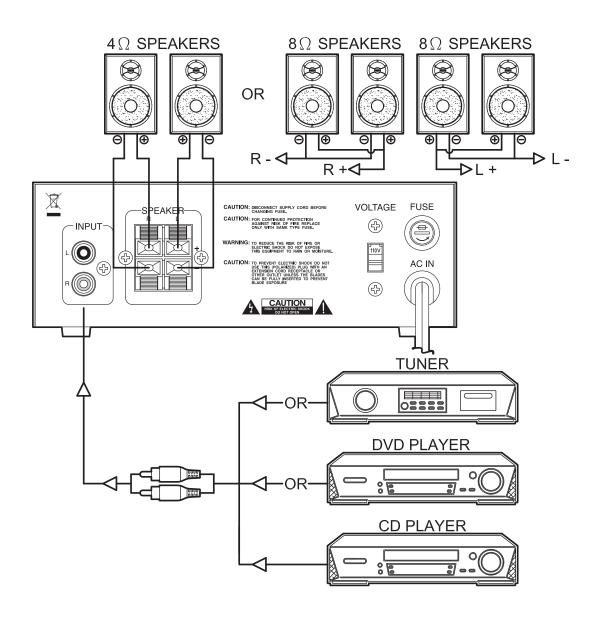

Specifications

Output Power, 2 channels driven 4-Ohm, 1 kHz, 1% THD 15Wx2 4-Ohm, 1 kHz, 10% THD 23Wx2 Max Power 75Wx2
Total Harmonic Distortion, 1 kHz Rated Power
Input Sensitivity, 1 kHz, 4-Ohm Rated Power LINE
Frequency Response
Signal to Noise Ratio, 1 kHz, 4-Ohm Rated Power LINE
Tone Controls BASS
Power Requirement

Specifications are typical; individual units might vary.

Specifications are subject to change and improvement without notice.

Limited Warranty

All PYLE PRO products are carefully constructed and tested before shipment. Units purchased in the USA are warranted to be free of defects in material and workmanship for one (1) year from the date of purchase. This warranty is limited to the original retail purchaser of the amplifier.

Should the unit fail due to factory defects in material or workmanship, your unit will be repaired or replaced at the sole discretion of PYLE.

To obtain warranty service, you must first call our Consumer Return Hotline at (718) 236-6948 to obtain a Return Authorization Number. This R.A. # must appear on the outside of your package and on all paperwork relating to your return.

When returning the unit to us for warranty service, it must be carefully packed and shipped, prepaid, to:

> R.A.#: ______ PYLE PRO Service Center 1600 63rd Street Brooklyn, NY 11204

You must also include the following items with your return:

- A copy of your sales receipt or other proof of purchase
- A brief letter, indicating the problem you are experiencing with the product
 Include in your letter your return address, daytime phone number and R.A. number
 Also include a check or money order for \$20.00 for return

shipping, handling and insurance, or provide your Visa/MC number with expiration date.

Our obligation under this warranty is limited to the repair or replacement of the defective unit when it is returned to us prepaid. This warranty will be considered void if the unit was tampered with, improperly serviced or subject to misuse, neglect or accidental damage.

lacktriangleright Please complete warranty card, detach and return lacktriangleright

Thank you for purchasing this PYLE product. To activate your warranty, please mail this card within 10 days.

warranty registration card

Name	PYLE PRO AMPLIFIER
Address	
City, State ZIP	
Model No.	Serial # (if available)
Date of Purchase	
Purchased at:	
Music Products Store Catalog Merchandiser	Sound Contractor/Installer Mail OrderOther

Care and Maintenance

Your Pyle Pro Amplifier is an example of superior design and craftsmanship. The following suggestions will help you care for your amplifier so you can enjoy years of use:

- Keep the amplifier dry. If it gets wet, wipe immediately.
- Use the amplifier only in well-ventilated installations.
- Handle the amplifier gently and carefully do nto drop!
- Keep the amplifier away from dust adn dirt.
- Wipe occasionally with a damp cloth to keep it looking new.

Do not use harsh chemicals, solvents or detergents!

▼ Please complete warranty card, detach and return ▼		
	Place	
	Stamp Here	
	Here	

